

Fuji, fujitsu, Минск +375447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты
email minsk17@tut.by tel.+375 29 758 47 80 мтс

каталог, описание, технические, характеристики, datasheet, параметры,
маркировка, габариты, фото, модуль, Fuji, fujitsu, реле

КАТАЛОГ

модуль , igbt, мост диодный, реле

купить, продажа


ЭЛЕКТРОННЫЕ КОМПОНЕНТЫ

Мы не работаем с частными (физическими) лицами. Мы работаем только с юридическими лицами (организациями) и ИП и только по безналичному расчёту.

[где и как купить в Минске?](#)



FUJI SEMICONDUCTORS

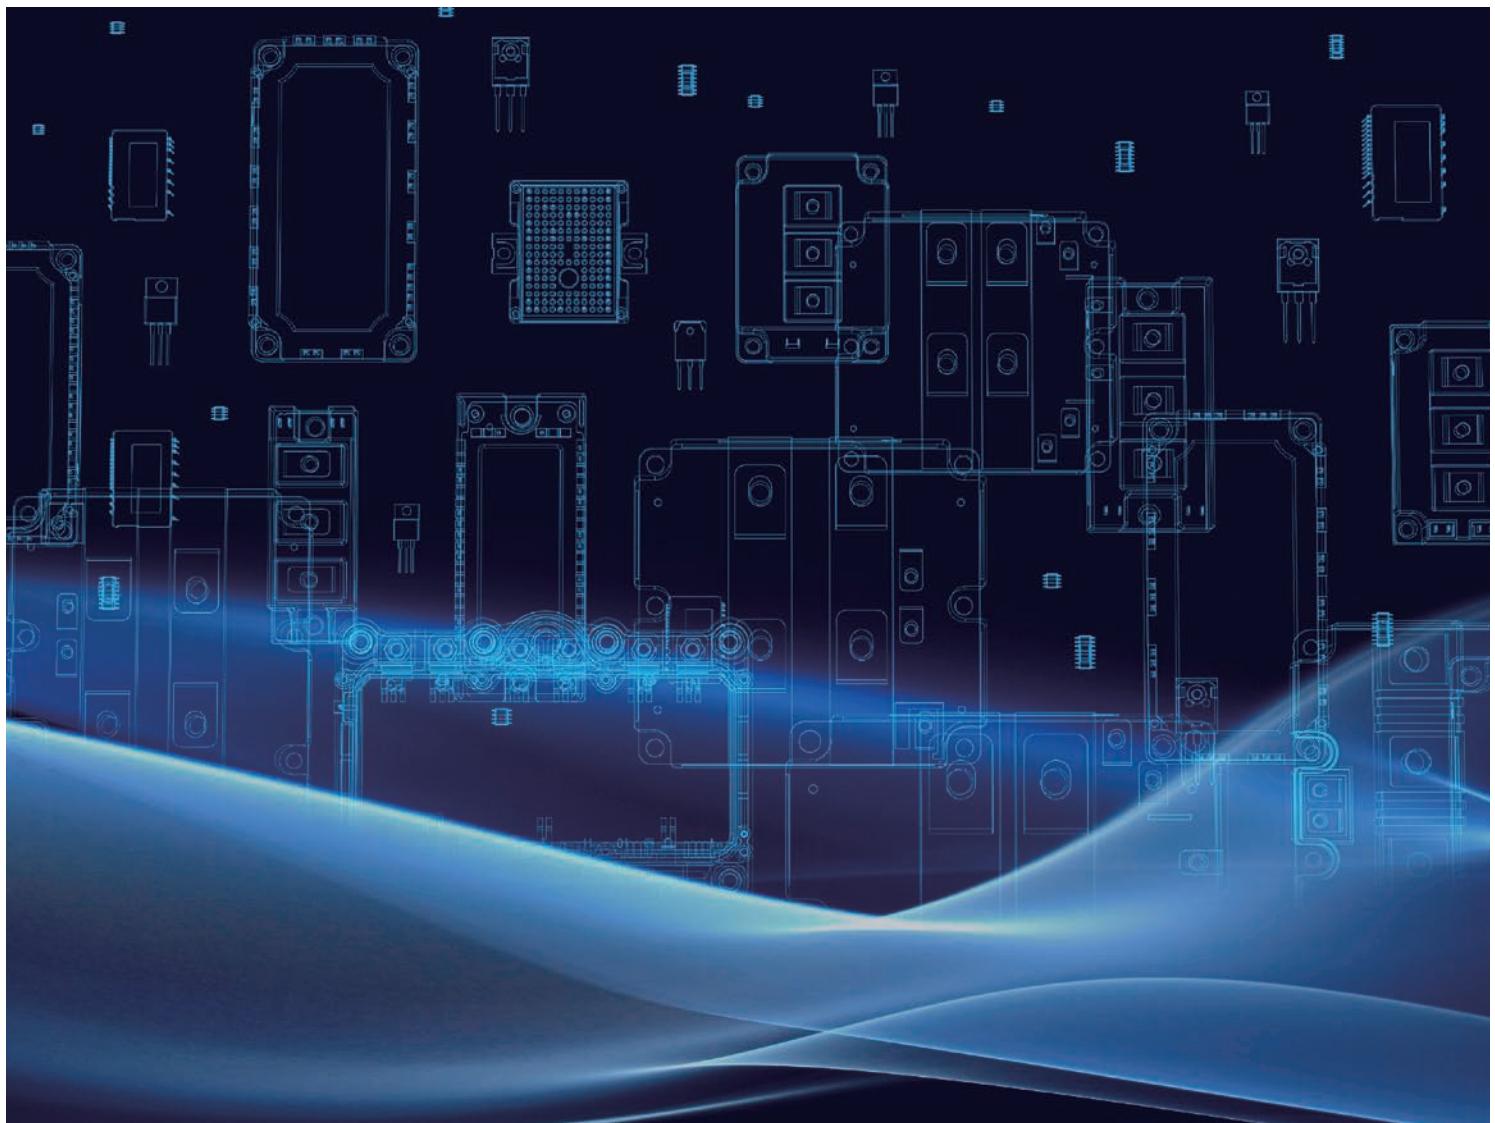

Supporting Society with
Energy and Environmental Technology



Fuji Electric Power Semiconductors contributing Energy Management in various fields

Fuji Electric provides Power Semiconductors enabling high-efficiency energy usage in various fields such as industrial machinery, automobile, railroad, social infrastructure, renewable energy, consumer electronics and information equipment in order to achieve low-carbon society.

Fuji Electric contributes to realization of safe and secure sustainable society through continuous technology innovation and product development of Power Semiconductors as key devices in Power Electronics technology.

The pictures on this page show examples of various applications which may use Fuji Electric Power Semiconductors, they aren't necessarily used in the products in these pictures.





01



Power Devices
(IGBT)
----- P6

02




SiC Devices
----- P50

03




Integrated Circuits
----- P57

04



Power MOSFETs
----- P70

05



Rectifier Diodes
----- P96

06



Pressure Sensors
----- P111


INDEX

Outline	-----	P112
Order Quantity	-----	P131
Number Index	-----	P132
Maintenance products	-----	P137
Discontinued products	-----	P139
Warning	-----	P141

Fuji Electric provides Power Semiconductors well suited for various applications. You will find more information on products for each application shown below at our Web site.

www.fujielectric.com/products/semiconductor/usage/

Inverters



Semiconductor products best suited for general-purpose inverters that carry out variable-speed operation of motors in products such as belt conveyors, fans and pumps

NC / Servos



Semiconductor products best suited to NC and servos that carry out speed control and positioning of machine tools, as well as robots that have multi-spindle control features used in assembly, welding and conveyance

Wind Power Generation




Semiconductor products suitable for AC/DC converters that convert the AC power output from wind turbine generators to DC power, as well as for inverters that convert DC power to the AC power of commercial frequencies

Welding Machines



Semiconductor products suitable for switching circuits that generate resistance heat in welding machines to melt and integrate by adding heat or pressure to two or more metallic members

Switching Power Supplies




Semiconductor products best suited for general-purpose switching power supplies used in a wide variety of applications such as equipment for general consumers and OA and communication devices

Flat-screen TVs



Semiconductor products ideal for the power supplies of TV sets that require low power consumption and large screens that are increasingly thinner and more lightweight

Medium-Voltage Inverters




Semiconductor products suitable for medium-voltage inverters that drive 3-phase AC 3k/6k/6.6kV high-voltage motors used in iron and steel plants, textile plants and paper mills

Railroads



Semiconductor products suited for the power electronics of railroad cars such as the main motor drive and auxiliary power supply equipment of rolling stock

Solar




Semiconductor products best suited for power conditioners that convert solar-panel generated DC power into AC power to enable the residential consumption, as well as to facilitate the recovery of the power to the power systems of power companies

UPS




Semiconductor products ideal for the power conversion circuits of UPS (uninterruptible power supply) that prevent system shutdown during power outages and instantaneous power failures

PC / Servers



Semiconductor products suitable for the power supplies of increasingly high-performance desktop PCs and servers, as well as of increasingly compact and lightweight notebook PCs

Automobiles



IGBT modules, power ICs, MOSFETs and pressure sensors as semiconductor products for automobiles developed with the theme "Car Electronics Solutions - Contributing to the Environment, Safety and Comfort"

CONTENTS

	Page
1. Power Devices (IGBT)	
Features of IGBT Module X Series	6
Features of IGBT Module V Series	6
Products Map	8
IGBT Module Small PIM < X series / V series >	11
IGBT Module PIM < X series / V series >	13
IGBT Module 6-Pack < X series / V series >	18
IGBT Module 6-Pack < V series / U series >	20
IGBT Module 2-Pack < X series / V series >	22
IGBT Module 1-Pack < V series / U series >	34
IGBT Module Chopper < V series / U series >	36
IGBT Module High Speed.....	39
IGBT Module 3-level < V series >.....	40
IGBT Module Small IPM < X series >	42
IGBT Module IPM < V series >	43
Discrete IGBT	46
IGBT Module for Electric Vehicle and Hybrid Electric Vehicle ..	49
2. SiC Devices	
IGBT Hybrid Modules with SiC-SBD V series	50
SiC Schottky-Barrier Diodes (SBD).....	55
3. Integrated Circuits	
Features of Power Supply control ICs	57
AC/DC Power Supply control ICs	59
High and Low side driver ICs.....	68
DC/DC Power Supply control ICs.....	69
4. Power MOSFETs	
MOSFET Super J-MOS® S2 series	70
Features of SuperFAP-E ³ , E ^{3S} series.....	72
Features of SuperFAP-G series	72
Super J MOS® S2 series	74
Super J MOS® S1 series.....	77
SuperFAP-E3 series	79
SuperFAP-G series.....	85
Trench Power MOSFET.....	90
Automotive Super J MOS® S1 series.....	91
Automotive Super J MOS® S2 series	92
Automotive MOSFET (Trench Power MOS, SuperFAP-E ^{3S})....	93
Automotive SuperFAP-E ^{3S} Low Qg series	94
Automotive Trench Power MOSFET.....	94
Automotive IPS series (Intelligent Power Switches).....	95
5. Rectifier Diodes	
Features of SBD, LLD	96
Schottky-Barrier Diodes (SBD)	98
Ultra Low IR Schottky-Barrier Diodes.....	100
Low IR Schottky-Barrier Diodes	101
Super LLD 2 (Critical mode PFC).....	104
Super LLD 3 (Continuous mode PFC).....	105
Low-Loss Fast Recovery Diodes (LLD).....	106
Low-Loss Fast Soft Recovery Diodes (LLD)	107
Schottky-Barrier Diodes (SBD)	108
Low-Loss Fast Recovery Diodes (LLD).....	108
Ultra Fast Recovery Diodes	109
Soft Recovery Fast Recovery Diodes	110
6. Pressure Sensors	
Pressure Sensors	111
Outline	112
Order Quantity	131
Type Number Index	132
Maintenance products	137
Discontinued products	139
Warning	141

IGBT

SiC

IC

MOSFET

Diode

Pressure Sensor

Outline




Power Devices (IGBT)

IGBT

IGBT Module



Fuji Electric has been developing IGBT modules designed to be used as switching elements for power converters of variable-speed drives for motors, uninterruptable power supplies, and more. IGBT has superior characteristics combining the high-speed switching performance of a power MOSFET with the high-voltage/high-current handling capabilities of a bipolar transistor.

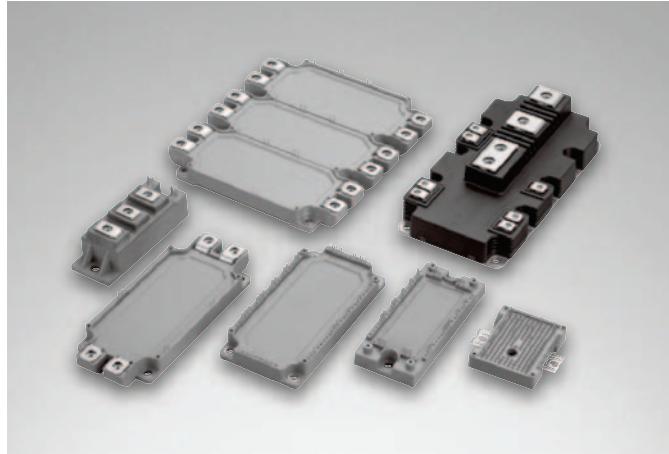

Features of IGBT Module X Series

- Reduces power dissipation to contribute to energy saving
- The IGBT and diode devices of Fuji electric's 7th-generation X series that constitute these modules have been made thinner and miniaturized, thereby optimizing the device structure. This has successfully reduced power dissipation in inverter operation compared with conventional products (Fuji Electric's 6th-generation V Series), contributing to energy saving and power cost reduction of the equipment on which the module is installed.

- Achieves equipment size reduction

A newly developed insulating substrate has been applied in order to improve the module's heat dissipation. Combined with the feature described above (reduced power dissipation) to suppress heat generation, an approximately 36%*1 reduction has been

achieved in comparison to the conventional module. In addition, the maximum temperature guaranteed in continuous operation has been increased from the conventional 150°C to 175°C, which allows the output current to be increased by up to 35%*2 while maintaining the size of the equipment on which the module is installed. This contributes to reducing the size and total cost of the equipment.

*1: Mounting area ratio with 1200 V 75A PIM models

*2: Value estimated from simulation results

- Contributes to improving equipment reliability

Newly developed structures and materials of the module have realized to increase its stability and durability in high-temperature operation. This contributes to improving the stability and reliability of the equipment on which the module is installed.

Features of IGBT Module V Series

- A compact design allows for greater power output

- High performance 6th-generation V series IGBT/FWD chipset
- $T_{vj(max.)}=175^{\circ}\text{C}$, $T_{vj(op)}=150^{\circ}\text{C}$

- Environmentally friendly modules

- Easy assemblage, solder free options
- RoHS compliant (Some parts are Non RoHS.)

- Turn-on switching characteristics

- Improved noise-loss trade-off
- Reduced turn-on dv/dt, excellent turn-on dic/dt

- Turn-off switching characteristic

- Soft switching behavior, turn-off oscillation free

■ Product lineup

Number of IGBT Switches	Products Category	Page	Internal Configuration			Max V_{CE}					Rated Current					
			IGBT Module			Discrete IGBT	600V	650V	1200V	1700V	3300V	$\leq 50A$	$>50A \leq 150A$	$>150A \leq 300A$	$>300A \leq 600A$	
			Standard Module	Power Integrated Module	Intelligent Power Module		600V	650V	1200V	1700V	3300V	$\leq 50A$	$>50A \leq 150A$	$>150A \leq 300A$	$>300A \leq 600A$	$>600A \leq 1200A$
7	Small-PIM	11,12		✓				✓	✓	✓		✓				
	PIM EconoPIM™	13,15 14,16		✓				✓	✓			✓	✓			
6	6-pack	18 20 21	✓					✓	✓			✓	✓	✓		
2	Standard 2-pack	22 23,26 25,28	✓					✓	✓			✓	✓	✓		
1	Standard 1-pack	34	✓						✓	✓			✓	✓	✓	✓
	Chopper	36	✓					✓		✓		✓	✓	✓	✓	
1,2	High Speed Module	39	✓						✓			✓	✓	✓		
	High Power Module	30,31,35	✓						✓	✓	✓		✓	✓	✓	✓
	PrimePACK™	32,33,37,38	✓						✓	✓			✓	✓	✓	✓
4,12	T/I-type NPC 3-level	40,41	Reverse-Blocking IGBTs are integrated.				✓		✓	✓		✓	✓	✓	✓	✓
6,7	IPM	42,43,44					✓	✓	✓			✓	✓	✓	✓	✓
1	Discrete IGBT	45					✓	✓	✓	✓		✓	✓			
1	Discrete RB-IGBT	48					✓	✓					✓			
2	IPM for EV/HEV	49			✓					✓					✓	
6	6-pack for EV/HEV	49	✓						✓(750V)					✓	✓	✓

Note: PrimePACK™ is registered trademark of Infineon Technologies AG, Germany.

EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.

■ Part numbers

6MBI100XBA120-50 (example)

6	MB	I	100	X	BA	120	50
Number of IGBT Switches	IGBT Module	Internal Configuration	Rated Current	IGBT Device Technology	Package Type	Max. V_{CE}	RoHS Compliant
		I: Standard Modules R: Power Integrated Modules P: Intelligent Power Modules	x 1 (A) ex) 100:100A	X: X series (7th Generation) V: V series (6th Generation) U: U series (5th Generation)	See the Products map	060: 600V 065: 650V 120: 1200V 170: 1700V 330: 3300V	50 to 99 RoHS Compliant

■ Letter symbols

Letter symbols

V_{CES} : Collector-to-emitter rated voltage
(Gate-to-emitter short-circuited)
 V_{GES} : Gate-to-emitter rated voltage
(Collector-to-emitter short-circuited)
 I_c : Rated collector current
 P_c : Maximum power dissipation

$V_{CE(sat)}$: Collector-to-emitter saturation voltage
 t_{on} : Turn-on time
 t_{off} : Turn-off time
 t_f : Fall time
 $t_{d(on)}$: Turn-on time
 $t_{d(off)}$: Turn-off time




Power Devices (IGBT)

Products Map

PIM (Power Integrated Modules)

IGBT series & Package type				Size	Page	
V series		X series				
Solder pins	Press fit pins	Solder pins	Press fit pins			
VKC	VKA	XKC	XKA	33.8x62.8mm	11,12	
VKD	VKB	XKD	XKB	56.7x62.8mm	11,12	
VA, VM, VP	VW, VY	XM□, XP□	XW□, XY□	45x107.5mm	13,14,15,16	
VB, VN, VR	VX, VZ	XN□, XR□	XX□, XZ□	62x122mm	13,14,15,16	EconoPIM™


Note:EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.

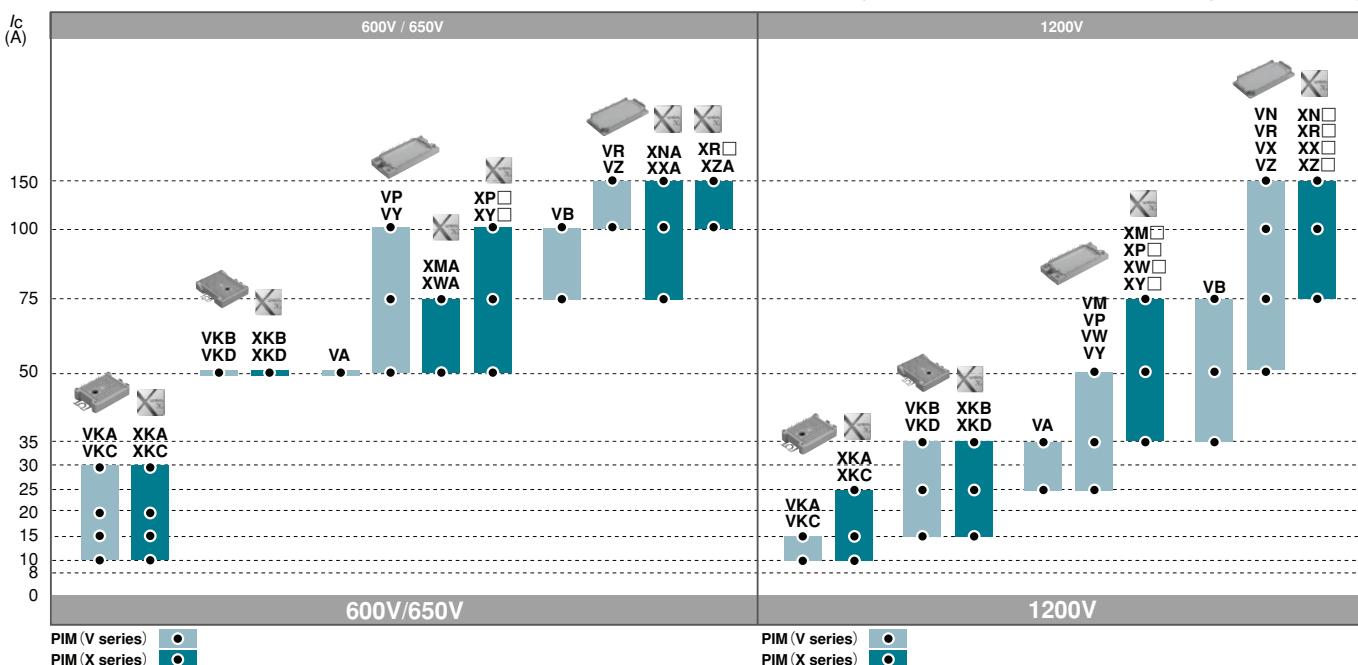

6-Pack

IGBT series & Package type				Size	Page	
V/U series		X series				
Solder pins	Press fit pins	Solder pins	Press fit pins			
VA,	VW	XAE		45x107.5mm	18	
VB, U4B	VX	XB□	XX□	62x122mm	18,20	EconoPACK™
V				150x162mm	21	EconoPACK™+



Note:EconoPACK™ and EconoPACK™+ are registered trademark of Infineon Technologies AG, Germany.

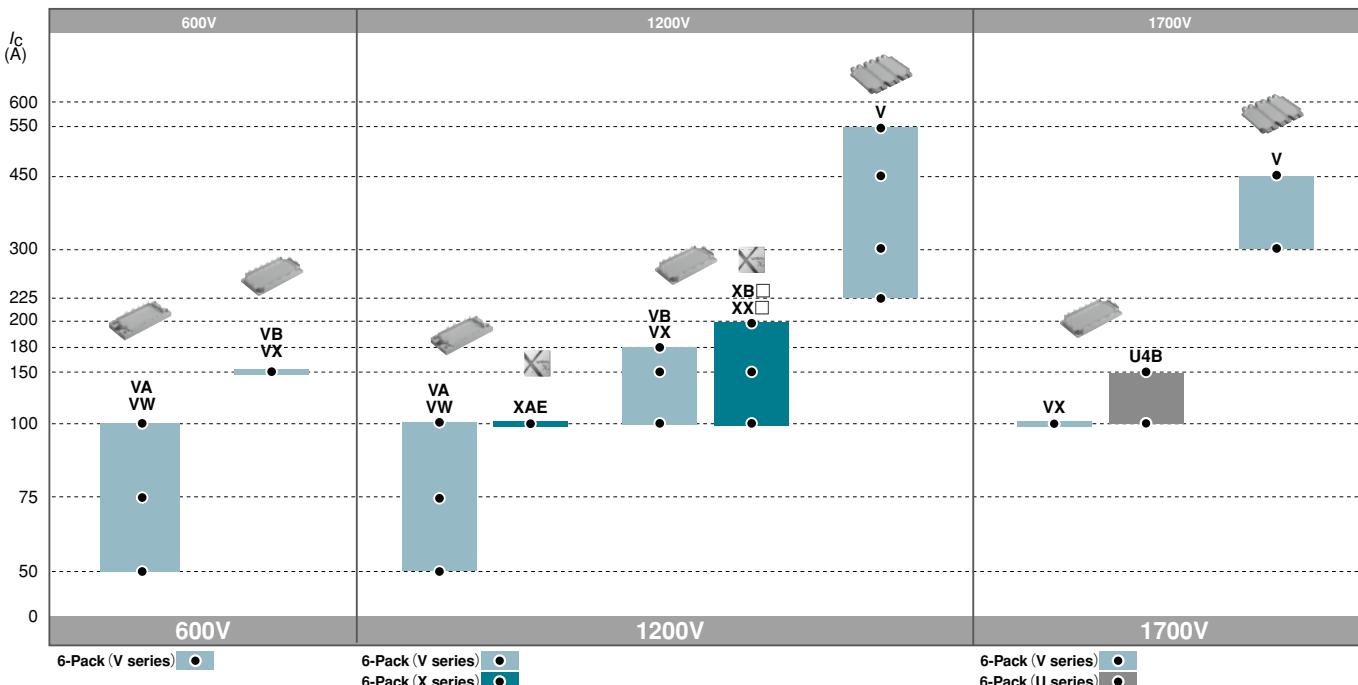

2-Pack

2MBI	Ic	IGBT series & Package type	Size	Page	
V series	X series				
VA	XAA	34x94mm	22,23,25		
VB	XBE	45x92mm	22,23		
VD	XDE	62x108mm	22,23		
VE	XEE	80x110mm	22,23,25		
VH	XHA	62x108mm	23,25		
VJ, VN, VX	XN□	62x150mm	26,28		
-	XUF, XVF	100x140mm	30	HPnC	
VG, VT	-	140x130mm	31	High Power Module	
VXA	XXA, XXE	89x172mm	32,33		
VXB	XXB, XXF	89x250mm	32,33	PrimePACK™	

PrimePACK™ is registered trademark of Infineon Technologies AG, Germany

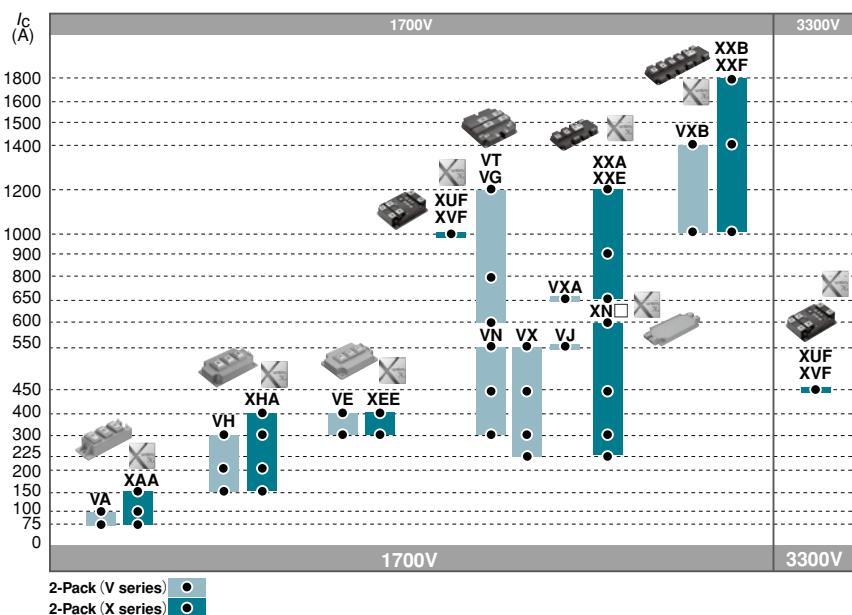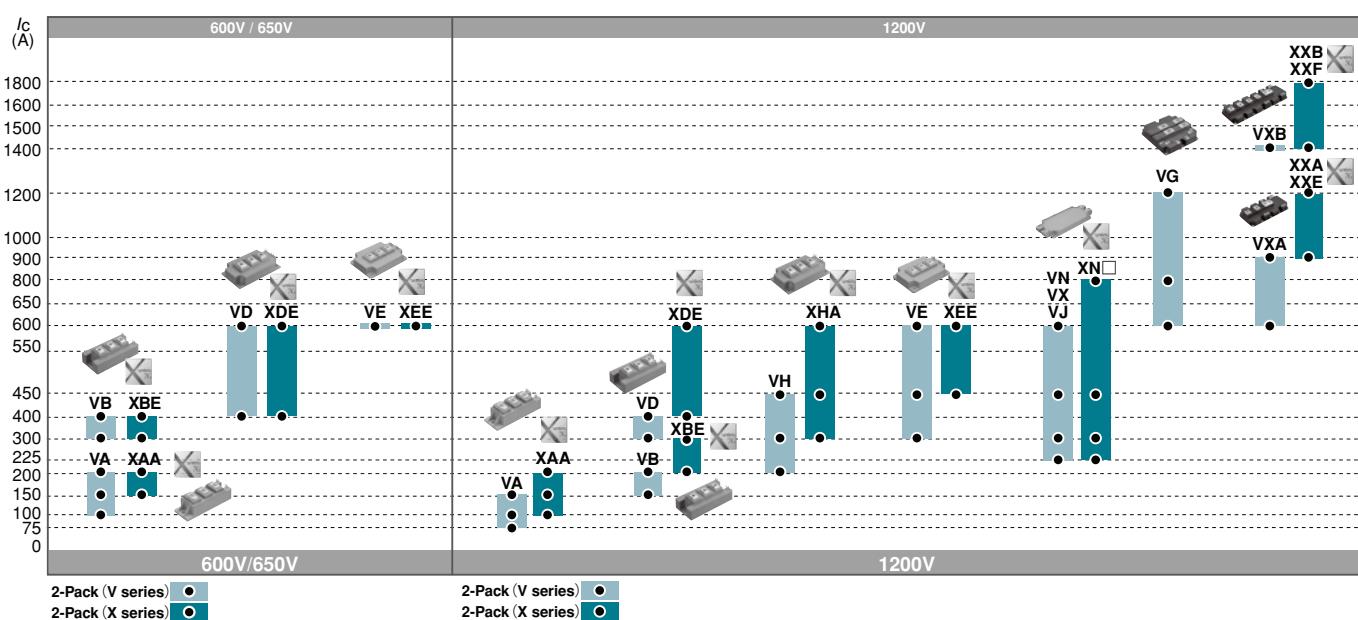




Power Devices (IGBT)

1-Pack

1MBI

Ic

IGBT series & Package type	Size	Page	
V/U series			
V	62×108mm	34	Standard Pack
VC, VR, UG	140×130mm	35	
VD, VS, UE	140×190mm	35	High Powe Module

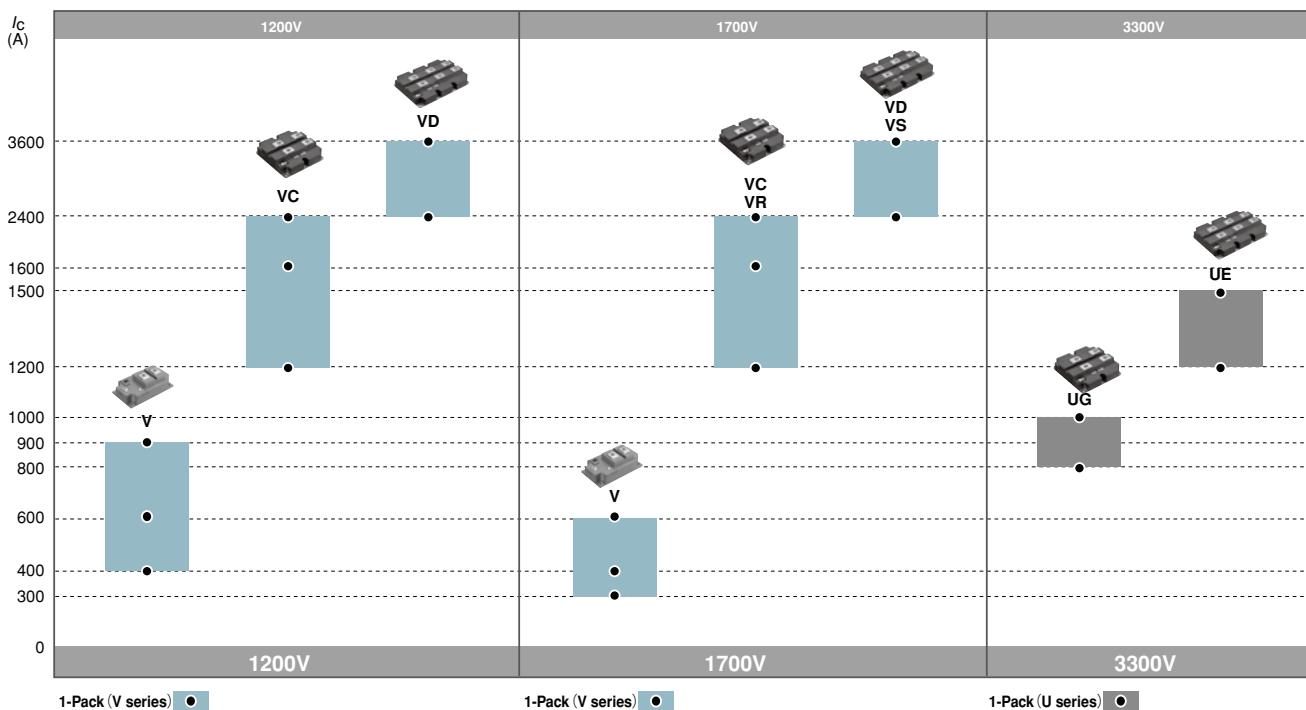


IPM (Intelligent Power Modules)

6/7MPB









Ic

IGBT series & Package type	Size	V series		X series	Page
		7 in 1	6 in 1	6 in 1	
XSD, XSF	26×43mm	-	-	✓	42
VAA	49.5×70mm	-	✓	-	43
VBA	50.2×87mm	-	✓	-	43
VFN	55×90mm	✓	✓	-	43
VDA, VDN	84×128.5mm	✓	✓	-	44
VEA	110×142mm	✓	✓	-	44

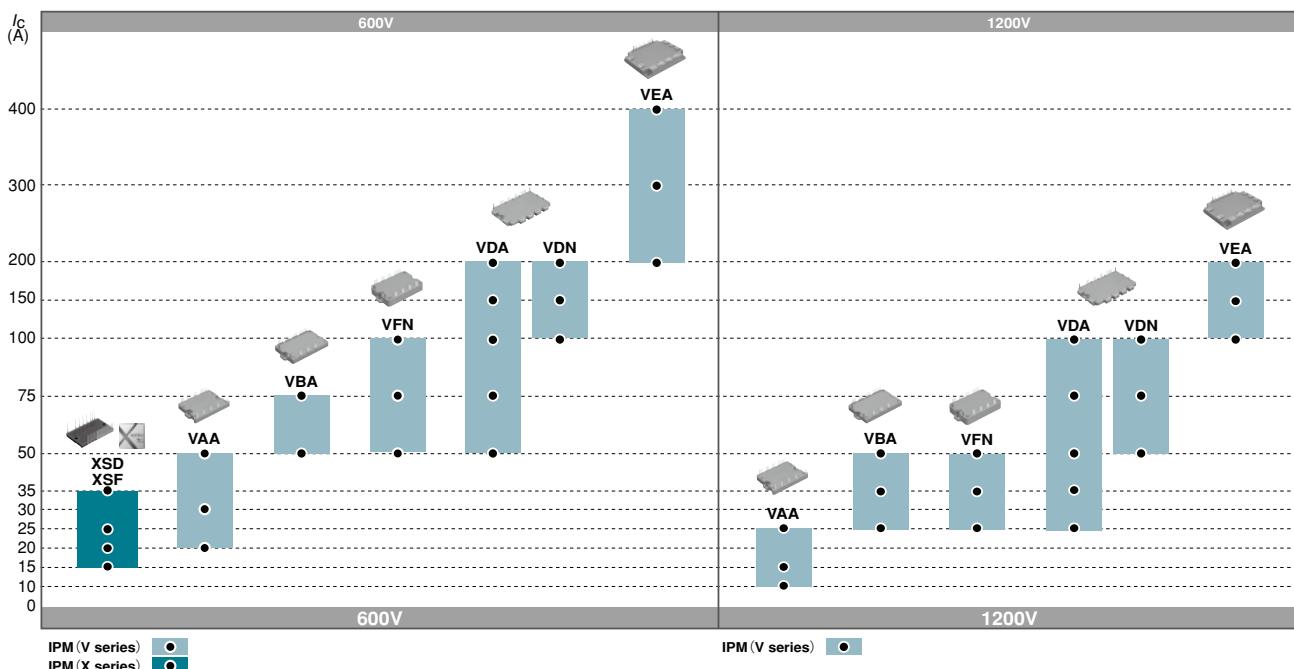

IGBT Module PIM < X series / V series>

■ Small PIM/Built-in converter and brake 650V, 600V class

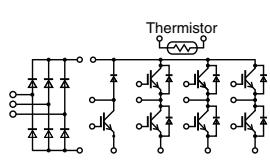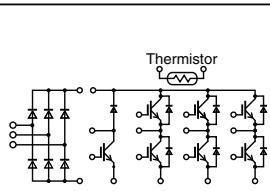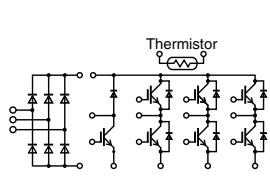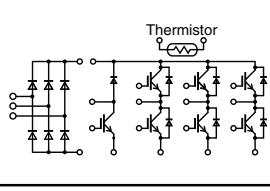Press fit pins			I_C	650V		600V	
				X series	V series	X series	V series
			10A	7MBR10XKA065-50		7MBR10VKA060-50	
			15A	7MBR15XKA065-50		7MBR15VKA060-50	
			20A	7MBR20XKA065-50		7MBR20VKA060-50	
			30A	7MBR30XKA065-50		7MBR30VKA060-50	
Press fit pins			50A	7MBR50XKB065-50		7MBR50VKB060-50	
Solder pins			10A	7MBR10XKC065-50		7MBR10VKC060-50	
Solder pins			15A	7MBR15XKC065-50		7MBR15VKC060-50	
			20A	7MBR20XKC065-50		7MBR20VKC060-50	
			30A	7MBR30XKC065-50		7MBR30VKC060-50	
			50A	7MBR50XKD065-50		7MBR50VKD060-50	

Dimension [mm]

Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass
	V_{CES}	I_C	P_C	$V_{CE(sat)}$	V_{CES}	I_C	V_{RRM}	V_{RRM}	I_o	V_{FM}	I_{FSM}		
	Volts	Cont. Amps.	Watts	Volts	Volts	Cont. Amps.	Volts	Volts	Cont. Amps.	typ. Volts	Amps.		
● 7MBR10XKA065-50	650	10	90	1.30	650	10	650	800	10	0.90	340	M730	25
● 7MBR15XKA065-50	650	15	110	1.30	650	15	650	800	15	0.95	340	M730	25
● 7MBR20XKA065-50	650	20	135	1.30	650	20	650	800	20	1.00	340	M730	25
● 7MBR30XKA065-50	650	30	180	1.30	650	30	650	800	30	1.05	340	M730	25
● 7MBR50XKB065-50	650	50	270	1.30	650	50	650	800	50	1.10	470	M731	45
● 7MBR10XKC065-50	650	10	90	1.30	650	10	650	800	10	0.90	340	M732	25
● 7MBR15XKC065-50	650	15	110	1.30	650	15	650	800	15	0.95	340	M732	25
● 7MBR20XKC065-50	650	20	135	1.30	650	20	650	800	20	1.00	340	M732	25
● 7MBR30XKC065-50	650	30	180	1.30	650	30	650	800	30	1.05	340	M732	25
● 7MBR50XKD065-50	650	50	270	1.30	650	50	650	800	50	1.10	470	M733	45
7MBR10VKA060-50	600	10	70	1.70	600	10	600	800	10	0.95	360	M726	25
7MBR15VKA060-50	600	15	85	1.75	600	15	600	800	15	1.00	360	M726	25
7MBR20VKA060-50	600	20	100	1.70	600	20	600	800	20	1.05	360	M726	25
7MBR30VKA060-50	600	30	125	1.70	600	30	600	800	30	1.15	360	M726	25
7MBR50VKB060-50	600	50	180	1.60	600	50	600	800	50	1.00	580	M727	45
7MBR10VKC060-50	600	10	70	1.70	600	10	600	800	10	0.95	360	M728	25
7MBR15VKC060-50	600	15	85	1.75	600	15	600	800	15	1.00	360	M728	25
7MBR20VKC060-50	600	20	100	1.70	600	20	600	800	20	1.05	360	M728	25
7MBR30VKC060-50	600	30	125	1.70	600	30	600	800	30	1.15	360	M728	25
7MBR50VKD060-50	600	50	180	1.60	600	50	600	800	50	1.00	580	M729	45

● : New products

 $V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip

IGBT Module PIM < X series / V series >

■ Small PIM/Built-in converter and brake 1200V class

		1200V	
I_C	X series	V series	
10A	7MBR10XKA120-50	7MBR10VKA120-50	
15A	7MBR15XKA120-50	7MBR15VKA120-50	
25A	7MBR25XKA120-50		
15A	7MBR15XKB120-50	7MBR15VKB120-50	
25A	7MBR25XKB120-50	7MBR25VKB120-50	
35A	7MBR35XKB120-50	7MBR35VKB120-50	
10A	7MBR10XKC120-50	7MBR10VKC120-50	
15A	7MBR15XKC120-50	7MBR15VKC120-50	
25A	7MBR25XKC120-50		
15A	7MBR15XKD120-50	7MBR15VKD120-50	
25A	7MBR25XKD120-50	7MBR25VKD120-50	
35A	7MBR35XKD120-50	7MBR35VKD120-50	

Dimension [mm]















Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass
	V_{CES}	I_c	P_C	$V_{CE(sat)}$	V_{CES}	I_c	V_{RRM}	V_{RRM}	I_o	V_{FM}	I_{FSM}		
	Cont.	typ.			Cont.	typ.		Cont.	typ.				
Volts	Amps.	Watts	Volts	Volts	Amps.	Volts	Volts	Amps.	Volts	Amps.	Amps.	Grams	
● 7MBR10XKA120-50	1200	10	105	1.50	1200	10	1200	1600	10	0.95	300	M730	25
● 7MBR15XKA120-50	1200	15	135	1.50	1200	15	1200	1600	15	1.00	300	M730	25
● 7MBR25XKA120-50	1200	25	155	1.70	1200	25	1200	1600	25	1.05	300	M730	25
● 7MBR15XKB120-50	1200	15	135	1.50	1200	15	1200	1600	15	0.95	385	M731	45
● 7MBR25XKB120-50	1200	25	195	1.50	1200	25	1200	1600	25	1.00	385	M731	45
● 7MBR35XKB120-50	1200	35	255	1.50	1200	35	1200	1600	35	1.05	385	M731	45
● 7MBR10XKC120-50	1200	10	105	1.50	1200	10	1200	1600	10	0.95	300	M732	25
● 7MBR15XKC120-50	1200	15	135	1.50	1200	15	1200	1600	15	1.00	300	M732	25
● 7MBR25XKC120-50	1200	25	155	1.70	1200	25	1200	1600	25	1.05	300	M732	25
● 7MBR15XKD120-50	1200	15	135	1.50	1200	15	1200	1600	15	0.95	385	M733	45
● 7MBR25XKD120-50	1200	25	195	1.50	1200	25	1200	1600	25	1.00	385	M733	45
● 7MBR35XKD120-50	1200	35	255	1.50	1200	35	1200	1600	35	1.05	385	M733	45
7MBR10VKA120-50	1200	10	110	1.85	1200	10	1200	1600	10	0.95	245	M726	25
7MBR15VKA120-50	1200	15	135	1.90	1200	15	1200	1600	15	1.00	245	M726	25
7MBR15VKB120-50	1200	15	135	1.90	1200	15	1200	1600	15	1.00	245	M727	45
7MBR25VKB120-50	1200	25	180	1.85	1200	25	1200	1600	25	1.00	370	M727	45
7MBR35VKB120-50	1200	35	215	1.85	1200	35	1200	1600	35	1.05	370	M727	45
7MBR10VKC120-50	1200	10	110	1.85	1200	10	1200	1600	10	0.95	245	M728	25
7MBR15VKC120-50	1200	15	135	1.90	1200	15	1200	1600	15	1.00	245	M728	25
7MBR15VKD120-50	1200	15	135	1.90	1200	15	1200	1600	15	1.00	245	M729	45
7MBR25VKD120-50	1200	25	180	1.85	1200	25	1200	1600	25	1.00	370	M729	45
7MBR35VKD120-50	1200	35	215	1.85	1200	35	1200	1600	35	1.05	370	M729	45

● : New products

$V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip

IGBT Module PIM < X series / V series >

■ PIM/Built-in converter and brake EconoPIM™ 650V, 600V class

Solder pins	 M711			I_c	650V X series	600V V series
Solder pins	 M712			50A	7MBR50VA060-50	
Solder pins	 M719			75A	7MBR75VB060-50	
Solder pins	 M720			100A	7MBR100VB060-50	
Solder pins	 M719			50A	7MBR50XMA065-50	
Solder pins	 M720			75A	7MBR75XMA065-50	
Solder pins	 M719			100A	7MBR100XNA065-50	
Solder pins	 M720			150A	7MBR150XNA065-50	
Solder pins	 M719			50A	7MBR50XPA065-50	7MBR50VP060-50
Solder pins	 M720			75A	7MBR75XPA065-50	7MBR75VP060-50
Solder pins	 M719			100A	7MBR100XPE065-50	7MBR100VP060-50
Solder pins	 M720			100A	7MBR100XRA065-50	7MBR100VR060-50
Solder pins	 M719			150A	7MBR150XRA065-50	7MBR150VR060-50
Solder pins	 M720			150A	7MBR150RE065-50	

Dimension [mm]

Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass
	V_{CES}	I_c	P_c	$V_{CE(sat)}$	V_{CES}	I_c	V_{RRM}	V_{RRM}	I_o	V_{FM}	I_{FSM}		
	Cont.	typ.	Volts	Amps.	Volts	Cont.	Volts	Volts	Cont.	typ.	Amps.		
● 7MBR50XMA065-50	650	50	210	1.3	650	30	650	800	50	1.05	505	M719	200
● 7MBR75XMA065-50	650	75	270	1.3	650	50	650	800	75	1.15	505	M719	200
● 7MBR75XNA065-50	650	75	270	1.3	650	50	650	800	75	1.15	505	M720	310
● 7MBR100XNA065-50	650	100	330	1.3	650	50	650	800	100	1.1	745	M720	310
● 7MBR150XNA065-50	650	150	450	1.3	650	75	650	800	150	1.1	1260	M720	310
● 7MBR50XPA065-50	650	50	210	1.3	650	30	650	800	50	1.05	545	M719	200
● 7MBR75XPA065-50	650	75	270	1.3	650	50	650	800	75	1.15	505	M719	200
● 7MBR100XPE065-50	650	100	480	1.3	650	50	650	800	100	1.1	745	M719	200
● 7MBR100XRA065-50	650	100	330	1.3	650	50	650	800	100	1.1	745	M720	310
● 7MBR150XRA065-50	650	150	450	1.3	650	75	650	800	150	1.1	1260	M720	310
● 7MBR150XRE065-50	650	150	700	1.3	650	75	650	800	150	1.1	1260	M720	310
7MBR50VA060-50	600	50	200	1.6	600	50	600	800	50	1.3	210	M711	180
7MBR75VB060-50	600	75	300	1.6	600	50	600	800	75	1.25	500	M712	300
7MBR100VB060-50	600	100	335	1.6	600	50	600	800	100	1.25	700	M712	300
7MBR50VP060-50	600	50	200	1.6	600	50	600	800	50	1.3	210	M719	200
7MBR75VP060-50	600	75	300	1.6	600	50	600	800	75	1.25	500	M719	200
7MBR100VP060-50	600	100	430	1.85	600	50	600	800	100	1.25	700	M719	200
7MBR100VR060-50	600	100	335	1.6	600	50	600	800	100	1.25	700	M720	310
7MBR150VR060-50	600	150	485	1.6	600	75	600	800	150	1.25	960	M720	310

Note: EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.

$V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip


● : New products




IGBT Module PIM < X series / V series >

■ PIM/Built-in converter and brake EconoPIM™ 1200V class

Solder pins




M711



Solder pins




M712



Solder pins




M719



Solder pins




M720



Solder pins




M719



Solder pins



M720



I_C	1200V	
	X series	V series
25A		7MBR25VA120-50
35A		7MBR35VA120-50
35A		7MBR35VB120-50
50A		7MBR50VB120-50
75A		7MBR75VB120-50
25A		7MBR25VM120-50
35A	7MBR35XMA120-50	7MBR35VM120-50
50A	7MBR50XMA120-50	7MBR50VM120-50
75A	7MBR75XME120-50	
50A		7MBR50VN120-50
75A	7MBR75XNA120-50	7MBR75VN120-50
100A	7MBR100XNA120-50	7MBR100VN120-50
150A	7MBR150XNE120-50	7MBR150VN120-50
25A		7MBR25VP120-50
35A	7MBR35XPA120-50	7MBR35VP120-50
50A	7MBR50XPA120-50	7MBR50VP120-50
75A	7MBR75XPE120-50	
50A		7MBR50VR120-50
75A	7MBR75XRA120-50	7MBR75VR120-50
100A	7MBR100XRA120-50	7MBR100VR120-50
	7MBR100XRE120-50	
150A	7MBR150XRE120-50	7MBR150VR120-50

Dimension [mm]

Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass Grams
	V_{CES} Volts	I_C Cont. Amps.	P_c Watts	$V_{CE(sat)}$ typ. Volts	V_{CES} Volts	I_C Cont. Amps.	V_{RRM} Volts	V_{RRM} Volts	I_o Cont. Amps.	V_{FM} typ. Volts	I_{FSM} Amps.		
● 7MBR35XMA120-50	1200	35	200	1.5	1200	25	1200	1600	35	1.05	385	M719	200
● 7MBR50XMA120-50	1200	50	250	1.5	1200	35	1200	1600	50	1.05	520	M719	200
● 7MBR75XME120-50	1200	75	455	1.55	1200	35	1200	1600	75	1.15	520	M719	200
● 7MBR75XNA120-50	1200	75	335	1.5	1200	50	1200	1600	75	1.15	520	M720	310
● 7MBR100XNA120-50	1200	100	445	1.45	1200	75	1200	1600	100	1.05	775	M720	310
● 7MBR150XNE120-50	1200	150	880	1.5	1200	75	1200	1600	150	1.05	1400	M720	310
● 7MBR35XPA120-50	1200	35	200	1.5	1200	25	1200	1600	35	1.05	385	M719	200
● 7MBR50XPA120-50	1200	50	250	1.5	1200	35	1200	1600	50	1.05	520	M719	200
● 7MBR50XPE120-50	1200	50	340	1.5	1200	35	1200	1600	50	1.05	520	M719	200
● 7MBR75XPE120-50	1200	75	455	1.55	1200	35	1200	1600	75	1.15	520	M719	200
● 7MBR75XRA120-50	1200	75	335	1.5	1200	50	1200	1600	75	1.15	520	M720	310
● 7MBR75XRE120-50	1200	75	525	1.5	1200	50	1200	1600	75	1.0	775	M720	310
● 7MBR100XRA120-50	1200	100	445	1.45	1200	75	1200	1600	100	1.05	775	M720	310
● 7MBR100XRE120-50	1200	100	685	1.45	1200	75	1200	1600	100	1.05	775	M720	310
● 7MBR150XRE120-50	1200	150	880	1.5	1200	75	1200	1600	150	1.05	1400	M720	310
7MBR25VA120-50	1200	25	170	1.85	1200	25	1200	1600	25	1.42	155	M711	180
7MBR35VA120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M711	180
7MBR35VB120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M712	300
7MBR50VB120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M712	300
7MBR75VB120-50	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M712	300
7MBR25VM120-50	1200	25	170	1.85	1200	25	1200	1600	25	1.4	155	M719	200
7MBR35VP120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M719	200
7MBR50VP120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M719	200
7MBR50VM120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M719	200
7MBR50VN120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M720	310
7MBR75VN120-50	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M720	310
7MBR100VN120-50	1200	100	520	1.75	1200	75	1200	1600	100	1.5	520	M720	310
7MBR150VN120-50	1200	150	885	1.85	1200	100	1200	1600	150	1.4	780	M720	310
7MBR25VP120-50	1200	25	170	1.85	1200	25	1200	1600	25	1.4	155	M719	200
7MBR35VP120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M719	200
7MBR50VP120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M719	200
7MBR50VR120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M720	310
7MBR75VR120-50	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M720	310
7MBR100VR120-50	1200	100	520	1.75	1200	75	1200	1600	100	1.5	520	M720	310
7MBR150VR120-50	1200	150	885	1.85	1200	100	1200	1600	150	1.4	780	M720	310

Note: EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.

 $V_{CE(sat)}$, V_{FM} : at $T_j=25^\circ\text{C}$, Chip

● : New products

IGBT Module PIM < X series / V series >

■ PIM/Built-in converter and brake EconoPIM™ 650V, 600V class

Ic	650V	600V
	X series	V series
50A	7MBR50XWA065-50	
75A	7MBR75XWA065-50	
75A	7MBR75XXA065-50	
100A	7MBR100XXA065-50	
150A	7MBR150XXA065-50	
50A	7MBR50XYA065-50	7MBR50VY060-50
		7MBR50VY060-80
75A	7MBR75XYA065-50	7MBR75VY060-50
		7MBR75VY060-80
100A	7MBR100XYE065-50	7MBR100VY060-50
		7MBR100VY060-80
100A	7MBR100XZA065-50	7MBR100VZ060-50
		7MBR100VZ060-80
150A	7MBR150XZA065-50	7MBR150VZ060-50
		7MBR150VZ060-80

Dimension [mm]

Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass
	V_{CES}	I_c	P_c	$V_{CE(sat)}$	V_{CES}	I_c	V_{RRM}	V_{RRM}	I_o	V_{FM}	I_{FSM}		
	Cont.	typ.	Cont.	typ.	Cont.	typ.	typ.	Cont.	typ.	Cont.	typ.		
Volts	Amps.	Watts	Volts	Volts	Amps.	Volts	Volts	Amps.	Volts	Amps.	Amps.	Grams	
● 7MBR50XWA065-50	650	50	210	1.3	650	30	650	800	50	1.05	505	M721	200
● 7MBR75XWA065-50	650	75	270	1.3	650	50	650	800	75	1.15	505	M721	200
● 7MBR75XXA065-50	650	75	270	1.3	650	50	650	800	75	1.15	505	M722	310
● 7MBR100XXA065-50	650	100	330	1.3	650	50	650	800	100	1.1	745	M722	310
● 7MBR150XXA065-50	650	150	450	1.3	650	75	650	800	150	1.1	1260	M722	310
● 7MBR50XYA065-50	650	50	210	1.3	650	30	650	800	50	1.05	545	M721	200
● 7MBR75XYA065-50	650	75	270	1.3	650	50	650	800	75	1.15	505	M721	200
● 7MBR100XYE065-50	650	100	480	1.3	650	50	650	800	100	1.1	745	M721	200
● 7MBR100XZA065-50	650	100	330	1.3	650	50	650	800	100	1.1	745	M722	310
● 7MBR150XZA065-50	650	150	450	1.3	650	75	650	800	150	1.1	1260	M722	310
7MBR50VY060-50	600	50	215	1.6	600	50	600	800	50	1.3	210	M721	200
7MBR50VY060-80	600	50	215	1.6	600	50	600	800	50	1.3	210	M721	200
7MBR75VY060-50	600	75	300	1.6	600	50	600	800	75	1.25	500	M721	200
7MBR75VY060-80	600	75	300	1.6	600	50	600	800	75	1.25	500	M721	200
7MBR100VY060-50	600	100	430	1.85	600	50	600	800	100	1.25	700	M721	200
7MBR100VY060-80	600	100	430	1.85	600	50	600	800	100	1.25	700	M721	200
7MBR100VZ060-50	600	100	335	1.6	600	50	600	800	100	1.25	700	M722	310
7MBR100VZ060-80	600	100	335	1.6	600	50	600	800	100	1.25	700	M722	310
7MBR150VZ060-50	600	150	485	1.6	600	75	600	800	150	1.25	960	M722	310
7MBR150VZ060-80	600	150	485	1.6	600	75	600	800	150	1.25	960	M722	310

Note1: EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.

$V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip

Note2: "-80" : Pre-Applied Thermal-Interface-Material



● : New products





IGBT Module PIM < X series / V series >

■ PIM/Built-in converter and brake EconoPIM™ 1200V class



Press fit pins





Press fit pins



Press fit pins



Press fit pins



Dimension [mm]

I_c	1200V		
	X series		V series
25A			7MBR25VW120-50
			7MBR25VW120-80
35A	7MBR35XWA120-50		7MBR35VW120-50
			7MBR35VW120-80
50A	7MBR50XWA120-50		7MBR50VW120-50
			7MBR50VW120-80
75A	7MBR75XWE120-50		
50A			7MBR50VX120-50
			7MBR50VX120-80
75A	7MBR75XXA120-50		7MBR75VX120-50
			7MBR75VX120-80
100A	7MBR100XXA120-50		7MBR100VX120-50
			7MBR100VX120-80
150A	7MBR150XXE120-50		7MBR150VX120-50
			7MBR150VX120-80
25A			7MBR25VY120-50
			7MBR25VY120-80
35A	7MBR35XYA120-50		7MBR35VY120-50
			7MBR35VY120-80
50A	7MBR50XYA120-50		7MBR50VY120-50
			7MBR50VY120-80
75A	7MBR75XYE120-50		
50A			7MBR50VZ120-50
			7MBR50VZ120-80
75A	7MBR75XZA120-50		7MBR75VZ120-50
			7MBR75VZ120-80
100A	7MBR100XZA120-50		7MBR100VZ120-50
			7MBR100VZ120-80
150A	7MBR150XZE120-50		7MBR150VZ120-50
			7MBR150VZ120-80

Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass
	V_{CES} Volts	I_c Cont. Amps.	P_C Watts	$V_{CE(sat)}$ typ. Volts	V_{CES} Volts	I_c Cont. Amps.	V_{RRM} Volts	V_{RRM} Volts	I_o Cont. Amps.	V_{FM} typ. Volts	I_{FSM} Amps.		
● 7MBR35XWA120-50	1200	35	200	1.5	1200	25	1200	1600	35	1.05	385	M721	200
● 7MBR50XWA120-50	1200	50	250	1.5	1200	35	1200	1600	50	1.05	520	M721	200
● 7MBR75XWE120-50	1200	75	455	1.55	1200	35	1200	1600	75	1.15	520	M721	200
● 7MBR75XXA120-50	1200	75	335	1.5	1200	50	1200	1600	75	1.15	520	M722	310
● 7MBR100XXA120-50	1200	100	445	1.45	1200	75	1200	1600	100	1.05	775	M722	310
● 7MBR150XXE120-50	1200	150	880	1.5	1200	75	1200	1600	150	1.05	1400	M722	310
● 7MBR35XYA120-50	1200	35	200	1.5	1200	25	1200	1600	35	1.05	385	M721	200
● 7MBR50XYA120-50	1200	50	250	1.5	1200	35	1200	1600	50	1.05	520	M721	200
● 7MBR75XYE120-50	1200	75	455	1.55	1200	35	1200	1600	75	1.15	520	M721	200
● 7MBR75XZA120-50	1200	75	335	1.5	1200	50	1200	1600	75	1.15	520	M722	310
● 7MBR100XZA120-50	1200	100	445	1.45	1200	75	1200	1600	100	1.05	775	M722	310
● 7MBR150XZE120-50	1200	150	880	1.5	1200	75	1200	1600	150	1.05	1400	M722	310

Note1: EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.

 $V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip

Note2: "-80": Pre-Applied Thermal-Interface-Material

●:New products

Device type	Inverter [IGBT]				Brake [IGBT+FWD]			Converter [Diode]				Package	Net mass Grams
	V_{CES} Volts	I_c Cont. Amps.	P_c Watts	$V_{CE(sat)}$ typ. Volts	V_{CES} Volts	I_c Cont. Amps.	V_{RRM} Volts	V_{RRM} Volts	I_o Cont. Amps.	V_{FM} typ. Volts	I_{FSM} Amps.		
7MBR25VW120-50	1200	25	170	1.85	1200	25	1200	1600	25	1.4	155	M721	200
7MBR25VW120-80	1200	25	170	1.85	1200	25	1200	1600	25	1.4	155	M721	200
7MBR35VW120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M721	200
7MBR35VW120-80	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M721	200
7MBR50VW120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M721	200
7MBR50VW120-80	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M721	200
7MBR50VX120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M722	310
7MBR50VX120-80	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M722	310
7MBR75VX120-50	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M722	310
7MBR75VX120-80	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M722	310
7MBR100VX120-50	1200	100	520	1.75	1200	75	1200	1600	100	1.5	520	M722	310
7MBR100VX120-80	1200	100	520	1.75	1200	75	1200	1600	100	1.5	520	M722	310
7MBR150VX120-50	1200	150	885	1.85	1200	100	1200	1600	150	1.4	780	M722	310
7MBR150VX120-80	1200	150	885	1.85	1200	100	1200	1600	150	1.4	780	M722	310
7MBR25VY120-50	1200	25	170	1.85	1200	25	1200	1600	25	1.42	155	M721	200
7MBR25VY120-80	1200	25	170	1.85	1200	25	1200	1600	25	1.42	155	M721	200
7MBR35VY120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M721	200
7MBR35VY120-80	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M721	200
7MBR50VY120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M721	200
7MBR50VY120-80	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M721	200
7MBR50VZ120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M722	310
7MBR50VZ120-80	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M722	310
7MBR75VZ120-50	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M722	310
7MBR75VZ120-80	1200	75	385	1.85	1200	50	1200	1600	75	1.4	520	M722	310
7MBR100VZ120-50	1200	100	520	1.75	1200	75	1200	1600	100	1.5	520	M722	310
7MBR100VZ120-80	1200	100	520	1.75	1200	75	1200	1600	100	1.5	520	M722	310
7MBR150VZ120-50	1200	150	885	1.85	1200	100	1200	1600	150	1.4	780	M722	310
7MBR150VZ120-80	1200	150	885	1.85	1200	100	1200	1600	150	1.4	780	M722	310

Note1: EconoPIM™ is registered trademark of Infineon Technologies AG, Germany.


 $V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip

Note2: "-80" : Pre-Applied Thermal-Interface-Material



IGBT Module 6-Pack < X series / V series >

■ 6-Pack EconoPACK™ 600V, 1200V class

Solder pins		Thermistor	I_C	600V		1200V	
				V series	X series	V series	X series
			50A	6MBI50VA-060-50			6MBI50VA-120-50
			75A	6MBI75VA-060-50			6MBI75VA-120-50
			100A	6MBI100VA-060-50	6MBI100XAE120-50	6MBI100VA-120-50	
			100A			6MBI100XBA120-50	6MBI100VB-120-50
			150A	6MBI150VB-060-50	6MBI150XBA120-50	6MBI150VB-120-50	
			180A				6MBI180VB-120-50
			200A			6MBI200XBA120-50	
						6MBI200XBE120-50	
			50A	6MBI50VW-060-50			6MBI50VW-120-50
			75A	6MBI75VW-060-50			6MBI75VW-120-50
			100A	6MBI100VW-060-50			6MBI100VW-120-50
			100A			6MBI100XXA120-50	6MBI100VX-120-50
			150A	6MBI150VX-060-50	6MBI150XXA120-50	6MBI150VX-120-50	
				6MBI150VX-060-80			6MBI150VX-120-80
			180A				6MBI180VX-120-50
							6MBI180VX-120-80
							6MBI180VX-120-55
			200A			6MBI200XXA120-50	
						6MBI200XXE120-50	

Dimension [mm]

■ X series

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time $t_{d(on)}$ typ. μ sec.	$t_{d(off)}$ typ. μ sec.	t_f typ. μ sec.	Package	Net mass
					typ.	I_C	Volts	Amps.	Volts	Amps.	Grams
○ 6MBI100XAE120-50	1200	± 20	100	685	1.45	100	0.23	0.30	0.12	M669	200
● 6MBI100XBA120-50	1200	± 20	100	445	1.45	100	0.21	0.29	0.1	M668	310
● 6MBI150XBA120-50	1200	± 20	150	625	1.40	150	0.31	0.35	0.15	M668	310
● 6MBI200XBA120-50	1200	± 20	200	750	1.45	200	0.27	0.34	0.12	M668	310
● 6MBI200XBE120-50	1200	± 20	200	1000	1.45	200	0.27	0.34	0.12	M668	310
● 6MBI100XXA120-50	1200	± 20	100	445	1.45	100	0.21	0.29	0.1	M648	310
● 6MBI150XXA120-50	1200	± 20	150	625	1.40	150	0.31	0.35	0.15	M648	310
● 6MBI200XXA120-50	1200	± 20	200	750	1.45	200	0.27	0.34	0.12	M648	310
● 6MBI200XXE120-50	1200	± 20	200	1000	1.45	200	0.27	0.34	0.12	M648	310

■ V series

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.	Package	Net mass
					typ.	I_C	Volts	Amps.	Volts	Amps.	Grams
6MBI50VA-060-50	600	± 20	50	200	1.6	50	0.36	0.52	0.03	M636	180
6MBI75VA-060-50	600	± 20	75	275	1.6	75	0.36	0.52	0.03	M636	180
6MBI100VA-060-50	600	± 20	100	335	1.6	100	0.36	0.52	0.03	M636	180
6MBI150VB-060-50	600	± 20	150	485	1.6	150	0.36	0.52	0.03	M633	300
6MBI50VW-060-50	600	± 20	50	215	1.6	50	0.36	0.52	0.03	M647	200
6MBI75VW-060-50	600	± 20	75	300	1.6	75	0.36	0.52	0.03	M647	200
6MBI100VW-060-50	600	± 20	100	335	1.6	100	0.36	0.52	0.03	M647	200
6MBI150VX-060-50	600	± 20	150	485	1.6	150	0.36	0.52	0.03	M648	310
6MBI150VX-060-80	600	± 20	150	485	1.6	150	0.36	0.52	0.03	M648	310

Note1: EconoPACK™ is registered trademarks of Infineon Technologies AG, Germany.

 $V_{CE(sat)}$: at $T_{j}=25^{\circ}\text{C}$, Chip

Note2: 6MBI180VB-120-55, 6MBI180VX-120-55; Premium type (Low Thermal Impedance Version)

Note3: "-80", "-85": Pre-Applied Thermal-Interface-Material for "-50", "-55"

●: New products ○: Under development

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_C	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
					Volts	Amps.					Grams
6MBI50VA-120-50	1200	± 20	50	280	1.85	50	0.39	0.53	0.06	M636	180
6MBI75VA-120-50	1200	± 20	75	385	1.85	75	0.39	0.53	0.06	M636	180
6MBI100VA-120-50	1200	± 20	100	520	1.75	100	0.39	0.53	0.06	M636	180
6MBI100VB-120-50	1200	± 20	100	520	1.75	100	0.39	0.53	0.06	M633	300
6MBI150VB-120-50	1200	± 20	150	770	1.75	150	0.39	0.53	0.06	M633	300
6MBI180VB-120-50	1200	± 20	150	835	1.85	200	0.39	0.53	0.06	M633	300
6MBI180VB-120-55	1200	± 20	150	1075	1.85	200	0.39	0.53	0.06	M633	300
6MBI50VW-120-50	1200	± 20	50	280	1.85	50	0.39	0.53	0.06	M647	200
6MBI75VW-120-50	1200	± 20	75	385	1.85	75	0.39	0.53	0.06	M647	200
6MBI100VW-120-50	1200	± 20	100	520	1.75	100	0.39	0.53	0.06	M647	200
6MBI100VX-120-50	1200	± 20	100	520	1.75	100	0.39	0.53	0.06	M648	310
6MBI100VX-120-80	1200	± 20	100	520	1.75	100	0.39	0.53	0.06	M648	310
6MBI150VX-120-50	1200	± 20	150	770	1.75	150	0.39	0.53	0.06	M648	310
6MBI150VX-120-80	1200	± 20	150	770	1.75	150	0.39	0.53	0.06	M648	310
6MBI180VX-120-50	1200	± 20	150	835	1.85	200	0.39	0.53	0.06	M648	310
6MBI180VX-120-80	1200	± 20	150	835	1.85	200	0.39	0.53	0.06	M648	310
6MBI180VX-120-55	1200	± 20	150	1075	1.85	200	0.39	0.53	0.06	M648	310
6MBI180VX-120-85	1200	± 20	150	1075	1.85	200	0.39	0.53	0.06	M648	310

Note1: EconoPACK™ is registered trademarks of Infineon Technologies AG, Germany.


Note2: 6MBI180VB-120-55, 6MBI180VX-120-55; Premium type (Low Thermal Impedance Version)

Note3: "-80", "-85": Pre-Applied Thermal-Interface-Material for "-50", "-55"


 $V_{CE(sat)}$: at $T_{vj}=25^\circ C$, Chip

IGBT Module 6-Pack < V series / U series >

■ 6-Pack EconoPACK™ 1700V class

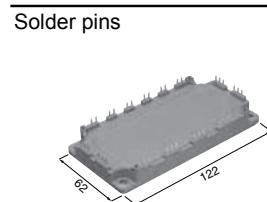

M633



Ic	1700V	
	V series	U series
100A		6MBI100U4B-170-50
150A		6MBI150U4B-170-50
100A	6MBI100VX-170-50	
	6MBI100VX-170-80	

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_c	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Cont.	typ.	typ.	typ.	I_c	typ.	t_{on}	t_{off}	t_f		
	Volts	Volts	Amps.	Watts	Volts	Amps.	μ sec.	μ sec.	μ sec.		Grams
6MBI100VX-170-50	1700	± 20	100	665	2.00	100	0.63	0.70	0.10	M648	310
6MBI100VX-170-80	1700	± 20	100	665	2.00	100	0.63	0.70	0.10	M648	310
6MBI100U4B-170-50	1700	± 20	100	520	2.25	100	0.62	0.55	0.09	M633	300
6MBI150U4B-170-50	1700	± 20	150	735	2.25	150	0.62	0.55	0.09	M633	300

Note1: EconoPACK™ is registered trademarks of Infineon Technologies AG, Germany.



Note2: "-80", "-85" : Pre-Applied Thermal-Interface-Material for "-50", "-55"

$V_{CE(sat)}$: at $T_{Vi}=25^{\circ}\text{C}$, Chip

IGBT Module 6-Pack < V series >

■ 6-Pack EconoPACK™+ 1200V, 1700V class

High power 6-pack

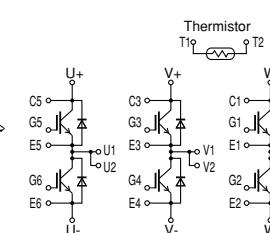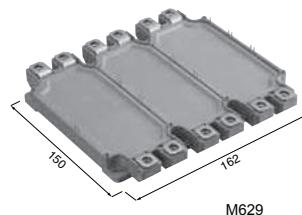

I_C	1200V	1700V
	V series	V series
225A	6MBI225V-120-50	
300A	6MBI300V-120-50 6MBI300V-120-80	6MBI300V-170-50
450A	6MBI450V-120-50 6MBI450V-170-80	6MBI450V-170-50 6MBI450V-170-80
550A	6MBI550V-120-50	

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)} (V_{GE}=15V)$ typ.	I_C Amps.	Switching time			Package	Net mass Grams
	Volts	Volts	Amps.	Watts			t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
6MBI225V-120-50	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M629	950
6MBI300V-120-50	1200	± 20	300	1600	1.75	300	0.55	1.05	0.11	M629	950
6MBI300V-120-80	1200	± 20	300	1600	1.75	300	0.55	1.05	0.11	M629	950
6MBI450V-120-50	1200	± 20	450	2250	1.75	450	0.55	1.05	0.11	M629	950
6MBI550V-120-50	1200	± 20	550	2500	1.85	600	0.55	1.05	0.11	M629	950
6MBI300V-170-50	1700	± 20	300	1665	2.00	300	0.90	1.30	0.10	M629	950
6MBI450V-170-50	1700	± 20	450	2500	2.00	450	0.90	1.30	0.10	M629	950
6MBI450V-170-80	1700	± 20	450	2500	2.00	450	0.90	1.30	0.10	M629	950

Note1: EconoPACK™ is registered trademarks of Infineon Technologies AG, Germany.




$V_{CE(sat)}$: at $T_{vj}=25^\circ\text{C}$, Chip

Note2: "-80" : Pre-Applied Thermal-Interface-Material



IGBT Module 2-Pack < X series / V series >

■ Standard 2-Pack 650V, 600V class

 M263	 M274	 M275	 M277		I_C	650V		600V	
						X series		V series	
100A									2MBI100VA-060-50
150A	2MBI150XAA065-50								2MBI150VA-060-50
200A	2MBI200XAA065-50								2MBI200VA-060-50
300A	2MBI300XBE065-50								2MBI300VB-060-50
400A	2MBI400XBE065-50								2MBI400VB-060-50
400A	2MBI400XDE065-50								2MBI400VD-060-50
600A	2MBI600XDE065-50								2MBI600VD-060-50
600A	2MBI600XEE065-50								2MBI600VE-060-50
									2MBI600VE-060-80

Dimension [mm]

■ X series

Device type	V_{CES}	V_{GES}	I_C Cont.	P_c Watts	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
					typ.	I_C	$t_{d(on)}$ typ. μ sec.	$t_{d(off)}$ typ. μ sec.	t_f typ. μ sec.		
● 2MBI150XAA065-50	650	± 20	150	435	1.30	150	0.39	0.38	0.11	M263	180
● 2MBI200XAA065-50	650	± 20	200	545	1.30	200	0.35	0.57	0.07	M263	180
● 2MBI300XBE065-50	650	± 20	300	1160	1.30	300	0.37	0.35	0.07	M274	240
● 2MBI400XBE065-50	650	± 20	400	1740	1.30	400	0.35	0.68	0.07	M274	240
● 2MBI400XDE065-50	650	± 20	400	1945	1.30	400	0.48	0.59	0.07	M275	370
● 2MBI600XDE065-50	650	± 20	600	2795	1.30	600	0.49	0.61	0.11	M275	370
● 2MBI600XEE065-50	650	± 20	600	2795	1.30	600	0.41	0.53	0.11	M277	470

■ V series

Device type	V_{CES}	V_{GES}	I_C Cont.	P_c Watts	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
					typ.	I_C	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
2MBI100VA-060-50	600	± 20	100	330	1.60	100	0.65	0.60	0.04	M263	180
2MBI150VA-060-50	600	± 20	150	480	1.60	150	0.65	0.60	0.04	M263	180
2MBI200VA-060-50	600	± 20	200	640	1.60	200	0.65	0.60	0.04	M263	180
2MBI300VB-060-50	600	± 20	300	1360	1.60	300	0.65	0.60	0.07	M274	240
2MBI400VB-060-50	600	± 20	400	1970	1.60	400	0.65	0.60	0.07	M274	240
2MBI400VD-060-50	600	± 20	400	1970	1.60	400	0.65	0.60	0.07	M275	370
2MBI600VD-060-50	600	± 20	600	2940	1.60	600	0.75	0.75	0.07	M275	370
2MBI600VE-060-50	600	± 20	600	2940	1.60	600	0.75	0.75	0.07	M277	470
2MBI600VE-060-80	600	± 20	600	2940	1.60	600	0.75	0.75	0.07	M277	470










Note : -80 : Pre-Applied Thermal-Interface-Material

 $V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^{\circ}\text{C}$, Chip

● : New products

IGBT Module 2-Pack < X series / V series >

■ Standard 2-Pack 1200V class

		I _C	1200V	
			X series	V series
		75A	2MBI75VA-120-50	
		100A	2MBI100XAA120-50	2MBI100VA-120-50
		150A	2MBI150XAA120-50	2MBI150VA-120-50
		200A	2MBI200XAA120-50	
		150A		2MBI150VB-120-50
		200A	2MBI200XBE120-50	2MBI200VB-120-50
		300A	2MBI300XBE120-50	
		300A		2MBI300VD-120-50
		400A	2MBI400XDE120-50	2MBI400VD-120-50
		600A	2MBI600XDE120-50	
		200A		2MBI200VH-120-50
				2MBI200VH-120-80
		300A	2MBI300XHA120-50	2MBI300VH-120-50
				2MBI300VH-120-80
		450A	2MBI450XHA120-50	2MBI450VH-120-50
				2MBI450VH-120-80
				2MBI450VH-120F-50
				2MBI450VH-120F-80
		600A	2MBI600XHA120-50	
		300A		2MBI300VE-120-50
				2MBI300VE-120-80
		450A	2MBI450XEE120-50	2MBI450VE-120-50
				2MBI450VE-120-80
		600A	2MBI600XEE120-50	2MBI600VE-120-50
				2MBI600VE-120-80

Dimension [mm]

■ X series

Device type	V _{CES}	V _{GES}	I _C Cont.	P _C Watts	V _{CE(sat)} (V _{GE} =15V) typ.	I _C Amps.	Switching time			Package	Net mass Grams
							t _{d(on)} typ. μ sec.	t _{d(off)} typ. μ sec.	t _f typ. μ sec.		
● 2MBI100XAA120-50	1200	±20	100	460	1.40	100	0.34	0.33	0.12	M263	180
● 2MBI150XAA120-50	1200	±20	150	575	1.50	150	0.25	0.32	0.16	M263	180
● 2MBI200XAA120-50	1200	±20	200	735	1.45	200	0.34	0.32	0.07	M263	180
● 2MBI200XBE120-50	1200	±20	200	1150	1.40	200	0.32	0.36	0.13	M274	240
● 2MBI300XBE120-50	1200	±20	300	1760	1.50	300	0.23	0.35	0.11	M274	240
● 2MBI400XDE120-50	1200	±20	400	2975	1.40	400	0.30	0.39	0.12	M275	370
● 2MBI600XDE120-50	1200	±20	600	3985	1.45	600	0.30	0.39	0.15	M275	370
● 2MBI300XHA120-50	1200	±20	300	1475	1.45	300	0.37	0.39	0.15	M276	370
● 2MBI450XHA120-50	1200	±20	450	1850	1.45	450	0.30	0.39	0.12	M276	370
● 2MBI600XHA120-50	1200	±20	600	2340	1.45	600	0.30	0.39	0.12	M276	370
● 2MBI450XEE120-50	1200	±20	450	2975	1.45	450	0.33	0.45	0.10	M277	470
● 2MBI600XEE120-50	1200	±20	600	3985	1.40	600	0.33	0.45	0.11	M277	470

● : New products

V_{CE(sat)}: at T_j=25°C, Chip



■ V series

Device type	V_{CES}	V_{GES}	I_c	P_c	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_c	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
2MBI75VA-120-50	1200	± 20	75	390	1.85	75	0.60	0.60	0.04	M263	180
2MBI100VA-120-50	1200	± 20	100	555	1.85	100	0.60	0.60	0.04	M263	180
2MBI150VA-120-50	1200	± 20	150	785	1.85	150	0.60	0.60	0.04	M263	180
2MBI150VB-120-50	1200	± 20	150	1070	1.85	150	0.60	0.80	0.08	M274	240
2MBI200VB-120-50	1200	± 20	200	1500	1.75	200	0.60	0.80	0.08	M274	240
2MBI300VD-120-50	1200	± 20	300	2200	1.85	300	0.60	0.80	0.08	M275	380
2MBI400VD-120-50	1200	± 20	400	3330	1.75	400	0.60	0.80	0.08	M275	380
2MBI200VH-120-50	1200	± 20	200	1110	1.75	200	0.60	0.80	0.08	M276	370
2MBI200VH-120-80	1200	± 20	200	1110	1.75	200	0.60	0.80	0.08	M276	370
2MBI300VH-120-50	1200	± 20	300	1600	1.75	300	0.60	0.80	0.08	M276	370
2MBI300VH-120-80	1200	± 20	300	1600	1.75	300	0.60	0.80	0.08	M276	370
2MBI450VH-120-50	1200	± 20	450	2400	1.80	450	0.60	0.80	0.08	M276	370
2MBI450VH-120-80	1200	± 20	450	2400	1.80	450	0.60	0.80	0.08	M276	370
2MBI450VH-120F-50	1200	± 20	450	2400	1.80	450	0.60	0.80	0.08	M276	370
2MBI450VH-120F-80	1200	± 20	450	2400	1.80	450	0.60	0.80	0.08	M276	370
2MBI300VE-120-50	1200	± 20	300	2200	1.85	300	0.60	0.80	0.08	M277	470
2MBI300VE-120-80	1200	± 20	300	2200	1.85	300	0.60	0.80	0.08	M277	470
2MBI450VE-120-50	1200	± 20	450	3350	1.80	450	0.60	0.80	0.08	M277	470
2MBI450VE-120-80	1200	± 20	450	3350	1.80	450	0.60	0.80	0.08	M277	470
2MBI600VE-120-50	1200	± 20	600	4800	1.75	600	0.60	0.80	0.08	M277	470
2MBI600VE-120-80	1200	± 20	600	4800	1.75	600	0.60	0.80	0.08	M277	470

Note : -80 : Pre-Applied Thermal-Interface-Material

 $V_{CE(sat)}$: at $T_{vj}=25^{\circ}\text{C}$, Chip

IGBT Module 2-Pack < X series / V series >

■ Standard 2-Pack 1700V class

I_C	1700V	
	X series	V series
75A	2MBI75XAA170-50	2MBI75VA-170-50
100A	2MBI100XAA170-50	2MBI100VA-170-50
150A	2MBI150XAA170-50	
200A		
150A	2MBI150XHA170-50	2MBI150VH-170-50
200A	2MBI200XHA170-50	2MBI200VH-170-50
300A	2MBI300XHA170-50	2MBI300VH-170-50
400A	2MBI400XHA170-50	
300A	2MBI300XEE170-50	2MBI300VE-170-50
400A	2MBI400XEE170-50	2MBI400VE-170-50
		2MBI300VE-170-80
		2MBI400VE-170-80

Dimension [mm]

■ X series

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_C	$t_{d(on)}$ typ. μ sec.	$t_{d(off)}$ typ. μ sec.	t_f typ. μ sec.		
○ 2MBI75XAA170-50	1700	± 20	75	TBD	TBD	75	TBD	TBD	TBD	M263	180
○ 2MBI100XAA170-50	1700	± 20	100	TBD	TBD	100	TBD	TBD	TBD	M263	180
○ 2MBI150XAA170-50	1700	± 20	150	TBD	TBD	150	TBD	TBD	TBD	M263	180
○ 2MBI150XHA170-50	1700	± 20	150	TBD	TBD	150	TBD	TBD	TBD	M276	370
○ 2MBI200XHA170-50	1700	± 20	200	TBD	TBD	200	TBD	TBD	TBD	M276	370
○ 2MBI300XHA170-50	1700	± 20	300	TBD	TBD	300	TBD	TBD	TBD	M276	370
○ 2MBI400XHA170-50	1700	± 20	400	TBD	TBD	400	TBD	TBD	TBD	M276	370
○ 2MBI300XEE170-50	1700	± 20	300	TBD	TBD	300	TBD	TBD	TBD	M277	470
○ 2MBI400XEE170-50	1700	± 20	400	TBD	TBD	400	TBD	TBD	TBD	M277	470

■ V series

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_C	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
2MBI75VA-170-50	1700	± 20	75	555	2.00	75	1.25	1.30	0.15	M263	180
2MBI100VA-170-50	1700	± 20	100	665	2.00	100	1.25	1.30	0.15	M263	180
2MBI150VH-170-50	1700	± 20	150	1110	2.00	150	0.95	1.05	0.14	M276	370
2MBI150VH-170-80	1700	± 20	150	1110	2.00	150	0.95	1.05	0.14	M276	370
2MBI200VH-170-50	1700	± 20	200	1250	2.00	200	1.15	1.05	0.14	M276	370
2MBI200VH-170-80	1700	± 20	200	1250	2.00	200	1.15	1.05	0.14	M276	370
2MBI300VH-170-50	1700	± 20	300	1805	2.00	300	1.15	1.05	0.14	M276	370
2MBI300VH-170-80	1700	± 20	300	1805	2.00	300	1.15	1.05	0.14	M276	370
2MBI300VE-170-50	1700	± 20	300	2830	2.00	300	1.15	1.05	0.14	M277	470
2MBI300VE-170-80	1700	± 20	300	2830	2.00	300	1.15	1.05	0.14	M277	470
2MBI400VE-170-50	1700	± 20	400	3840	2.00	400	1.15	1.05	0.14	M277	470
2MBI400VE-170-80	1700	± 20	400	3840	2.00	400	1.15	1.05	0.14	M277	470

Note : -80 : Pre-Applied Thermal-Interface-Material

○ : Under development



 $V_{CE(sat)}$, V_{FM} : at $T_j=25^\circ C$, Chip





IGBT Module 2-Pack < X series / V series >

■ Standard 2-Pack 1200V class



Solder pins

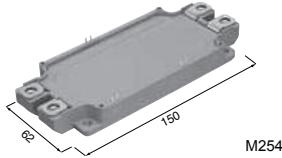



Solder pins

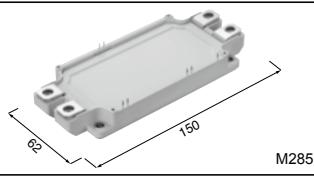



Press fit pins

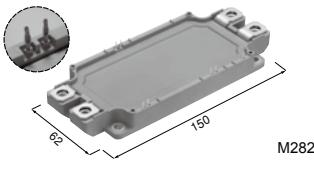

Press fit pins

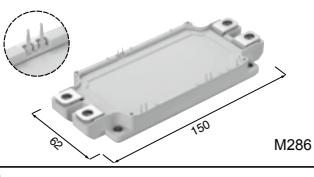

Spring contacts

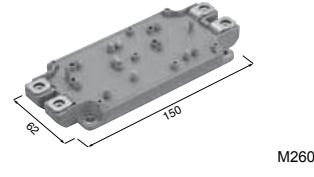

Dimension [mm]

■ X series

Device type	V_{CES} Volts	V_{GES} Volts	I_c Cont. Amps.	P_c Watts	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass Grams
					typ. Volts	typ. Amps.	$t_{d(on)}$ typ. μ sec.	$t_{d(off)}$ typ. μ sec.	t_f typ. μ sec.		
○ 2MBI225XNA120-50	1200	± 20	225	1030	1.45	225	0.23	0.33	0.05	M254	350
○ 2MBI300XNA120-50	1200	± 20	300	1325	1.40	300	0.26	0.36	0.05	M254	350
○ 2MBI450XNA120-50	1200	± 20	450	1760	1.40	450	0.37	0.40	0.07	M254	350
○ 2MBI600XNG120-50*	1200	± 20	600	3125	1.45	600	0.42	0.42	0.07	M254	350
● 2MBI600XNE120-50*	1200	± 20	600	3125	1.45	600	0.42	0.42	0.07	M285*	350
● 2MBI800XNE120-50*	1200	± 20	800	4050	1.45	800	0.47	0.45	0.08	M285*	350
○ 2MBI225XNB120-50	1200	± 20	225	1030	1.45	225	0.23	0.33	0.05	M282	350
○ 2MBI300XNB120-50	1200	± 20	300	1325	1.40	300	0.26	0.36	0.05	M282	350
○ 2MBI450XNB120-50	1200	± 20	450	1760	1.40	450	0.37	0.40	0.07	M282	350
○ 2MBI600XNH120-50*	1200	± 20	600	3125	1.45	600	0.42	0.42	0.07	M282	350
○ 2MBI600XNF120-50*	1200	± 20	600	3125	1.45	600	0.42	0.42	0.07	M286*	350
○ 2MBI800XNF120-50*	1200	± 20	800	4050	1.45	800	0.47	0.45	0.08	M286*	350

*1: The products with 'XNE, XNF, XNG, XNH' : Low Thermal Impedance Version

 $V_{CE(sat)}$: at $T_{vj}=25^{\circ}\text{C}$, Chip

*2: Low thermal impedance and high tracking capability type

*3: The products with 'S' : Low Thermal Impedance Version

●: New products ○: Under development

■ V series

Device type	V_{CES}	V_{GES}	I_c	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_c	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
											Grams
2MBI225VN-120-50	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M254	350
2MBI225VN-120-80	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M254	350
2MBI225VN-120S-50* ³	1200	± 20	225	1360	1.85	225	0.40	0.55	0.05	M254	350
2MBI300VN-120-50	1200	± 20	300	1595	1.75	300	0.55	1.05	0.11	M254	350
2MBI300VN-120-80	1200	± 20	300	1595	1.75	300	0.55	1.05	0.11	M254	350
2MBI300VN-120S-50* ³	1200	± 20	300	2000	1.75	300	0.45	0.65	0.06	M254	350
2MBI300VN-120S-80* ³	1200	± 20	300	2000	1.75	300	0.45	0.65	0.06	M254	350
2MBI450VN-120-50	1200	± 20	450	2270	1.75	450	0.55	1.05	0.11	M254	350
2MBI450VN-120-80	1200	± 20	450	2270	1.75	450	0.55	1.05	0.11	M254	350
2MBI450VN-120S-50* ³	1200	± 20	450	3000	1.75	450	0.47	0.70	0.07	M254	350
2MBI450VN-120S-80* ³	1200	± 20	450	3000	1.75	450	0.47	0.70	0.07	M254	350
2MBI600VN-120-50	1200	± 20	600	3750	1.85	600	0.55	1.05	0.11	M254	350
2MBI600VN-120-80	1200	± 20	600	3750	1.85	600	0.55	1.05	0.11	M254	350
2MBI225VX-120-50	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M282	350
2MBI225VX-120-80	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M282	350
2MBI300VX-120-50	1200	± 20	300	1595	1.75	300	0.55	1.05	0.11	M282	350
2MBI300VX-120-80	1200	± 20	300	1595	1.75	300	0.55	1.05	0.11	M282	350
2MBI450VX-120-50	1200	± 20	450	2270	1.75	450	0.55	1.05	0.11	M282	350
2MBI450VX-120-80	1200	± 20	450	1595	1.75	450	0.55	1.05	0.11	M282	350
2MBI600VX-120-50	1200	± 20	600	3750	1.85	600	0.55	1.05	0.11	M282	350
2MBI600VX-120-80	1200	± 20	600	3750	1.85	600	0.55	1.05	0.11	M282	350
2MBI225VJ-120-50	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M260	360
2MBI225VJ-120-80	1200	± 20	225	1070	1.85	225	0.55	1.05	0.11	M260	360
2MBI300VJ-120-50	1200	± 20	300	1595	1.75	300	0.55	1.05	0.11	M260	360
2MBI300VJ-120-80	1200	± 20	300	1595	1.75	300	0.55	1.05	0.11	M260	360
2MBI450VJ-120-50	1200	± 20	450	2270	1.75	450	0.55	1.05	0.11	M260	360
2MBI450VJ-120-80	1200	± 20	450	2270	1.75	450	0.55	1.05	0.11	M260	360
2MBI600VJ-120-50	1200	± 20	600	3750	1.85	600	0.55	1.05	0.11	M260	360
2MBI600VJ-120-80	1200	± 20	600	3750	1.85	600	0.55	1.05	0.11	M260	360

*1: The products with 'XNE, XNF, XNG, XNH' : Low Thermal Impedance Version

 $V_{CE(sat)}$: at $T_{vj}=25^{\circ}\text{C}$, Chip

*2: Low thermal impedance and high tracking capability type

*3: The products with 'S' : Low Thermal Impedance Version



Note: -80 : Pre-Applied Thermal-Interface-Material



IGBT Module 2-Pack < X series / V series >



■ Standard 2-Pack 1700V class

Solder pins

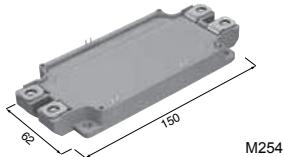



I_C	1700V		
	X series	V series	V series With SIN-substrate
225A	2MBI225XNA170-50		
300A	2MBI300XNA170-50	2MBI300VN-170-50	2MBI300VN-170-80
450A	2MBI450XNA170-50	2MBI450VN-170-50	2MBI450VN-170-80
550A			2MBI550VN-170-50 2MBI550VN-170-80
600A	2MBI600XNG170-50		
600A	2MBI600XNE170-50		

Solder pins

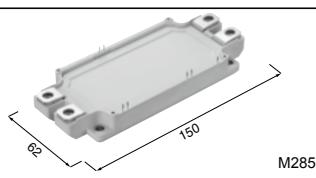

225A	2MBI225XNB170-50	2MBI225VX-170-50	
		2MBI225VX-170-80	
300A	2MBI300XNB170-50	2MBI300VX-170-50	2MBI300VX-170-80
450A	2MBI450XNB170-50	2MBI450VX-170-50	2MBI450VX-170-80
550A			2MBI550VX-170-50 2MBI550VX-170-80
600A	2MBI600XNH170-50		
600A	2MBI600XNF170-50		

Press fit pins

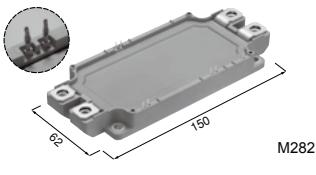

225A	2MBI225XNB170-50	2MBI225VX-170-50	
		2MBI225VX-170-80	
300A	2MBI300XNB170-50	2MBI300VX-170-50	2MBI300VX-170-80
450A	2MBI450XNB170-50	2MBI450VX-170-50	2MBI450VX-170-80
550A			2MBI550VX-170-50 2MBI550VX-170-80
600A	2MBI600XNH170-50		
600A	2MBI600XNF170-50		

Press fit pins

550A			2MBI550VJ-170-50 2MBI550VJ-170-80

Spring contacts

550A			2MBI550VJ-170-50 2MBI550VJ-170-80

Dimension [mm]

■ X series

Device type	V_{CES}	V_{GES}	I_C Cont.	P_C Watts	$V_{CE(sat)}$ ($V_{GE}=15V$) typ.	I_C	Switching time			Package	Net mass	
							Volts	Volts	Amps.	Watts		
○ 2MBI225XNA170-50	1700	± 20	225	TBD	TBD	225	TBD	TBD	TBD	TBD	M254	350
○ 2MBI300XNA170-50	1700	± 20	300	TBD	TBD	300	TBD	TBD	TBD	TBD	M254	350
○ 2MBI450XNA170-50	1700	± 20	450	TBD	TBD	450	TBD	TBD	TBD	TBD	M254	350
○ 2MBI600XNG170-50*	1700	± 20	450	TBD	TBD	450	TBD	TBD	TBD	TBD	M254	350
○ 2MBI600XNE170-50*	1700	± 20	600	TBD	TBD	600	TBD	TBD	TBD	TBD	M285* ²	350
○ 2MBI225XNB170-50	1700	± 20	225	TBD	TBD	225	TBD	TBD	TBD	TBD	M282	350
○ 2MBI300XNB170-50	1700	± 20	300	TBD	TBD	300	TBD	TBD	TBD	TBD	M282	350
○ 2MBI450XNB170-50	1700	± 20	450	TBD	TBD	450	TBD	TBD	TBD	TBD	M282	350
○ 2MBI600XNH170-50*	1700	± 20	450	TBD	TBD	450	TBD	TBD	TBD	TBD	M282	350
○ 2MBI600XNF170-50*	1700	± 20	600	TBD	TBD	600	TBD	TBD	TBD	TBD	M286* ²	350

*1: The products with 'XNE, XNF, XNG, XNH' : Low Thermal Impedance Version

 $V_{CE(sat)}$: at $T_{vj}=25^\circ C$, Chip

*2: Low thermal impedance and high tracking capability type

*3: 550A Low Thermal Impedance Version

○: Under development

■ V series

Device type	V_{CES}	V_{GES}	I_c	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_c	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
					Volts	Amps.					Grams
2MBI300VN-170-50	1700	± 20	300	1665	2.00	300	0.90	1.30	0.10	M254	350
2MBI300VN-170-80	1700	± 20	300	1665	2.00	300	0.90	1.30	0.10	M254	350
2MBI450VN-170-50	1700	± 20	450	2500	2.00	450	0.90	1.30	0.10	M254	350
2MBI450VN-170-80	1700	± 20	450	2500	2.00	450	0.90	1.30	0.10	M254	350
2MBI550VN-170-50*³	1700	± 20	550	3750	2.15	550	1.00	1.30	0.10	M254	350
2MBI550VN-170-80*³	1700	± 20	550	3750	2.15	550	1.00	1.30	0.10	M254	350
2MBI225VX-170-50	1700	± 20	225	1500	2.00	225	0.90	1.05	0.08	M282	350
2MBI225VX-170-80	1700	± 20	225	1500	2.00	225	0.90	1.05	0.08	M282	350
2MBI300VX-170-50	1700	± 20	300	1665	2.00	300	0.90	1.30	0.10	M282	350
2MBI300VX-170-80	1700	± 20	300	1665	2.00	300	0.90	1.30	0.10	M282	350
2MBI450VX-170-50	1700	± 20	450	2500	2.00	450	0.90	1.30	0.10	M282	350
2MBI450VX-170-80	1700	± 20	450	2500	2.00	450	0.90	1.30	0.10	M282	350
2MBI550VX-170-50*³	1700	± 20	550	3750	2.15	550	1.00	1.30	0.10	M282	350
2MBI550VX-170-80*³	1700	± 20	550	3750	2.15	550	1.00	1.30	0.10	M282	350
2MBI550VJ-170-50*³	1700	± 20	550	3750	2.15	550	1.00	1.30	0.10	M260	360
2MBI550VJ-170-80*³	1700	± 20	550	3750	2.15	550	1.00	1.30	0.10	M260	360

*1: The products with 'S' : Low Thermal Impedance Version

*2: Low thermal impedance and high tracking capability type





*3: 550A Low Thermal Impedance Version

Note: -80 : Pre-Applied Thermal-Interface-Material

 $V_{CE(sat)}$: at $T_{vj}=25^{\circ}\text{C}$, Chip

IGBT Module 2-Pack < X series >

■ High Power Module HPnC 1700V, 3300V class



Dimension [mm]

Device type	V_{CES}	V_{GES}	I_c	P_C	$V_{CE(sat)}$ (V _{GE} =15V)	Switching time			Package	Net mass	
	Volts	Volts	Amps.	Watts	typ.	I_c	$t_{d(on)}$ typ.	$t_{d(off)}$ typ.	t_f typ.		
						μ sec.	μ sec.	μ sec.		Grams	
○ 2MBI1000XUF170-50	1700	±20	1000	4340	1.7	1000	0.75	1.3	0.6	M288	670
○ 2MBI1000XVF170-50	1700	±20	1000	4340	1.7	1000	0.75	1.3	0.6	M292	720
○ 2MBI450XUF330-50	3300	±20	450	TBD	TBD	450	TBD	TBD	TBD	M288	670
○ 2MBI450XVF330-50	3300	±20	450	TBD	TBD	450	TBD	TBD	TBD	M292	720

○ : Under development



Note: M288 and M292 are different in the dimensions of the output terminal.

$V_{CE(sat)}$, V_{FM} : at $T_{vj}=25^\circ\text{C}$, Chip

IGBT Module 2-Pack < V series >

■ High Power Module 1200V, 1700V class

I_C	1200V		1700V	
	V series		V series	
	Cu-baseplate		Cu-baseplate	AlSiC-baseplate
	600A	2MBI600VG-120P	2MBI600VG-170E	2MBI600VT-170E
800A	2MBI800VG-120P		2MBI800VG-170E	2MBI800VT-170E
1200A	2MBI1200VG-120P		2MBI1200VG-170E	2MBI1200VT-170E



M256, M278

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_C	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.		
2MBI600VG-120P	1200	± 20	600	3940	1.70	600	1.86	1.25	0.12	M256	1500
2MBI800VG-120P	1200	± 20	800	5170	1.70	800	1.97	1.33	0.15	M256	1500
2MBI1200VG-120P	1200	± 20	1200	6810	1.70	1200	2.55	1.67	0.16	M256	1500
2MBI600VG-170E	1700	± 20	600	4410	2.00	600	2.28	2.07	0.58	M256	1500
2MBI800VG-170E	1700	± 20	800	5760	2.00	800	2.41	2.13	0.55	M256	1500
2MBI1200VG-170E	1700	± 20	1200	7500	2.00	1200	2.76	2.29	0.33	M256	1500
2MBI600VT-170E	1700	± 20	600	4280	2.00	600	1.51	2.07	0.58	M278	900
2MBI800VT-170E	1700	± 20	800	5370	2.00	800	2.00	2.13	0.55	M278	900
2MBI1200VT-170E	1700	± 20	1200	7040	2.00	1200	2.14	2.29	0.33	M278	900

Note: M256: Cu-baseplate M278: AlSiC-baseplate

$V_{CE(sat)}$: at $T_{vj}=25^\circ\text{C}$, Chip Switching time: at $T_{vj}=125^\circ\text{C}$



IGBT Module 2-Pack < X series / V series >

■ PrimePACK™ 1200V class

I _c	1200V			
	X series		V series	
	Low switching loss	Soft turn off	Low switching loss	Soft turn off
600A			2MBI600VXA-120E-50	
			2MBI600VXA-120E-80	
			2MBI600VXA-120E-54	
900A	2MBI900XXA120E-50	2MBI900XXA120P-50	2MBI900VXA-120E-50	2MBI900VXA-120P-50
			2MBI900VXA-120E-80	2MBI900VXA-120P-80
			2MBI900VXA-120E-54	2MBI900VXA-120P-54
1200A	2MBI1200XXE120E-50	2MBI1200XXE120P-50		
1400A		2MBI1400XXB120P-50	2MBI1400VXB-120E-50	2MBI1400VXB-120P-50
			2MBI1400VXB-120E-80	2MBI1400VXB-120P-80
			2MBI1400VXB-120E-54	2MBI1400VXB-120P-54
1800A		2MBI1800XXF120P-50		

Dimension [mm]

■ X series

Device type	V _{CES}	V _{GES}	I _c	P _c Cont.	V _{CE(sat)} (V _{GE} =15V)		Switching time			Package	Net mass
					typ.	I _c	t _{d(on)} typ. μ sec.	t _{d(off)} typ. μ sec.	t _f typ. μ sec.		
	Volts	Volts	Amps.	Watts	Volts	Amps.					Grams
○ 2MBI900XXA120E-50	1200	±20	900	TBD	TBD	900	TBD	TBD	TBD	M271	850
○ 2MBI900XXA120P-50	1200	±20	900	TBD	TBD	900	TBD	TBD	TBD	M271	850
○ 2MBI1200XXE120E-50	1200	±20	1200	TBD	TBD	1200	TBD	TBD	TBD	M271	850
○ 2MBI1200XXE120P-50	1200	±20	1200	TBD	TBD	1200	TBD	TBD	TBD	M271	850
○ 2MBI1400XXB120P-50	1200	±20	1400	TBD	TBD	1400	TBD	TBD	TBD	M272	1250
○ 2MBI1800XXF120P-50	1200	±20	1800	TBD	TBD	1800	TBD	TBD	TBD	M272	1250

■ V series

Device type	V _{CES}	V _{GES}	I _c	P _c Cont.	V _{CE(sat)} (V _{GE} =15V)		Switching time			Package	Net mass
					typ.	I _c	t _{on} typ. μ sec.	t _{off} typ. μ sec.	t _f typ. μ sec.		
	Volts	Volts	Amps.	Watts	Volts	Amps.					Grams
2MBI600VXA-120E-50	1200	±20	600	3350	1.75	600	1.00	1.20	0.15	M271	850
2MBI600VXA-120E-80	1200	±20	600	3350	1.75	600	1.00	1.20	0.15	M271	850
2MBI600VXA-120E-54	1200	±20	600	3350	1.75	600	1.00	1.20	0.15	M271	850
2MBI900VXA-120E-50	1200	±20	900	5100	1.75	900	1.00	1.20	0.15	M271	850
2MBI900VXA-120E-80	1200	±20	900	5100	1.75	900	1.00	1.20	0.15	M271	850
2MBI900VXA-120E-54	1200	±20	900	5100	1.75	900	1.00	1.20	0.15	M271	850
2MBI1400VXB-120E-50	1200	±20	1400	7650	1.75	1400	1.00	1.20	0.15	M272	1250
2MBI1400VXB-120E-80	1200	±20	1400	7650	1.75	1400	1.00	1.20	0.15	M272	1250
2MBI1400VXB-120E-54	1200	±20	1400	7650	1.75	1400	1.00	1.20	0.15	M272	1250
2MBI900VXA-120P-50	1200	±20	900	5100	1.65	900	1.00	1.20	0.15	M271	850
2MBI900VXA-120P-80	1200	±20	900	5100	1.65	900	1.00	1.20	0.15	M271	850
2MBI900VXA-120P-54	1200	±20	900	5100	1.65	900	1.00	1.20	0.15	M271	850
2MBI1400VXB-120P-50	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250
2MBI1400VXB-120P-80	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250
2MBI1400VXB-120P-54	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250

Note 1: PrimePACK™ is registered trademark of Infineon Technologies AG, Germany.

Note 2: The products with suffix "-54" on this page are labeled to specify the rank of V_{CE(sat)} and V_F.

Note 3: "-80": Pre-Applied Thermal-Interface-Material for "-54"

○ : Under development

V_{CE(sat)}: at T_J=25°C, Chip

IGBT Module 2-Pack < X series / V series >

■ PrimePACK™ 1700V class

I _C	1700V		
	X series		V series
	Low switching loss	Low switching loss	Soft turn off
650A	2MBI650XXA170-50		2MBI650VXA-170E-50
	2MBI650VXA-170E-80		
	2MBI650VXA-170E-54		
	2MBI650VXA-170EA-50		
	2MBI650VXA-170EA-80		
	2MBI650VXA-170EA-54		
1200A	2MBI1200XXE170-50		
1000A	2MBI1000XXB170-50		2MBI1000VXB-170E-50
	2MBI1000VXB-170E-80		
	2MBI1000VXB-170E-54		
	2MBI1000VXB-170EA-50		
	2MBI1000VXB-170EA-80		
	2MBI1000VXB-170EA-54		
1400A	2MBI1400XXB170-50		2MBI1400VXB-170E-50
	2MBI1400VXB-170E-80		2MBI1400VXB-170P-80
	2MBI1400VXB-170E-54		2MBI1400VXB-170P-54
	2MBI1800XXF170-50		

Dimension [mm]

■ X series

Device type	V _{CES}	V _{GES}	I _C	P _C	V _{CE(sat)} (V _{GE} =15V)		Switching time			Package	Net mass	
					typ.	I _C	t _{d(on)}	typ.	μ sec.	typ.	μ sec.	
	Volts	Volts	Amps.	Watts	Volts	Amps.	typ.	μ sec.	typ.	μ sec.	typ.	Grams
○ 2MBI650XXA170-50	1700	±20	650	TBD	TBD	650	TBD	TBD	TBD	TBD	M271	850
○ 2MBI1200XXE170-50	1700	±20	1200	TBD	TBD	1200	TBD	TBD	TBD	TBD	M271	850
○ 2MBI1000XXB170-50	1700	±20	1000	TBD	TBD	1000	TBD	TBD	TBD	TBD	M272	1250
○ 2MBI1400XXB170-50	1700	±20	1400	TBD	TBD	1400	TBD	TBD	TBD	TBD	M272	1250
○ 2MBI1800XXF170-50	1700	±20	1800	TBD	TBD	1800	TBD	TBD	TBD	TBD	M272	1250

■ V series

Device type	V _{CES}	V _{GES}	I _C	P _C	V _{CE(sat)} (V _{GE} =15V)		Switching time			Package	Net mass		
					typ.	I _C	t _{on}	typ.	μ sec.	t _{off}	typ.	μ sec.	
	Volts	Volts	Amps.	Watts	Volts	Amps.	typ.	μ sec.	typ.	μ sec.	typ.	μ sec.	Grams
2MBI650VXA-170E-50	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	TBD	M271	850	
2MBI650VXA-170E-80	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	TBD	M271	850	
2MBI650VXA-170E-54	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	TBD	M271	850	
2MBI650VXA-170EA-50	1700	±20	650	4150	2.00	650	1.70	1.60	0.11	TBD	M271	850	
2MBI650VXA-170EA-80	1700	±20	650	4150	2.00	650	1.70	1.60	0.11	TBD	M271	850	
2MBI650VXA-170EA-54	1700	±20	650	4150	2.00	650	1.70	1.60	0.11	TBD	M271	850	
2MBI1000VXB-170E-50	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	TBD	M272	1250	
2MBI1000VXB-170E-80	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	TBD	M272	1250	
2MBI1000VXB-170E-54	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	TBD	M272	1250	
2MBI1000VXB-170EA-50	1700	±20	1000	6250	2.00	1000	1.70	1.60	0.11	TBD	M272	1250	
2MBI1000VXB-170EA-80	1700	±20	1000	6250	2.00	1000	1.70	1.60	0.11	TBD	M272	1250	
2MBI1000VXB-170EA-54	1700	±20	1000	6250	2.00	1000	1.70	1.60	0.11	TBD	M272	1250	
2MBI1400VXB-170E-50	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	TBD	M272	1250	
2MBI1400VXB-170E-80	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	TBD	M272	1250	
2MBI1400VXB-170E-54	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	TBD	M272	1250	
2MBI1400VXB-170P-50	1700	±20	1400	8820	1.90	1400	1.35	1.80	0.20	TBD	M272	1250	
2MBI1400VXB-170P-80	1700	±20	1400	8820	1.90	1400	1.35	1.80	0.20	TBD	M272	1250	
2MBI1400VXB-170P-54	1700	±20	1400	8820	1.90	1400	1.35	1.80	0.20	TBD	M272	1250	

Note 1: PrimePACK™ is registered trademark of Infineon Technologies AG, Germany.

Note 2: The products with suffix '-54' on this page are labeled to specify the rank of V_{CE(sat)} and V_F.

Note 3: The products with 'EA' on this page have optimized FWD for the application causing heavy load through FWD.

The optimized FWD reduces V_F and thermal resistance.

Note 4: "-80": Pre-Applied Thermal-Interface-Material for "-54"

○ : Under development

V_{CE(sat)}: at T_J=25°C, Chip



IGBT Module 1-Pack < V series >

■ Standard 1-Pack 1200V, 1700V class

I_C	1200V		1700V
	V series		V series
	Aluminium oxide DCB	Aluminium nitride DCB	Aluminium oxide DCB
	300A		1MBI300V-170-50
400A	1MBI400V-120-50		1MBI400VF-120-50
600A	1MBI600V-120-50		1MBI600VF-120-50
900A	1MBI900V-120-50		

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)} (V_{GE}=15V)$ typ.	I_C	Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts			Volts	Amps.	t_{on} typ. μ sec.	t_{off} typ. μ sec.	
1MBI400V-120-50	1200	± 20	400	2410	1.75	400	0.60	1.10	0.14	M153	380
1MBI600V-120-50	1200	± 20	600	3000	1.75	600	0.70	0.90	0.10	M153	380
1MBI900V-120-50	1200	± 20	900	4280	1.90	900	0.70	0.85	0.10	M153	380
1MBI400VF-120-50	1200	± 20	400	3330	1.75	400	0.60	1.10	0.14	M153	380
1MBI600VF-120-50	1200	± 20	600	4680	1.75	600	0.70	0.90	0.10	M153	380
1MBI300V-170-50	1700	± 20	300	1705	2.00	300	0.70	0.80	0.14	M153	380
1MBI400V-170-50	1700	± 20	400	2500	2.00	400	0.70	0.80	0.14	M153	380
1MBI600V-170-50	1700	± 20	600	3610	2.00	600	0.70	0.80	0.14	M153	380

 $V_{CE(sat)}$: at $T_{vj}=25^\circ\text{C}$, Chip

IGBT Module 1-Pack < V series / U series >

■ High Power Module 1200V, 1700V, 3300V class

I_C	1200V		1700V		3300V
	V series		V series		U series
	Cu-baseplate	AISiC-baseplate	Cu-baseplate	AISiC-baseplate	AISiC-baseplate
800A					1MBI800UG-330
1000A					1MBI1000UG-330
					1MBI1000UG-330B
1200A	1MBI1200VC-120P	1MBI1200VC-170E	1MBI1200VR-170E		
1600A	1MBI1600VC-120P	1MBI1600VC-170E	1MBI1600VR-170E		
2400A	1MBI2400VC-120P	1MBI2400VC-170E	1MBI2400VR-170E		
1200A					1MBI1200UE-330
1500A					1MBI1500UE-330
					1MBI1500UE-330B
2400A	1MBI2400VD-120P	1MBI2400VD-170E	1MBI2400VS-170E		
3600A	1MBI3600VD-120P	1MBI3600VD-170E	1MBI3600VS-170E		

Dimension [mm]									
Device type	V_{CES} Volts	V_{GES} Volts	I_C Cont. Amps.	P_C Watts	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.
					typ.	I_C Amps.			
1MBI1200VC-120P	1200	± 20	1200	7890	1.70	1200	1.73	1.52	0.15
1MBI1600VC-120P	1200	± 20	1600	10340	1.70	1600	2.22	1.47	0.19
1MBI2400VC-120P	1200	± 20	2400	13630	1.70	2400	3.15	1.93	0.24
1MBI2400VD-120P	1200	± 20	2400	15780	1.70	2400	2.38	1.64	0.21
1MBI3600VD-120P	1200	± 20	3600	20540	1.70	3600	2.98	2.15	0.27
1MBI1200VC-170E	1700	± 20	1200	8820	2.00	1200	2.18	2.20	0.45
1MBI1600VC-170E	1700	± 20	1600	11700	2.00	1600	2.28	2.17	0.40
1MBI2400VC-170E	1700	± 20	2400	15000	2.00	2400	2.63	2.41	0.38
1MBI2400VD-170E	1700	± 20	2400	17640	2.00	2400	2.30	2.22	0.43
1MBI3600VD-170E	1700	± 20	3600	22380	2.00	3600	2.27	2.67	0.31
1MBI1200VR-170E	1700	± 20	1200	8570	2.00	1200	1.51	2.20	0.45
1MBI1600VR-170E	1700	± 20	1600	10710	2.00	1600	1.83	2.17	0.40
1MBI2400VR-170E	1700	± 20	2400	14010	2.00	2400	2.51	2.41	0.38
1MBI2400VS-170E	1700	± 20	2400	16120	2.00	2400	2.09	2.22	0.43
1MBI3600VS-170E	1700	± 20	3600	21120	2.00	3600	2.70	2.66	0.32
1MBI800UG-330	3300	± 20	800	9600	2.28	800	3.40	2.40	0.40
1MBI1000UG-330	3300	± 20	1000	10400	2.46	1000	2.50	2.00	0.50
1MBI1000UG-330B	3300	± 20	1000	10400	2.75	1000	3.10	2.35	0.45
1MBI1200UE-330	3300	± 20	1200	14700	2.28	1200	3.40	2.40	0.40
1MBI1500UE-330	3300	± 20	1500	15600	2.46	1500	3.10	2.60	0.50
1MBI1500UE-330B	3300	± 20	1500	15600	2.75	1500	3.10	2.35	0.45

Note1: M151, M152: Cu-baseplate M155, M156: AISiC-baseplate

$V_{CE(sat)}$: at $T_{vj}=25^\circ\text{C}$, Chip

Switching time: at $T_{vj}=125^\circ\text{C}$, at $T_{vj}=150^\circ\text{C}$ (3300V-1000A, 1500A only)


Note2: -330B type: Low switching losses




IGBT Module Chopper < V series / U series >

■ Chopper 600V, 1200V class


I_C	600V		1200V	
	U series	V series	U series	V series
50A			1MBI50U4F-120L-50	
75A			1MBI75U4F-120L-50	
100A			1MBI100U4F-120L-50	
150A				1MBI150VA-120L-50
200A				1MBI200VA-120L-50
200A			1MBI200U4H-120L-50	
300A	1MBI300U2H-060L-50			
400A		1MBI400VH-060L-50		



M262



M259



M283

Dimension Diagram:

```

    graph LR
        C1((C1)) --> FWD[FWD]
        FWD --> NC[NC]
        NC --> E1[E1]
        E1 --> E1C2[E1C2]
        E1C2 --> G1[G1]
        G1 --> InverseDiode[Inverse Diode]
        InverseDiode --> G2[G2]
        G2 --> E2[E2]
    
```




Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass	
					Cont.	typ.	I_C	t_{on} typ. $\mu sec.$	t_{off} typ. $\mu sec.$	t_f typ. $\mu sec.$		
	Volts	Volts	Amps.	Watts	Volts	Amps.					Grams	
1MBI300U2H-060L-50	600	± 20	300	1000	2.45	300		0.40	0.48	0.07	M259	360
1MBI400VH-060L-50	600	± 20	400	1250	1.60	400		0.73	0.61	0.07	M283	370
1MBI50U4F-120L-50	1200	± 20	50	400	2.15	50		0.32	0.41	0.07	M262	180
1MBI75U4F-120L-50	1200	± 20	75	400	2.20	75		0.32	0.41	0.07	M262	180
1MBI100U4F-120L-50	1200	± 20	100	540	2.20	100		0.32	0.41	0.07	M262	180
1MBI200U4H-120L-50	1200	± 20	200	1040	2.25	200		0.32	0.41	0.07	M259	360
1MBI150VA-120L-50	1200	± 20	150	785	1.85	150		0.60	0.60	0.04	M262	180
1MBI200VA-120L-50	1200	± 20	200	880	1.80	200		0.60	0.60	0.04	M262	180

 $V_{CE(sat)}$: at $T_{vj}=25^\circ\text{C}$, Chip

IGBT Module Chopper < V series >

■ PrimePACK™ 1200V, 1700V class

Chopper	Low Side	High Side	I_c	1200V		1700V	
				V series		V series	
				Low side configuration	High side configuration	Low side configuration	High side configuration
Chopper	 M271	 Low Side Thermistor High Side Thermistor	650A			1MBI650VXA-170EL-50	1MBI650VXA-170EH-50
						1MBI650VXA-170EL-80	1MBI650VXA-170EH-80
						1MBI650VXA-170EL-54	1MBI650VXA-170EH-54
Chopper	 M272	 Low Side Thermistor High Side Thermistor	1000A			1MBI1000VXB-170EL-50	1MBI1000VXB-170EH-50
						1MBI1000VXB-170EL-80	1MBI1000VXB-170EH-80
						1MBI1000VXB-170EL-54	1MBI1000VXB-170EH-54
			1400A	1MBI1400VXB-120PL-54	1MBI1400VXB-120PH-54	1MBI1400VXB-170PL-50	1MBI1400VXB-170PH-50
				1MBI1400VXB-120PL-80	1MBI1400VXB-120PH-80	1MBI1400VXB-170PL-54	1MBI1400VXB-170PH-54

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_c Cont.	P_c Watts	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.	Package	Net mass Grams
					Volts	Volts	Amps.	Amps.			
1MBI1400VXB-120PL-54	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250
1MBI1400VXB-120PL-80	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250
1MBI1400VXB-120PH-54	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250
1MBI1400VXB-120PH-80	1200	±20	1400	7650	1.65	1400	1.00	1.20	0.15	M272	1250
1MBI650VXA-170EL-50	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	M271	850
1MBI650VXA-170EL-80	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	M271	850
1MBI650VXA-170EL-54	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	M271	850
1MBI1000VXB-170EL-50	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	M272	1250
1MBI1000VXB-170EL-80	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	M272	1250
1MBI1000VXB-170EL-54	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	M272	1250
1MBI1400VXB-170PL-50	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	M272	1250
1MBI1400VXB-170PL-54	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	M272	1250
1MBI650VXA-170EH-50	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	M271	850
1MBI650VXA-170EH-80	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	M271	850
1MBI650VXA-170EH-54	1700	±20	650	4150	2.00	650	1.25	1.55	0.15	M271	850
1MBI1000VXB-170EH-50	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	M272	1250
1MBI1000VXB-170EH-80	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	M272	1250
1MBI1000VXB-170EH-54	1700	±20	1000	6250	2.00	1000	1.25	1.55	0.15	M272	1250
1MBI1400VXB-170PH-50	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	M272	1250
1MBI1400VXB-170PH-54	1700	±20	1400	8820	2.15	1400	1.25	1.55	0.15	M272	1250

Note1: PrimePACK™ is registered trademark of Infineon Technologies AG, Germany.

Note2: The products with suffix '-54' on this page are labeled to specify the rank of $V_{CE(sat)}$ and V_F .

Note3: "-80": Pre-Applied Thermal-Interface-Material for "-54"

$V_{CE(sat)}$: at $T_{vj}=25^\circ C$, Chip



IGBT Module Chopper < V series >

■ PrimePACK™ 1200V class

Chopper	Low Side Thermistor	High Side Thermistor	Ic	1200V	
				V series	
				Boost (Low side) Chopper	Buck (High side) Chopper
900A			1MBI900VXA-120PD-50	1MBI900VXA-120PC-50	
				1MBI900VXA-120PD-54	1MBI900VXA-120PC-54
				1MBI900VXA-120PD-80	1MBI900VXA-120PC-80

Dimension [mm]

Device type	V _{CES}	V _{GES}	I _c Cont.	P _c Watts	V _{CE(sat)} (V _{GE} =15V)		Switching time			Package	Net mass Grams
					typ.	I _c	t _{on} typ. μ sec.	t _{off} typ. μ sec.	t _f typ. μ sec.		
1MBI900VXA-120PC-50	1200	±20	900	5100	1.65	900	1.10	1.20	0.15	M271	850
1MBI900VXA-120PC-54	1200	±20	900	5100	1.65	900	1.10	1.20	0.15	M271	850
1MBI900VXA-120PC-80	1200	±20	900	5100	1.65	900	1.10	1.20	0.15	M271	850
1MBI900VXA-120PD-50	1200	±20	900	5100	1.65	900	1.10	1.20	0.15	M271	850
1MBI900VXA-120PD-54	1200	±20	900	5100	1.65	900	1.10	1.20	0.15	M271	850
1MBI900VXA-120PD-80	1200	±20	900	5100	1.65	900	1.10	1.20	0.15	M271	850

Note1: PrimePACK™ is registered trademark of Infineon Technologies AG, Germany.





V_{CE(sat)}: at T_j=25°C, ChipNote2: The products with suffix '-54' on this page are labeled to specify the rank of V_{CE(sat)} and V_F.

Note3: Antiparallel diode current rating is 120A. Application circuit is Boost/Buck chopper only.

Note4: "-80": Pre-Applied Thermal-Interface-Material for "-54"

IGBT Module High Speed

■ High Speed 1200V class

Chopper	I_C	1200V High Speed IGBT
 M249	200A	1MBI200HH-120L-50
	300A	1MBI300HH-120L-50
	400A	1MBI400HH-120L-50
2-pack	100A	2MBI100HB-120-50
 M233		
2-pack	150A	2MBI150HH-120-50
 M249	200A	2MBI200HH-120-50
2-pack	100A	2MBI100HJ-120-50
 M276	150A	2MBI150HJ-120-50
	200A	2MBI200HJ-120-50
	300A	2MBI300HJ-120-50

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)}$ ($V_{GE}=15V$)	t_{on} typ. μ sec.	t_{off} typ. μ sec.	t_f typ. μ sec.	Package	Net mass Grams
	Volts	Volts	Amps.	Watts	Volts					
1MBI200HH-120L-50	1200	± 20	200	1390	3.10	200	0.2	0.3	0.05	M249 370
1MBI300HH-120L-50	1200	± 20	300	2090	3.20	300	0.2	0.3	0.05	M249 370
1MBI400HH-120L-50	1200	± 20	400	2500	3.10	400	0.2	0.4	0.05	M249 370
2MBI100HB-120-50	1200	± 20	100	1040	3.10	100	-	0.30	0.05	M233 240
2MBI150HH-120-50	1200	± 20	150	1390	3.20	150	-	0.30	0.05	M249 370
2MBI200HH-120-50	1200	± 20	200	1790	3.10	200	-	0.30	0.05	M249 370
2MBI100HJ-120-50	1200	± 20	100	655	3.20	100	0.25	0.30	0.05	M276 370
2MBI150HJ-120-50	1200	± 20	150	925	3.20	150	0.25	0.30	0.05	M276 370
2MBI200HJ-120-50	1200	± 20	200	1385	3.20	200	0.25	0.30	0.05	M276 370
2MBI300HJ-120-50	1200	± 20	300	1950	3.20	300	0.25	0.30	0.05	M276 370

$V_{CE(sat)}$: at $T_{vj}=25^\circ C$, Chip


IGBT Module 3-level < V series >

■ T/I-type NPC 3-level Circuits 600V, 1200V, 1700V class


■ Features

- Applicable to T/I-type NPC 3-level circuit, for high power conversion efficiency.
 - There are 1-leg or 3-leg (3 phase) circuits in one package and it is easier to makes external wiring of module.
 - Lower surge voltage by smaller internal package stray inductance.


- Lower power loss can be achieved by using RB-IGBT*³ as for T-type AC-SW device.
 - Lowest power loss can be achieved by using 6th Gen. IGBT and FWD as for Main-SW device.

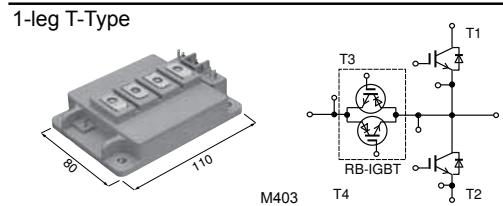

	T1, T2	600V	1200V			1700V
<i>Ic</i>	T3, T4	600V	900V			1200V
220A						4MBI220VF-170R2-50
						4MBI220VF-170R2-60
300A		4MBI300VG-120R-50	4MBI300VG-120R1-50			
340A		4MBI340VF-120R-50				
400A	4MBI400VG-060R-50	4MBI400VF-120R-50 ^{*1}				

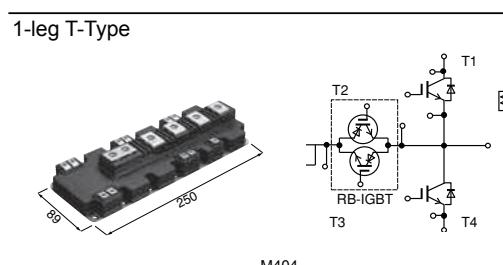

450A		4MBI450VB-120RA-50		
450A		4MBI450VB-120R1-50		4MBI450VB-170R2-50
		4MBI450VB-120R1-60		4MBI450VB-170R2-60
600A				4MBI600VB-170R2-50
				4MBI600VB-170R2-60
650A		4MBI650VB-120R1-50		
		4MBI650VB-120R1-60		
900A		4MBI900VB-120RA-50	4MBI900VB-120R1-50	
		4MBI900VB-120RA-60	4MBI900VB-120R1-60	

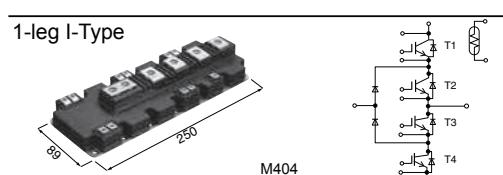

600A			4MBI600VC-120-50	
			4MBI600VC-120-60	

Dimension [mm]

Device type	T1, T2					T3, T4					Package	Net mass		
	V_{CES}	I_c	P_C	$V_{CE(sat)} (V_{GE}=15V)$		V_{CES}	I_c	P_C	$V_{CE(sat)} (V_{GE}=15V)$					
	Volts	Cont.	typ.	I_c	Amps.	Volts	Cont.	typ.	I_c	Amps.				
4MBI400VG-060R-50	600	400	1135	1.60	400	600	400	1560	2.45	400	M403	460		
4MBI300VG-120R-50	1200	300	1250	1.85	300	600	300	1250	2.45	300	M403	460		
4MBI300VG-120R1-50	1200	300	1500	1.85	300	900	300	1550	2.30	300	M403	460		
4MBI340VF-120R-50	1200	340	1500	1.85	300	600	340	1500	2.45	300	M403	460		
4MBI400VF-120R-50^{*1}	1200	400	1835	2.00	400	600	450	2230	2.45	400	M403	460		
4MBI450VF-120RD-50^{*2}	1200	250	1250	1.75	200	600	450	2230	2.45	400	M403	460		
4MBI450VB-120R1-50	1200	450	2205	1.85	450	900	450	1980	2.30	450	M404	1300		
4MBI450VB-120R1-60	1200	450	2205	1.85	450	900	450	1980	2.30	450	M404	1300		
4MBI650VB-120R1-50	1200	650	3060	1.80	650	900	650	2660	2.25	650	M404	1300		
4MBI650VB-120R1-60	1200	650	3060	1.80	650	900	650	2660	2.25	650	M404	1300		
4MBI900VB-120R1-50	1200	900	3950	1.85	900	900	900	3675	2.30	900	M404	1300		
4MBI900VB-120R1-60	1200	900	3950	1.85	900	900	900	3675	2.30	900	M404	1300		
4MBI900VB-120RA-50	1200	900	3950	1.85	900	600	900	2660	2.45	900	M404	1300		
4MBI900VB-120RA-60	1200	900	3950	1.85	900	600	900	2660	2.45	900	M404	1300		
4MBI600VC-120-50	1200	600	2460	1.85	600	1200	600	2460	1.85	600	M404	1300		
4MBI600VC-120-60	1200	600	2460	1.85	600	1200	600	2460	1.85	600	M404	1300		
4MBI220VF-170R2-50	1700	220	1500	2.00	200	1200	220	1865	2.70	200	M403	460		
4MBI220VF-170R2-60	1700	220	1500	2.00	200	1200	220	1865	2.70	200	M403	460		
4MBI450VB-170R2-50	1700	450	2830	2.00	450	1200	450	2660	2.70	450	M404	1300		
4MBI450VB-170R2-60	1700	450	2830	2.00	450	1200	450	2660	2.70	450	M404	1300		
4MBI600VB-170R2-50	1700	600	3410	2.00	600	1200	600	3680	2.70	600	M404	1300		
4MBI600VB-170R2-60	1700	600	3410	2.00	600	1200	600	3680	2.70	600	M404	1300		

●: New products ○: Under development

●: New products ○: Under development
Note 1: VE type is lower thermal impedance version

Note 1: VF type is lower thermal impedance version.
Note 2: The products with suffix '60' on this page are labeled the characteristic data



*1: Particular for Inverter *2: Particular for Converter *3: RB-JGBT, Reverse-Blocking IGBT, which has reverse blocking capability (between emitter and collector).

$V_{CE(sat)}$ at $T_{vi}=25^{\circ}\text{C}$, Chip

IGBT Module 3-level < V series >



■ T/I-type NPC 3-level Circuits 1200V class

3-leg Solder pins

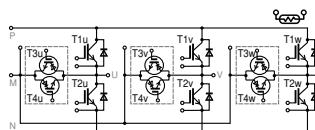

<i>Ic</i>	T1, T2 T3, T4	1200V 600V
50A	12MBI50VN-120-50	
75A	12MBI75VN-120-50	
100A	12MBI100VN-120-50	

3-leg Press fit pins

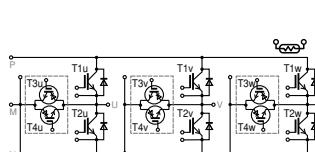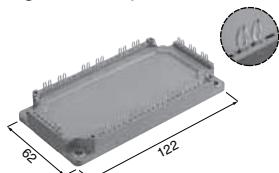

50A	12MBI50VX-120-50
75A	12MBI75VX-120-50
100A	12MBI100VX-120-50

Dimension [mm]

Device type	T1, T2					T3, T4					Package	Net mass	
	V_{CES}	I_c	P_C	$V_{CE(sat)} (V_{GE}=15V)$		V_{CES}	I_c	P_C	$V_{CE(sat)} (V_{GE}=15V)$				
	Volts	Amps.	Watts	typ.	I_c	Volts	Amps.	Watts	typ.	I_c	Amps.		
12MBI50VN-120-50	1200	50	230	1.85	50	600	50	235	2.45	50		M1203 302	
12MBI75VN-120-50	1200	75	320	1.85	75	600	75	305	2.45	75		M1203 302	
12MBI100VN-120-50	1200	100	430	1.75	100	600	100	400	2.45	100		M1203 302	
12MBI50VX-120-50	1200	50	230	1.85	50	600	50	235	2.45	50		M1202 302	
12MBI75VX-120-50	1200	75	320	1.85	75	600	75	305	2.45	75		M1202 302	
12MBI100VX-120-50	1200	100	430	1.75	100	600	100	400	2.45	100		M1202 302	

$V_{CE(sat)}$: at $T_{vj}=25^{\circ}\text{C}$, Chip




IGBT Module IPM < X series >

■ Small IPM (Intelligent Power Module) 600V class

Built-in protection functions

P-side fault status output (Alarm)
 N-side fault status output (Alarm)
 Under voltage protection (self shutdown)
 Over current protection (External current detection and shutdown)
 Overheating protection (self shutdown)
 Temperature sensor output (Vtemp, out)

Small IPM with High Voltage Driver-Ic
 without Brake-Chopper

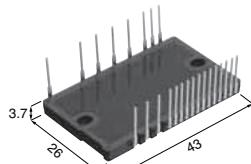

Ic	600V			
	X series			
15A	6MBP15XSD060-50			
20A	6MBP20XSD060-50			
30A	6MBP30XSD060-50			
35A	6MBP35XSD060-50			
15A	6MBP15XSF060-50			
20A	6MBP20XSF060-50			
30A	6MBP30XSF060-50			
35A	6MBP35XSF060-50			

Dimension [mm]


Device type	Inverter			Control						Package	Net mass Grams	
	V _{CES} Cont.	I _c Amps.	V _{CE(sat)} typ.	V _{CCL}	Boot-	Input signal	Protection function					
				V _{CCH}	strap	Active logic	UV	OC	Vtemp	TOH		
	Volts	Amps.	Volts	Volts	VB	Diode	V _{CCL} typ.	*1	*2	*2		
● 6MBP15XSD060-50	600	15	1.60	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	-	N-side(UV,OC)	P633A 9.3
● 6MBP20XSD060-50	600	20	1.60	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	-	N-side(UV,OC)	P633A 9.3
● 6MBP30XSD060-50	600	30	1.60	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	-	N-side(UV,OC)	P633A 9.3
● 6MBP35XSD060-50	600	35	1.40	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	-	N-side(UV,OC)	P633A 9.3
● 6MBP15XSF060-50	600	15	1.60	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	N-side(143±7°C)	N-side(UV,OC,TOH)	P633A 9.3
● 6MBP20XSF060-50	600	20	1.60	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	N-side(143±7°C)	N-side(UV,OC,TOH)	P633A 9.3
● 6MBP30XSF060-50	600	30	1.60	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	N-side(143±7°C)	N-side(UV,OC,TOH)	P633A 9.3
● 6MBP35XSF060-50	600	35	1.40	15	Built-in	High(3.3/5V)	P&N-side	N-side	N-side	N-side(143±7°C)	N-side(UV,OC,TOH)	P633A 9.3

●:New Products

*1: External current detection

*2: Temperature detection in LVIC


Block Diagram


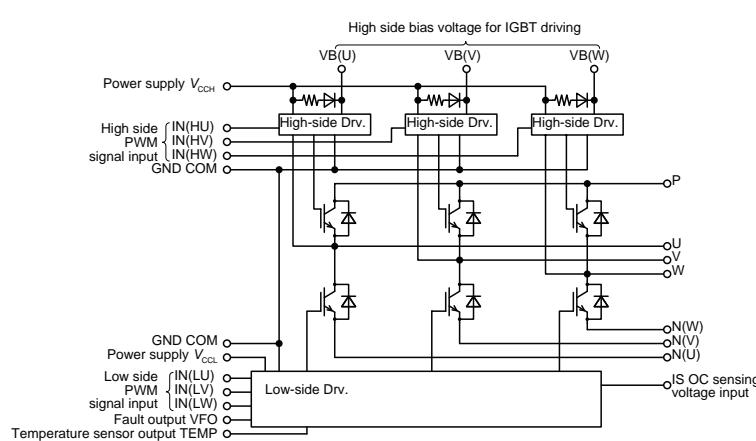


IGBT Module IPM < V series >

■ IPM (Intelligent Power Module) 600V, 1200V class

Built-in protection functions

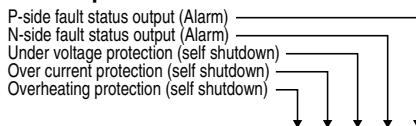

I _c	600V		1200V	
	V series		V series	
	Without Brake-Chopper	With Brake-Chopper	Without Brake-Chopper	With Brake-Chopper
 P629	10A		6MBP10VAA120-50	
	15A		6MBP15VAA120-50	
	20A 6MBP20VAA060-50			
	25A		6MBP25VAA120-50	
	30A 6MBP30VAA060-50			
	50A 6MBP50VAA060-50			
 P626	25A		6MBP25VBA120-50	
	35A		6MBP35VBA120-50	
	50A 6MBP50VBA060-50		6MBP50VBA120-50	
	75A 6MBP75VBA060-50			
 P636	25A		6MBP25VFN120-50	7MBP25VFN120-50
	35A		6MBP35VFN120-50	7MBP35VFN120-50
	50A 6MBP50VFN060-50	7MBP50VFN060-50	6MBP50VFN120-50	7MBP50VFN120-50
	75A 6MBP75VFN060-50	7MBP75VFN060-50		
	100A 6MBP100VFN060-50	7MBP100VFN060-50		

Dimension [mm]

Device type	Inverter			Brake			Control					Package	Net mass	
	V _{CES} Volts	I _c Cont. typ. Amps.	V _{CE(sat)} Volts	V _{CES} Volts	I _c Cont. typ. Amps.	V _{CC} typ. Volts	I _{OC[INV]} min. Amps.	V _{UV} Volts	T _{JOH} min. °C	Alarm signal hold time	OC typ. ms	UV typ. ms	T _{JOH} typ. ms	
6MBP20VAA060-50	600	20	1.4	-	-	15	30	11.0 to 12.5	150	2	4	8	P629	80
6MBP30VAA060-50	600	30	1.4	-	-	15	45	11.0 to 12.5	150	2	4	8	P629	80
6MBP50VAA060-50	600	50	1.4	-	-	15	75	11.0 to 12.5	150	2	4	8	P629	80
6MBP50VBA060-50	600	50	1.4	-	-	15	75	11.0 to 12.5	150	2	4	8	P626	100
6MBP75VBA060-50	600	75	1.4	-	-	15	113	11.0 to 12.5	150	2	4	8	P626	100
6MBP50VFN060-50	600	50	1.25	-	-	15	100	11.0 to 12.5	150	2	4	8	P636	190
6MBP75VFN060-50	600	75	1.25	-	-	15	150	11.0 to 12.5	150	2	4	8	P636	190
6MBP100VFN060-50	600	100	1.25	-	-	15	200	11.0 to 12.5	150	2	4	8	P636	190
7MBP50VFN060-50	600	50	1.25	600	30	15	100	11.0 to 12.5	150	2	4	8	P636	190
7MBP75VFN060-50	600	75	1.25	600	50	15	150	11.0 to 12.5	150	2	4	8	P636	190
7MBP100VFN060-50	600	100	1.25	600	50	15	200	11.0 to 12.5	150	2	4	8	P636	190
6MBP10VAA120-50	1200	10	1.7	-	-	15	15	11.0 to 12.5	150	2	4	8	P629	80
6MBP15VAA120-50	1200	15	1.7	-	-	15	23	11.0 to 12.5	150	2	4	8	P629	80
6MBP25VAA120-50	1200	25	1.7	-	-	15	38	11.0 to 12.5	150	2	4	8	P629	80
6MBP25VBA120-50	1200	25	1.7	-	-	15	38	11.0 to 12.5	150	2	4	8	P626	100
6MBP35VBA120-50	1200	35	1.7	-	-	15	53	11.0 to 12.5	150	2	4	8	P626	100
6MBP50VBA120-50	1200	50	1.7	-	-	15	75	11.0 to 12.5	150	2	4	8	P626	100
6MBP25VFN120-50	1200	25	1.7	-	-	15	50	11.0 to 12.5	150	2	4	8	P636	190
6MBP35VFN120-50	1200	35	1.7	-	-	15	70	11.0 to 12.5	150	2	4	8	P636	190
6MBP50VFN120-50	1200	50	1.7	-	-	15	100	11.0 to 12.5	150	2	4	8	P636	190
7MBP25VFN120-50	1200	25	1.7	1200	15	15	50	11.0 to 12.5	150	2	4	8	P636	190
7MBP35VFN120-50	1200	35	1.7	1200	25	15	70	11.0 to 12.5	150	2	4	8	P636	190
7MBP50VFN120-50	1200	50	1.7	1200	25	15	100	11.0 to 12.5	150	2	4	8	P636	190



Power Devices (IGBT)

IGBT

IGBT Module IPM < V series >

IPM (Intelligent Power Module) 600V, 1200V class

Built-in protection functions

P-side fault status output (Alarm)
 N-side fault status output (Alarm)
 Under voltage protection (self shutdown)
 Over current protection (self shutdown)
 Overheating protection (self shutdown)


I _C	600V		1200V	
	V series		V series	
	Without Brake-Chopper	With Brake-Chopper	Without Brake-Chopper	With Brake-Chopper
25A			6MBP25VDA120-50	7MBP25VDA120-50
35A			6MBP35VDA120-50	7MBP35VDA120-50
50A	6MBP50VDA060-50	7MBP50VDA060-50	6MBP50VDA120-50	7MBP50VDA120-50
75A	6MBP75VDA060-50	7MBP75VDA060-50	6MBP75VDA120-50	7MBP75VDA120-50
			6MBP75VDN120-50	7MBP75VDN120-50
100A	6MBP100VDA060-50	7MBP100VDA060-50	6MBP100VDA120-50	7MBP100VDA120-50
	6MBP100VDN060-50	7MBP100VDN060-50	6MBP100VDN120-50	7MBP100VDN120-50
150A	6MBP150VDA060-50	7MBP150VDA060-50		
	6MBP150VDN060-50	7MBP150VDN060-50		
200A	6MBP200VDA060-50	7MBP200VDA060-50		
	6MBP200VDN060-50	7MBP200VDN060-50		
P630				
100A				
150A				
200A				
300A				
400A				
P631				

Dimension [mm]


Block Diagram

- 6MBP□VAA060-50
- 6MBP□VAA120-50



- 6MBP□VBA060-50
- 6MBP□VBA120-50

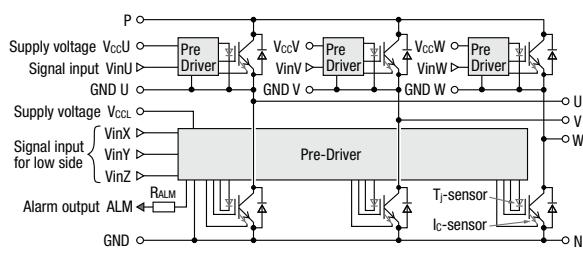

- 6MBP□VFN□-50
- 6MBP□VDA□-50
- 6MBP□VDN□-50
- 6MBP□VEA□-50

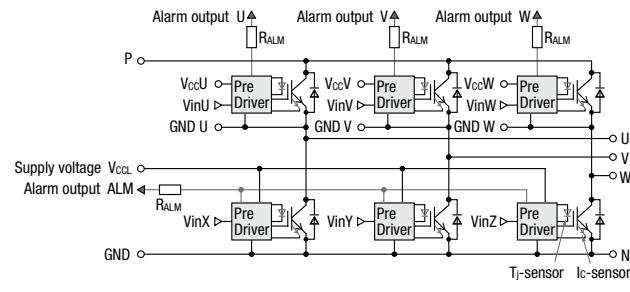

- 7MBP□VFN□-50
- 7MBP□VDA□-50
- 7MBP□VDN□-50
- 7MBP□VEA□-50

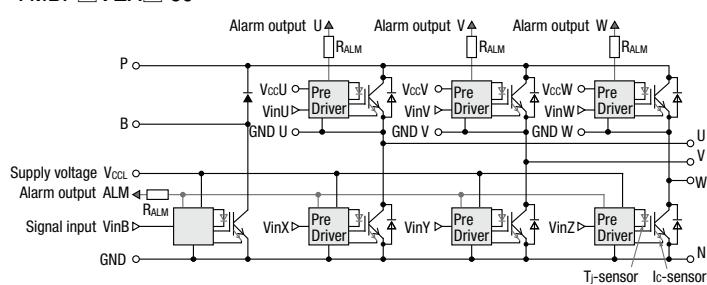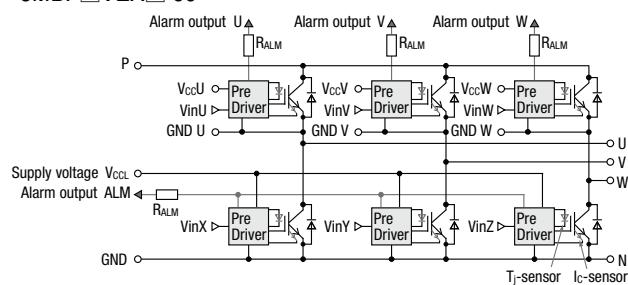

Device type	Inverter			Brake		Control						Package	Net mass	
	V_{CES} Volts	I_c Cont. Amps.	$V_{CE(sat)}$ typ. Volts	V_{CES} Volts	I_c Cont. Amps.	V_{CC} typ. Volts	$I_{OC[INV]}$ min. Amps.	V_{UV} Volts	T_{JOH} min. °C	Alarm signal hold time	OC typ. ms	UV typ. ms	T_{JOH} typ. ms	
									OC typ. ms				Grams	
6MBP50VDA060-50	600	50	1.4	-	-	15	75	11.0 to 12.5	150	2	4	8	P630	290
6MBP75VDA060-50	600	75	1.4	-	-	15	113	11.0 to 12.5	150	2	4	8	P630	290
6MBP100VDA060-50	600	100	1.4	-	-	15	150	11.0 to 12.5	150	2	4	8	P630	290
6MBP100VDN060-50	600	100	1.4	-	-	15	150	11.0 to 12.5	150	2	4	8	P630	290
6MBP150VDA060-50	600	150	1.4	-	-	15	225	11.0 to 12.5	150	2	4	8	P630	290
6MBP150VDN060-50	600	150	1.4	-	-	15	225	11.0 to 12.5	150	2	4	8	P630	290
6MBP200VDA060-50	600	200	1.4	-	-	15	300	11.0 to 12.5	150	2	4	8	P630	290
6MBP200VDN060-50	600	200	1.4	-	-	15	300	11.0 to 12.5	150	2	4	8	P630	290
7MBP50VDA060-50	600	50	1.4	600	30	15	75	11.0 to 12.5	150	2	4	8	P630	290
7MBP75VDA060-50	600	75	1.4	600	50	15	113	11.0 to 12.5	150	2	4	8	P630	290
7MBP100VDA060-50	600	100	1.4	600	50	15	150	11.0 to 12.5	150	2	4	8	P630	290
7MBP100VDN060-50	600	100	1.4	600	50	15	150	11.0 to 12.5	150	2	4	8	P630	290
7MBP150VDA060-50	600	150	1.4	600	75	15	225	11.0 to 12.5	150	2	4	8	P630	290
7MBP150VDN060-50	600	150	1.4	600	75	15	225	11.0 to 12.5	150	2	4	8	P630	290
7MBP200VDA060-50	600	200	1.4	600	100	15	300	11.0 to 12.5	150	2	4	8	P630	290
7MBP200VDN060-50	600	200	1.4	600	100	15	300	11.0 to 12.5	150	2	4	8	P630	290
6MBP200VEA060-50	600	200	1.25	-	-	15	300	11.0 to 12.5	150	2	4	8	P631	940
6MBP300VEA060-50	600	300	1.25	-	-	15	450	11.0 to 12.5	150	2	4	8	P631	940
6MBP400VEA060-50	600	400	1.25	-	-	15	600	11.0 to 12.5	150	2	4	8	P631	940
7MBP200VEA060-50	600	200	1.25	600	100	15	300	11.0 to 12.5	150	2	4	8	P631	940
7MBP300VEA060-50	600	300	1.25	600	150	15	450	11.0 to 12.5	150	2	4	8	P631	940
7MBP400VEA060-50	600	400	1.25	600	200	15	600	11.0 to 12.5	150	2	4	8	P631	940
6MBP25VDA120-50	1200	25	1.7	-	-	15	38	11.0 to 12.5	150	2	4	8	P630	290
6MBP35VDA120-50	1200	35	1.7	-	-	15	53	11.0 to 12.5	150	2	4	8	P630	290
6MBP50VDA120-50	1200	50	1.7	-	-	15	75	11.0 to 12.5	150	2	4	8	P630	290
6MBP50VDN120-50	1200	50	1.7	-	-	15	75	11.0 to 12.5	150	2	4	8	P630	290
6MBP75VDA120-50	1200	75	1.7	-	-	15	113	11.0 to 12.5	150	2	4	8	P630	290
6MBP75VDN120-50	1200	75	1.7	-	-	15	113	11.0 to 12.5	150	2	4	8	P630	290
6MBP100VDA120-50	1200	100	1.7	-	-	15	150	11.0 to 12.5	150	2	4	8	P630	290
6MBP100VDN120-50	1200	100	1.7	-	-	15	150	11.0 to 12.5	150	2	4	8	P630	290
7MBP25VDA120-50	1200	25	1.7	1200	15	15	38	11.0 to 12.5	150	2	4	8	P630	290
7MBP35VDA120-50	1200	35	1.7	1200	15	15	53	11.0 to 12.5	150	2	4	8	P630	290
7MBP50VDA120-50	1200	50	1.7	1200	25	15	75	11.0 to 12.5	150	2	4	8	P630	290
7MBP50VDN120-50	1200	50	1.7	1200	25	15	75	11.0 to 12.5	150	2	4	8	P630	290
7MBP75VDA120-50	1200	75	1.7	1200	35	15	113	11.0 to 12.5	150	2	4	8	P630	290
7MBP75VDN120-50	1200	75	1.7	1200	35	15	113	11.0 to 12.5	150	2	4	8	P630	290
7MBP100VDA120-50	1200	100	1.7	1200	50	15	150	11.0 to 12.5	150	2	4	8	P630	290
7MBP100VDN120-50	1200	100	1.7	1200	50	15	150	11.0 to 12.5	150	2	4	8	P630	290
6MBP100VEA120-50	1200	100	1.7	-	-	15	150	11.0 to 12.5	150	2	4	8	P631	940
6MBP150VEA120-50	1200	150	1.7	-	-	15	225	11.0 to 12.5	150	2	4	8	P631	940
6MBP200VEA120-50	1200	200	1.7	-	-	15	300	11.0 to 12.5	150	2	4	8	P631	940
7MBP100VEA120-50	1200	100	1.7	1200	50	15	150	11.0 to 12.5	150	2	4	8	P631	940
7MBP150VEA120-50	1200	150	1.7	1200	75	15	225	11.0 to 12.5	150	2	4	8	P631	940
7MBP200VEA120-50	1200	200	1.7	1200	100	15	300	11.0 to 12.5	150	2	4	8	P631	940

Note: The products with "VDN" on this page have high heat dissipation characteristics.




Power Devices (IGBT)

IGBT

Discrete IGBT

Package	V_{CES} (V)	I_C (A)	Trench-FS								RB-IGBT
			V series		High-Speed V series		High-Speed W series			XS series	
TO-247-P2	600/ 650	30	FGW30N60VD						FGW30N65W		FGW30XS65
		35		FGW35N60HD	FGW35N60H					FGW30XS65C	
		40					FGW40N65WD		FGW40N65W		FGW40XS65
		50	FGW50N60VD	FGW50N60HD	FGW50N60H		FGW50N65WD		FGW50N65W		FGW50XS65
		60					FGW50N65WE			FGW50XS65C	
		75		FGW75N60HD	FGW75N60H		FGW75N65WE		FGW75N65W		FGW75XS65
		85									FGW85N60RB
		15	FGW15N120VD	FGW15N120HD	FGW15N120H						
	1200	25	FGW25N120VD				FGW25N120WD		FGW25N120W		
		30		FGW30N120HD	FGW30N120H						
		40	FGW40N120VD	FGW40N120HD	FGW40N120H		FGW40N120WD		FGW40N120W		
							FGW40N120WE				
TO-247-4-P2	650	50					FGZ50N65WD				
		75					FGZ50N65WE				
	1200	40					FGZ75N65WE				

■ Recommended operating frequency

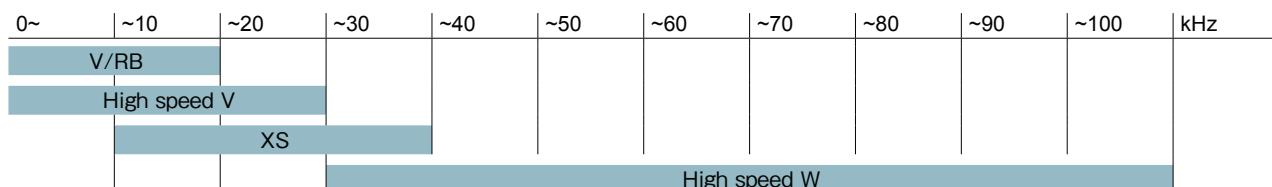

■ Part numbers

FGW30XS65C (example)

F	G	W	40	XS	65	C
Company	Device code	Package code	Current	Series	Voltage	Diode Type
Fuji	G	IGBT	W	TO-247-P2	$\times 1$	XS XS series 65 650V
						C w/ Diode (Full rated)
						Blank w/o Diode

FGW35N60HD (example)

F	G	W	40	N	65	W	D
Company	Device code	Package code	Current	Polarity	Voltage	Series	Diode Type
Fuji	G	IGBT	W	TO-247-P2	$\times 1$	N N-ch 60 600V	W High Speed W series
				Z TO-247-4-P2		65 650V H High Speed V series	C,E w/ Diode (Full rated)
						120 1200V V V series	D w/ Diode
						RB RB-IGBT	Blank w/o Diode

■ Discrete IGBT XS series 650V class

■ Features

- IGBT in Trench-gate structure and Field-stop technology
- Low $V_{CE(sat)}$ and low switching Loss

IGBT in field-stop technology and trench-gate structure with Ultra fast FWD
650V class

Device type	Maximum Ratings				$V_{CE(sat)}$ ($V_{GE}=15V$)	E_{on} ($r_g=10\Omega$)	E_{off}	Q _G	V _F	I _F	Q _{rr}	Package	Net mass	
	V_{CES}	I_c	I_{CP}	P_D										
	Volts	Amps.	Amps.	Watts	Volts	mJ			Volts					
○ FGW30XS65	650	30	120	174	(1.35)	0.23	0.33	123	-	-	-	-	TO-247-P2	6.0
○ FGW30XS65C	650	30	120	174	(1.35)	0.23	0.33	123	(1.78)	30	(0.9)	(0.9)	TO-247-P2	6.0
○ FGW40XS65	650	40	160	234	(1.35)	0.30	0.44	164	-	-	-	-	TO-247-P2	6.0
○ FGW40XS65C	650	40	160	234	(1.35)	0.30	0.44	164	(1.78)	40	(1.2)	(1.2)	TO-247-P2	6.0
○ FGW50XS65	650	50	200	290	(1.35)	0.38	0.55	205	-	-	-	-	TO-247-P2	6.0
○ FGW50XS65C	650	50	200	290	(1.35)	0.38	0.55	205	(1.78)	50	(1.5)	(1.5)	TO-247-P2	6.0
○ FGW75XS65	650	75	300	437	(1.35)	0.57	0.83	308	-	-	-	-	TO-247-P2	6.0
○ FGW75XS65C	650	75	300	437	(1.35)	0.57	0.83	308	(1.78)	75	(2.3)	(2.3)	TO-247-P2	6.0

○ : Under development

■ Discrete IGBT High Speed W series 650V,1200V class

■ Features

- IGBT in Trench-gate structure and Field-stop technology
- Low $V_{CE(sat)}$ and low switching Loss
- High switching frequency (to 100kHz)

IGBT in field-stop technology and trench-gate structure with Ultra fast FWD
650V,1200V class

Device type	Maximum Ratings				$V_{CE(sat)}$ ($V_{GE}=15V$)	E_{on}	E_{off}	Q _G	V _F	I _F	Q _{rr}	Package	Net mass	
	V_{CES}	I_c	I_{CP}	P_D										
	Volts	Amps.	Amps.	Watts	Volts	mJ			Volts					
● FGW30N65W	650	30	120	180	1.8	0.12	0.15	128	-	-	-	-	TO-247-P2	6.0
● FGW40N65W	650	40	160	260	1.8	0.29	0.29	180	-	-	-	-	TO-247-P2	6.0
● FGW40N65WD	650	40	160	260	1.8	0.29	0.29	180	2.5	20	0.26	0.26	TO-247-P2	6.0
● FGW40N65WE	650	40	160	260	1.8	0.29	0.29	180	2.5	40	0.29	0.29	TO-247-P2	6.0
● FGW50N65W	650	50	200	330	1.8	0.42	0.46	215	-	-	-	-	TO-247-P2	6.0
● FGW50N65WD	650	50	200	330	1.8	0.42	0.46	215	2.5	25	0.32	0.32	TO-247-P2	6.0
● FGW50N65WE	650	50	200	330	1.8	0.42	0.46	215	2.5	50	0.35	0.35	TO-247-P2	6.0
● FGZ50N65WD	650	50	200	330	1.8	0.12	0.40	215	2.5	25	0.32	0.32	TO-247-4-P2	6.0
● FGZ50N65WE	650	50	200	330	1.8	0.12	0.40	215	2.5	50	0.35	0.35	TO-247-4-P2	6.0
● FGW60N65W	650	60	240	405	1.8	0.6	0.67	250	-	-	-	-	TO-247-P2	6.0
● FGW60N65WD	650	60	240	405	1.8	0.6	0.67	250	2.5	30	0.3	0.3	TO-247-P2	6.0
● FGW60N65WE	650	60	240	405	1.8	0.6	0.67	250	2.5	60	0.33	0.33	TO-247-P2	6.0
● FGW75N65W	650	75	300	520	1.8	0.95	1.2	300	-	-	-	-	TO-247-P2	6.0
● FGW75N65WE	650	75	300	520	1.8	0.95	1.2	300	2.5	75	0.41	0.41	TO-247-P2	6.0
● FGZ75N65WE	650	75	300	520	1.8	0.37	0.68	300	2.5	75	0.41	0.41	TO-247-4-P2	6.0
● FGW25N120W	1200	25	100	270	2.0	0.9	1.3	80	-	-	-	-	TO-247-P2	6.0
● FGW25N120WD	1200	25	100	270	2.0	0.9	1.3	80	2.2	12	0.6	0.6	TO-247-P2	6.0
● FGW25N120WE	1200	25	100	270	2.0	0.9	1.3	80	2.2	25	0.6	0.6	TO-247-P2	6.0
● FGW40N120W	1200	40	160	430	2.0	2.8	1.6	120	-	-	-	-	TO-247-P2	6.0
● FGW40N120WD	1200	40	160	430	2.0	2.8	1.6	120	2.2	20	0.95	0.95	TO-247-P2	6.0
● FGW40N120WE	1200	40	160	430	2.0	2.8	1.6	120	2.4	40	2.2	2.2	TO-247-P2	6.0
● FGZ40N120WE	1200	40	160	430	2.0	1.1	1.4	120	2.4	40	2.2	2.2	TO-247-4-P2	6.0

● : New products



Power Devices (IGBT)

IGBT

Discrete IGBT V/High Speed V series 600V, 1200V class

■ Features

- IGBT in Trench-gate structure and Field-stop technology
- Low $V_{CE(sat)}$ and low switching Loss
(High Speed V series)
- Short circuit withstand time; $t_{sc}=10\mu s$ (V series)

IGBT in field-stop technology and trench-gate structure with Ultra fast FWD
600V class

Device type	Maximum Ratings				$V_{CE(sat)}$ ($V_{GE}=15V$)	E_{on} ($r_g=10\Omega$)	E_{off}	Q_G	V_F	Q_{rr}	Package	Net mass
	V_{CES} Volts	I_C Amps.	I_{CP} Amps.	P_D Watts								
FGW30N60VD	600	30	60	230	1.6	1.2	0.7	225	1.5	25	0.7	TO-247-P2 6.0
FGW35N60H	600	35	105	230	1.5	0.9	0.85	210	-	-	-	TO-247-P2 6.0
FGW35N60HD	600	35	105	230	1.5	0.9	0.85	210	2.0	15	0.06	TO-247-P2 6.0
FGW35N60HC	600	35	105	230	1.5	0.95	0.85	210	2.35	35	0.13	TO-247-P2 6.0
FGW50N60H	600	50	150	360	1.5	1.4	1.7	305	-	-	-	TO-247-P2 6.0
FGW50N60HD	600	50	150	360	1.5	1.4	1.7	305	2.0	25	0.08	TO-247-P2 6.0
FGW50N60HC	600	50	150	360	1.5	1.5	1.7	305	2.3	50	0.07	TO-247-P2 6.0
FGW50N60VD	600	50	100	360	1.6	2.4	1.4	360	1.5	35	0.75	TO-247-P2 6.0
FGW75N60H	600	75	225	500	1.5	3.0	4.2	460	-	-	0.12	TO-247-P2 6.0
FGW75N60HD	600	75	225	500	1.5	3.0	4.2	460	2.0	35	0.13	TO-247-P2 6.0
FGW75N60HC	600	75	225	500	1.5	3.8	4.2	460	2.3	75	0.3	TO-247-P2 6.0

1200V class

Device type	Maximum Ratings				$V_{CE(sat)}$ ($V_{GE}=15V$)	E_{on} ($r_g=10\Omega$)	E_{off}	Q_G	V_F	Q_{rr}	Package	Net mass
	V_{CES} Volts	I_C Amps.	I_{CP} Amps.	P_D Watts								
FGW15N120H	1200	15	45	155	1.8	0.6	0.8	140	-	-	-	TO-247-P2 6.0
FGW15N120HD	1200	15	45	155	1.8	0.6	0.8	140	2.2	12	0.6	TO-247-P2 6.0
FGW15N120VD	1200	15	30	155	1.85	1.1	0.8	150	1.7	15	0.85	TO-247-P2 6.0
FGW25N120VD	1200	25	50	260	1.85	2.2	1.4	235	1.7	25	1.2	TO-247-P2 6.0
FGW30N120H	1200	30	90	260	1.8	1.6	1.5	230	-	-	-	TO-247-P2 6.0
FGW30N120HD	1200	30	90	260	1.8	1.6	1.5	230	2.2	20	0.95	TO-247-P2 6.0
FGW40N120H	1200	40	120	340	1.8	2.8	1.8	300	-	-	-	TO-247-P2 6.0
FGW40N120HD	1200	40	120	340	1.8	2.8	1.8	300	2.2	30	1.35	TO-247-P2 6.0
FGW40N120VD	1200	40	80	340	1.85	4.3	2.2	320	1.7	30	1.45	TO-247-P2 6.0

Discrete RB-IGBT

■ Features

- Reverse blocking character is realized for 1 chip by Fuji's original technology.
- High efficiency by applying to T-type 3 level inverter circuit.

■ Characteristics

Device type	Maximum Ratings					$V_{CE(sat)}$ ($V_{GE}=15V$)	E_{on} ($r_g=10\Omega$)	E_{off}	Q_G	t_{rr}	Package	Net mass
	V_{CES} Volts	I_C Amps.	I_{CP} Amps.	t_{sc} usec.	P_D Watts							
FGW85N60RB	600	85	170	10	600	2.45	4.7	2.4	300	165	TO-247-P2	6.0

IGBT Module for Electric Vehicle and Hybrid Electric Vehicle

■ IGBT IPM for Electric Vehicle and Hybrid Electric Vehicle

■ Features

- Including circuit board which has IGBT drive and protection function
- Optical isolated
(signal input, IGBT's temperature monitor, alarm output)
- Detection and protection
(short-circuit, over-temperature, under-voltage)
- Lead Free Package



■ Characteristics


($T_{vj}=25^{\circ}\text{C}$)

Device type	V_{CES} Volts	$I_C(\text{Cont})$ Amps.	$V_{CE(\text{sat})}$ typ. Volts	V_F typ. Volts	Package	Net mass Grams
2MBP600UN120V	1200	600	2.00	2.20	P401	680

■ IGBT Module for Electric Vehicle and Hybrid Electric Vehicle

■ Features

- 7th Generation "RC-IGBT" 750V-IGBT
- Direct liquid Cooling AL Water jacket
- High power density, small and light weight package
- High reliability : $T_{vj\max}$ 175°C guaranteed
- RoHS compliant

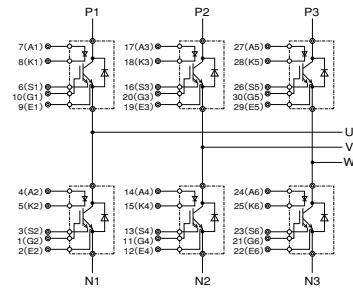

■ Characteristics

$V_{CE(\text{sat})}$: at $T_{vj}=25^{\circ}\text{C}$, Chip

Device type	V_{CES} Volts	$I_C(\text{Cont})$ Amps.	$I_C(\text{Peak})$ Amps.	$V_{CE(\text{sat})}$ typ. Volts	V_F typ. Volts	Package	Net mass Grams
6MBI800XV-075V-01	750	570	1600	1.45 ($I_c=800\text{A}$)	1.50 ($I_f=800\text{A}$)	M653	560


2 SiC Devices

SiC Devices



SiC devices have excellent characteristics that realize high blocking voltage, low power dissipation, high-frequency operation and high-temperature operation.

Power semiconductors that make use of SiC achieve significant reduction in energy consumption, and can be used to develop smaller and lighter products.

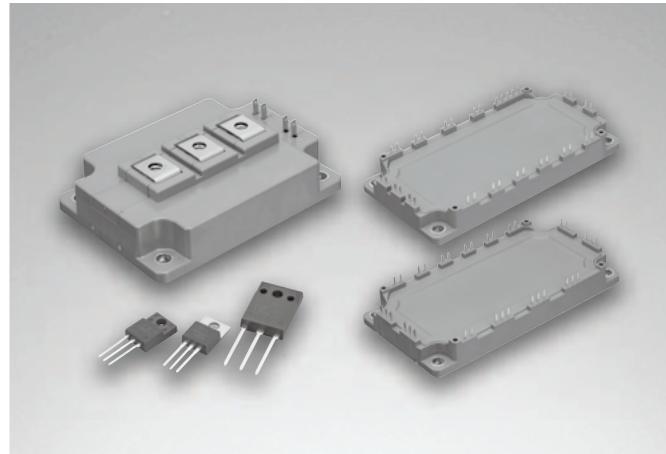

IGBT Hybrid Modules with SiC-SBD X series / V series



■ Features


- High performance chips
 - X series / V series IGBT for low loss operation
 - SiC-SBD for low loss operation
- The same package lineup as the conventional Si-IGBT modules

■ Part numbers

2MSI300VAH-120C-53 (example)

2	MS	I	300	V	A	H	120	C	53
Number of IGBT Switches	Chip : Si-IGBT+SiC-SBD	Internal Configuration	Rated Current	IGBT Device Technology	SBD Dvice	Package Type	Max V _{CE}	SiC-SBD for converter	RoHS Compliant
MS	Si-IGBT+SiC-SBD	I: Standard Modules	× 1	V: V series (6th Generation)	A: 1st gen.		060: 600V	C: Large current	None, 01 to 49 Non RoHS Compliant
S	SiC-SBD	R: Power Integrated Modules		X: X series (7th Generation)			120: 1200V		50 to 99 RoHS Compliant
							170: 1700V		
							330: 3300V		

■ PIM/Built-in converter and brake EconoPIM™ 600, 1200V class

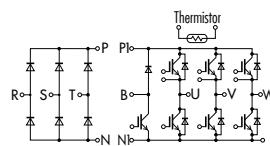		I_C	600V		1200V			
			IGBT Hybrid Modules with SiC-SBD V series					
		35A						
		50A	7MSR35VAB120-50					
		75A	7MSR50VAB060-50					
		100A	7MSR75VAB060-50					
			7MSR100VAB060-50					



Dimension [mm]

Device type	Inverter [IGBT]				Brake [IGBT+FED]			Converter [Diode]				Package	Net mass Grams
	V_{CES} Volts	I_C Cont. Amps.	P_C Watts	$V_{CE(sat)}$ typ. Volts	V_{CES} Volts	I_C Cont. Amps.	V_{RRM} Volts	V_{RRM} Cont. Amps.	I_o typ. Volts	V_{FM} typ. Volts	I_{FSM} Amps.		
● 7MSR50VAB060-50	600	50	215	1.6	600	50	600	800	50	1.3	210	M712	330
● 7MSR75VAB060-50	600	75	300	1.6	600	50	600	800	75	1.25	500	M712	330
● 7MSR100VAB060-50	600	100	335	1.6	600	50	600	800	100	1.25	700	M712	330
● 7MSR35VAB120-50	1200	35	210	1.85	1200	25	1200	1600	35	1.35	260	M712	330
● 7MSR50VAB120-50	1200	50	280	1.85	1200	35	1200	1600	50	1.35	360	M712	330

● : New Products

Note: EconoPIM™ is registered trademarks of Infineon Technologies AG, Germany.

■ 6-pack EconoPACK™ 1200V class

		I_C	1200V	
			IGBT Hybrid Modules with SiC-SBD V series	
		100A	6MSI100VAB-120-50	






Dimension [mm]

Device type	V_{CES} Volts	V_{GES} Volts	I_C Cont. Amps.	P_C Watts	$V_{CE(sat)}$ ($V_{GE}=15V$) typ. Volts	I_C Amps.	Switching time			Package	Net mass Grams
							t_{on} typ. usec.	t_{off} typ. usec.	t_f typ. usec.		
● 6MSI100VAB-120-50	1200	±20	100	520	1.75	100	0.39	0.42	0.05	M633	300

● : New Products

Note: EconoPIM™ is registered trademarks of Infineon Technologies AG, Germany.

■ Standard 2-pack 1200, 1700V class

		I_C	1200V		1700V	
			IGBT Hybrid Modules with SiC-SBD V series			
			200A	2MSI200VAB-120-53		
		300A	2MSI300VAH-120C-53			
		400A			2MSI400VAE-170-53	
		300A	2MSI300VAN-120-53			
			450A		2MSI450VAN-120-53	
			550A		2MSI550VAN-170-53	
			600A		2MSI600VAN-120-53	
		1200A			2MSI1200VAT-170PC	
					2MSI1200VAT-170EC	

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_C	$V_{CE(sat)} (V_{GE}=15V)$ typ.	I_C Amps.	Switching time		Package	Net mass Grams
	Volts	Volts	Amps.	Watts			t_{on} typ. μsec.	t_{off} typ. μsec.		
● 2MSI200VAB-120-53	1200	±20	200	1500	1.75	200	0.64	0.70	0.07	M274 270
● 2MSI300VAH-120C-53	1200	±20	300	1600	1.75	300	0.82	0.84	0.09	M276 370
● 2MSI300VAN-120-53	1200	±20	300	1595	1.75	300	0.49	0.72	0.12	M254 300
● 2MSI450VAN-120-53	1200	±20	450	2270	1.75	450	0.36	0.72	0.07	M254 300
○ 2MSI600VAN-120-53	1200	±20	600	3750	1.85	600	0.55	1.05	0.11	M254 300
○ 2MSI550VAN-170-53	1700	±20	550	3750	2.15	550	0.69	1.18	0.10	M254 300
● 2MSI400VAE-170-53	1700	±20	400	4540	2.00	400	1.05	1.95	0.09	M277 470
○ 2MSI1200VAT-170PC	1700	±20	1200	7040	1.80	1200	2.63	2.60	0.50	M278 900
○ 2MSI1200VAT-170EC	1700	±20	1200	7040	2.00	1200	1.77	1.59	0.16	M278 900

● : New Products ○ : Under development

■ Standard 1-pack 3300V class

I_C	3300V	
	IGBT Hybrid Modules with SiC-SBD X series	
1200A	1MSI1200XAGF330-03	
1800A	1MSI1800XAEF330-03	

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_{tot}	$V_{CE(sat)}$ ($V_{GE}=15V$)		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_C	$t_{d(on)}$ typ. μsec.	$t_{d(off)}$ typ. μsec.	t_f typ. μsec.		
● 1MSI1200XAGF330-03	3300	±20	1200	12500	2	1200	1.6	1.65	1.25	M155	900
● 1MSI1800XAEF330-03	3300	±20	1800	18650	2	1800	1.6	1.8	1.3	M156	1300

●:New Products

2 SiC Devices

SiC

■ Standard 2-pack 3300V class

I_C	3300V	
	SiC-SBD series	
900A	2SI900AGF330-03	

Dimension [mm]

Device type	V_{CES}	V_{GES}	I_C	P_{tot}	$V_{CE(sat)} (V_{GE}=15V)$		Switching time			Package	Net mass
	Volts	Volts	Amps.	Watts	typ.	I_C	$t_{d(on)}$ typ.	$t_{d(off)}$ typ.	t_f typ.		
● 2SI900AGF330-03	3300	-	900	-	2.05	900	-	-	-	M289	900

●:New Products



SiC Schottky-Barrier Diodes (SBD)

■ Features

- High speed switching
- High-frequency operation, miniaturization, weight saving
- Low- V_F
- Low- I_R
 - $T_{vj}=175^{\circ}\text{C}$ Guaranteed, High-temperature operation, Low-Loss, High efficiency
 - High avalanche capability

■ Part numbers

FDCP10S65A(example)

F	DC		P	10	S		65		A
Company code	Device code	Package code	Current	Polarity		Voltage		Application	
Fuji	DC	A	TO-220F	x 1	S, T	Single	65	650V	A For Automotive
		C	T-Pack(S)		C	Cathode Common	120	1200V	
		P	TO-220						
		Y	TO-247						
		W	TO-247-2-P2						

■ SiC-SBD Series

SiC-SBD Series			TO-220-2	TO-220	TO-220F-2	TO-220F	TO-247-2-P2	TO-247	T-Pack(S)
Chip	V_{RRM} (V)	I_F (A)							
Single	650	10	✓		✓			✓	✓
	25	✓			✓			✓	✓
	1200	18			✓		✓	✓	
Dual	650	20		✓		✓		✓	✓
	50							✓	
	1200	36						✓	

Device type	Maximaum rating			Thermal rating	Characteristics ($T_a=25^{\circ}\text{C}$)		Package	Net mass Grams
	V_{RRM} Volts	I_F Amps.	I_{FSM} *1 Amps.	T_{vj} max.(°C)	V_F max. Volts	I_{RRM} *2 max. µA		
FDCP10S65	650	10	50	175	1.8	10	TO-220-2	2.0
FDCP20C65	650	20	50	175	1.8	10	TO-220	2.0
FDCP25S65	650	25	100	175	1.6	10	TO-220-2	2.0
FDCA10S65	650	10	50	175	1.8	10	TO-220F-2	1.7
FDCA20C65	650	20	50	175	1.8	10	TO-220F	1.7
FDCA25S65	650	25	100	175	1.6	10	TO-220F-2	1.7
FDCY10S65	650	10	50	175	1.8	10	TO-247	6.4
FDCY20C65	650	20	50	175	1.8	10	TO-247	6.4
FDCY25S65	650	25	100	175	1.6	10	TO-247	6.4
FDCY50C65	650	50	100	175	1.6	10	TO-247	6.4
FDCC10S65	650	10	50	175	1.8	10	T-Pack(S)	1.6
FDCC20C65	650	20	50	175	1.8	10	T-Pack(S)	1.6
FDCC25S65	650	25	100	175	1.6	10	T-Pack(S)	1.6
FDCA18S120	1200	18	90	175	1.7	10	TO-220F-2	1.7
FDCY18S120	1200	18	90	175	1.7	10	TO-247	6.4
FDCW18T120	1200	18	90	175	1.7	10	TO-247-2-P2	6.0
FDCY36C120	1200	36	90	175	1.7	10	TO-247	6.4

*1: Half sine wave $t_p=10\text{ms}$

*2: $V_R=V_{RRM}$

2 SiC Devices

SiC

■ Automotive SiC Schottky-Barrier Diodes

SiC-SBD Series		TO-220-2	TO-220	TO-247	T-Pack(S)
					
Chip	V_{RRM} (V)	I_F (A)			
Single	650	10	✓		✓
		25	✓		✓
	1200	18			✓
Dual	650	20		✓	✓
		50		✓	
	1200	36			✓

Device type	Maximum rating			T_{vj} and T_{stg} °C	Characteristics ($T_a=25^\circ\text{C}$)		Package	Net mass Grams
	V_{RRM} Volts	I_F Amps.	I_{FSM}^{*1} Amps.		V_F max. Volts	I_{RRM}^{*2} max. μA		
FDCP10S65A	650	10	50	-55 to +175	1.8	5	TO-220-2	2.0
FDCY10S65A	650	10	50	-55 to +175	1.8	5	TO-247	6.4
FDCC10S65A	650	10	50	-55 to +175	1.8	5	T-Pack(S)	1.6
FDCP20C65A	650	20	100	-55 to +175	1.8	5	TO-220	2.0
FDCY20C65A	650	20	100	-55 to +175	1.8	5	TO-247	6.4
FDCC20C65A	650	20	100	-55 to +175	1.8	5	T-Pack(S)	1.6
FDCP25S65A	650	25	100	-55 to +175	1.7	10	TO-220-2	2.0
FDCY25S65A	650	25	100	-55 to +175	1.7	10	TO-247	6.4
FDCC25S65A	650	25	100	-55 to +175	1.7	10	T-Pack(S)	1.6
FDCY50C65A	650	50	200	-55 to +175	1.7	10	TO-247	6.4
FDCY18S120A	1200	18	90	-55 to +175	1.8	10	TO-247	6.4
FDCY36C120A	1200	36	180	-55 to +175	1.8	10	TO-247	6.4


*1: Half sine wave $t_p=10\text{ms}$

*2: $V_R = V_{RRM}$

Integrated Circuits



Fuji Electric offers a lineup of AC/DC and DC/DC power supply control ICs that support a variety of power circuits. These highly efficient, low-noise products with low standby power consumption are compatible with environmental regulations. Furthermore, many protection functions are built into the ICs themselves, allowing for smaller power circuits.

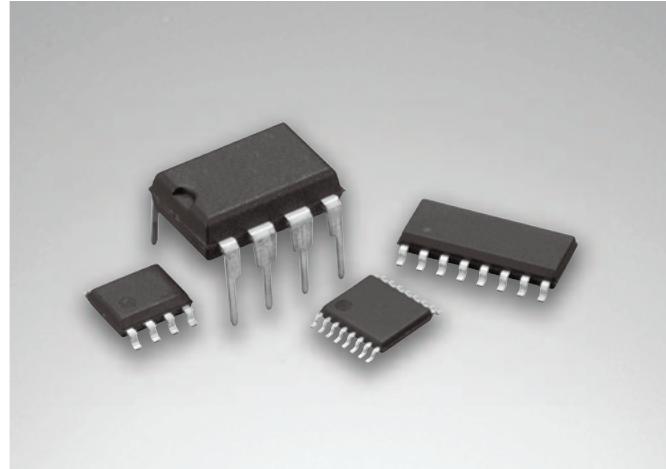

IC

Features of Power Supply control ICs

Green Mode PWM-ICs

■ Features

- Built-in 500/650V withstand voltage start up circuit
- Green mode functions (Intermittent Switching/Linary reduced switching frequency)
- Protect functions (Over voltage/Brown out/2 stage Over power)
- Low EMI noise

Green Mode Quasi-resonant ICs

■ Features

- Built-in 500V withstand voltage start up circuit
- Green mode functions (Intermittent Switching/Linary reduced switching frequency)
- Protect functions (Over voltage/Over load etc.)

Power Factor Correction ICs

■ Features

- Wide electric power range(From 75W to 1kW)
- Power factor ≥ 0.99
- Protect functions (FB Pin open short/Over voltage etc.)

Current Resonant ICs

■ Features

- Realize 1 convertor circuit structure at world wide input power
- Built-in High side driver
- Preventing capacitive region operation
- Protect functions
(Over current/Over voltage/Over load/Over heat/Brown out)
- Green mode function (Intermittent switching)

High and Low side driver IC

■ Features

- High negative transient voltage on VS terminal
- Wide range supply voltage up to 30V (FA5650/5651)
- 3.3V logic compatible
- Built-in under voltage lockout
- Allowable offset supply voltage transient dVs/dt up to 50kV/us
- High speed response: Turn on/off delay time 125ns (Typ)
(FA5650/5651)

■ Part numbers

FA8A00N (example)

F	A	8	A	00	N
Company Symbol	Control System	Series	Generation	Number	Package code
F	Fuji	A	Analog	1 CRMPFC	A 1G
				6 LLC	B 2G
				8 PWM	C 3G
			

FA5590N (example)

F	A	55	90	N
Company Symbol	Control System	Series	Number	Package code
F	Fuji	A	Analog	3X AC/DC
				5X AC/DC
				7X DC/DC
				13X AC/DC

■ AC/DC Power Supply control ICs


● Green mode PWM-ICs (Current mode)

Type Name	Duty	Input voltage	Frequency	Current sense	Over load protection	Over power protection	Over voltage protection	Built-in start up circuit	Green mode function	X-Cap discharge function			
			65kHz	100kHz									
With Brown out function													
FA8A00N	83%	12 - 24V	✓		Positive	Auto-Recovery	2Stage (OPP ratio 1:1.4)	Latch	500V	Linary frequency reduction Intermittent opration			
FA8A40N				✓		Timer-latch							
FA8A01N			✓			Auto-Recovery	2Stage (OPP ratio 1:1.5)						
FA8A41N				✓		Timer-latch							
FA8B16N•		10 - 28V	✓			Auto-Recovery							
FA8A27N				✓		Timer-latch	2Stage (OPP ratio 1:1.8)						
FA8A37N			✓			Auto-Recovery							
FA8A39N				✓		Timer-latch							
Without Brown out function													
FA5680N	85%	11 - 24V	✓		Negative	Auto-Recovery	1Stage	Latch	500V	Linary frequency reduction Intermittent opration			
FA5681N				✓		Timer-latch							
FA8A60N			✓			Auto-Recovery							
FA8A64N				✓		Timer-latch							
FA8A61N			✓			Auto-Recovery							
FA8A65N				✓		Timer-latch							
FA8A70N			✓			Auto-Recovery							
FA8A74N		10 - 24V		✓	Positive	Timer-latch	1Stage	Latch	650V	Linary frequency reduction Intermittent opration			
FA8A71N			✓			Auto-Recovery							
FA8A75N				✓		Timer-latch							
FA8A12N			✓			Auto-Recovery							
FA8A80N				✓		Timer-latch							
FA8A84N			✓			Auto-Recovery							
FA8A81N				✓		Timer-latch							
FA8A85N			✓			Auto-Recovery							
FA8A90N				✓		Timer-latch							
FA8A94N			✓			Auto-Recovery							
FA8A91N				✓		Timer-latch							
FA8A95N			✓			Auto-Recovery							


PKG:SOP-8

●:New Products

● Green mode PWM-ICs with Brown Out function

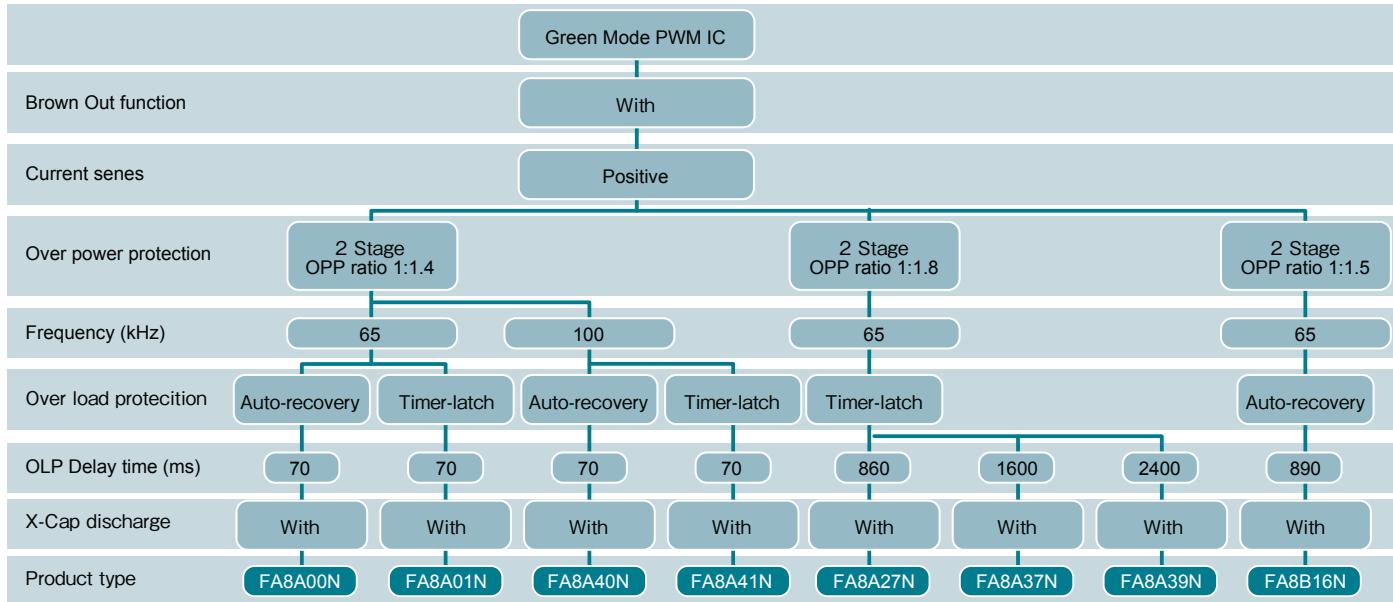


● Green mode PWM-ICs without Brown Out function

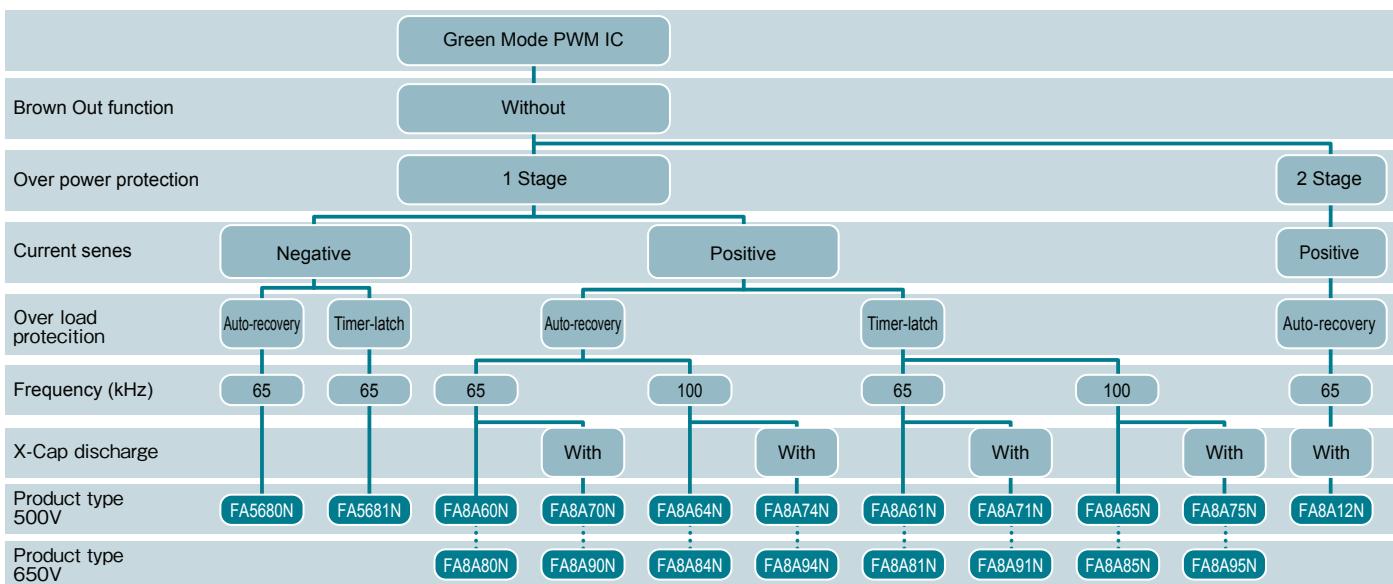


● Block diagram (Main model)

FA8A00N (With Brown out)

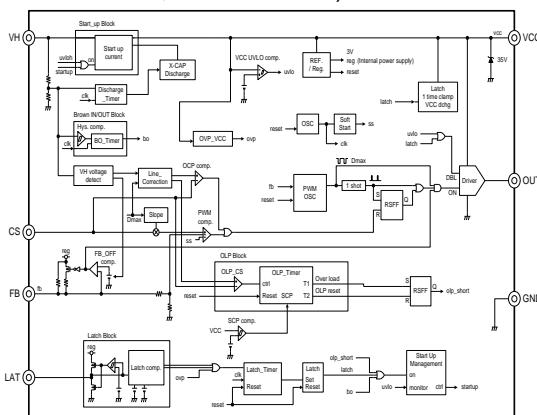

FA8A61N (Without Brown out)

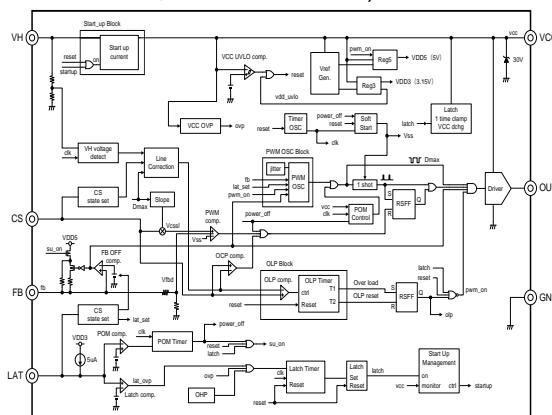


● General PWM-ICs

Type Name	Control mode	Duty	Input voltage	Current sense	Over load protection	Over voltage protection	Under-voltage lockout (ON/OFF)	Remarks					
With Green mode function													
FA3641P/N	Voltage mode	70%	10 - 28V	Positive	Timer-latch	16.5V/9.0V							
FA3647P/N				Negative									
FA5604N		46%	10 - 30V	Negative	Auto-Recovery	Latch	17.5V/9.7V	Frequency reduction start/stop FB voltage under light load 1.8V/1.95V					
FA5605N		70%						Frequency reduction start/stop FB voltage under light load 1.55V/1.65V					
FA5606N													
Without Green mode function													
FA13842P/N	Current mode	96%	10 - 25V	Positive	-	-	16.5V/9.0V						
FA13843P/N							9.6V/9.0V						
FA13844P/N		48%					16.5V/9.0V						
FA13845P/N							9.6V/9.0V						
FA5504P/N	Voltage mode	46%	10 - 28V	Positive	Timer-latch	Latch	16.5V/9.0V	With error amplifier					
FA5510P/N		70%											
FA5511P/N		46%											
FA5514P/N		70%	10 - 30V	Negative	Auto-Recovery		17.5V/9.7V						
FA5515P/N													
FA5607N													

PKG: "P":DIP-8, "N":SOP-8

Frequency: Adjustable


● General PWM-ICs

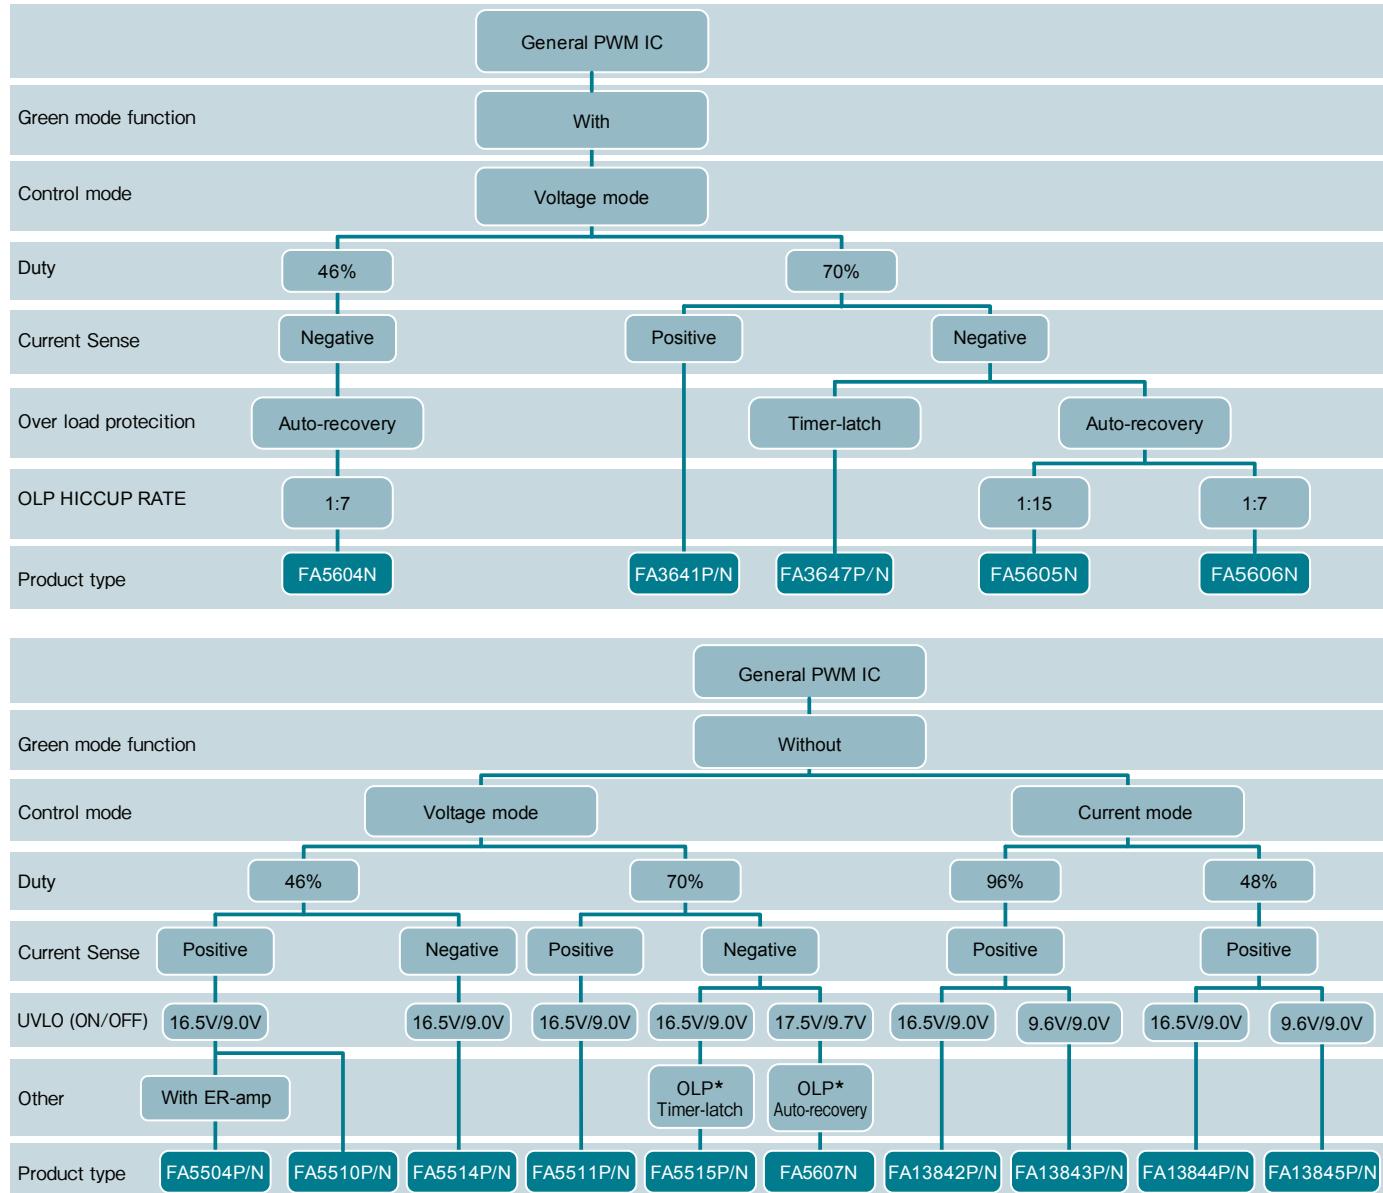


*OLP : Over Load Protection

● Block diagram (Main model)

FA13842P/N

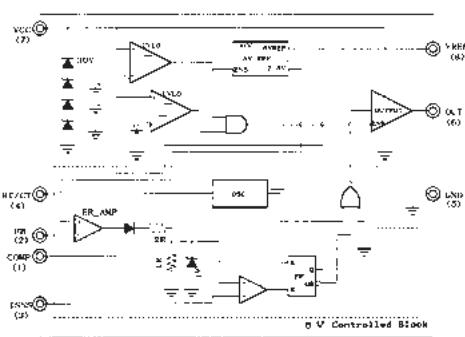

FA5604N

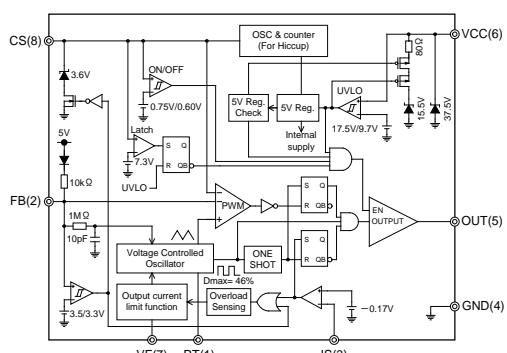


● Green mode Quasi-resonant ICs (Current mode)



Type Name	Input voltage	Maximum frequency	Over load protection	Over voltage sense	Built-in start up circuit	Green mode function	Under-voltage lockout (ON/OFF)	Remarks			
FA5570N	10 - 28V	120kHz	Auto-Recovery	-	ZCD Pin	Intermittent operation	18V/8V	Over voltage protection Latch			
FA5571N											
FA5572N			Timer-latch								
FA5573N			Auto-Recovery	ZCD Pin		Lineary frequency reduction					
FA5574N											
FA5577N			Auto-Recovery	VCC Pin							
FA5640N	11 - 26V	Bottom skip control by on-off width detection	Auto-Recovery	ZCD Pin	Intermittent operation	14V/8V	14V/8V	Min. frequency limitation			
FA5641N											
FA5642N											
FA5643N			Timer-latch			10V/8V		Min. frequency limitation Latch stop function (IS pin)			
FA5644N											
FA5648N			Auto-Recovery					For High SW frequency			

PKG: SOP-8

● Green mode Quasi-resonant ICs

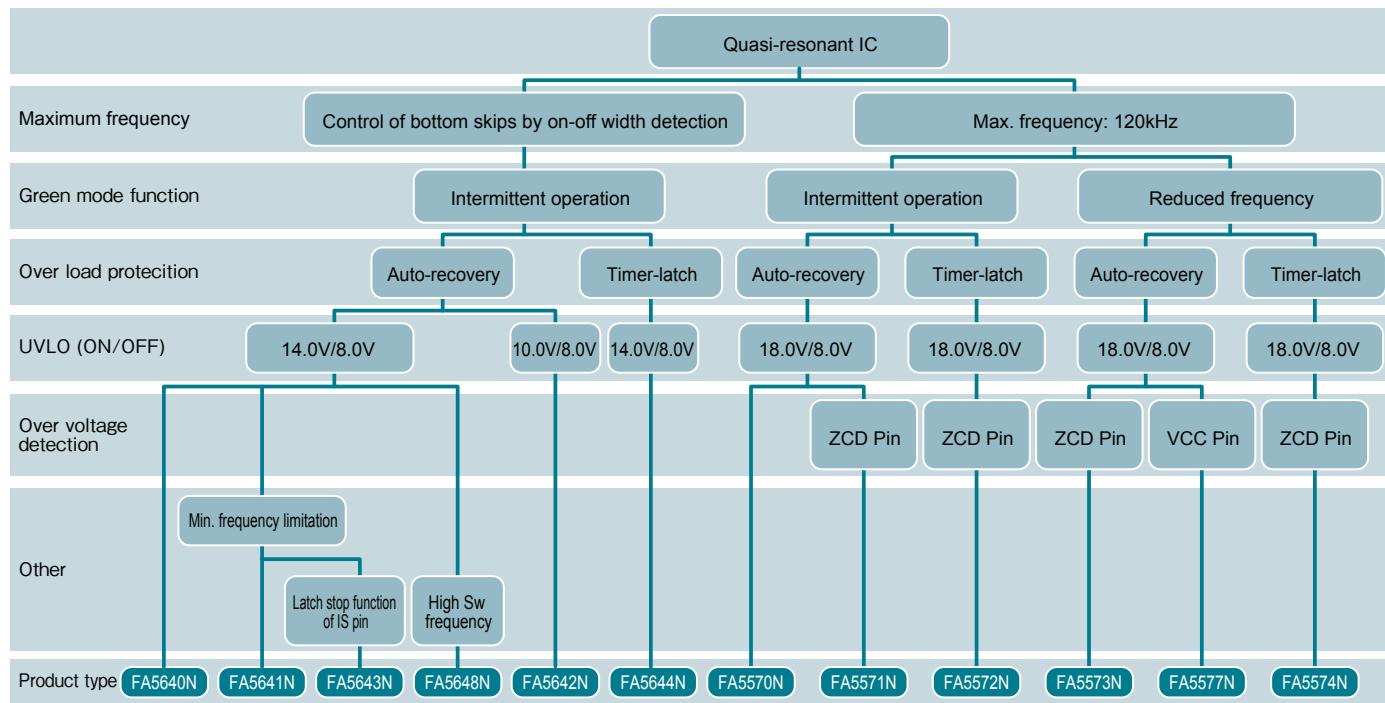

● Block diagram (Main model)

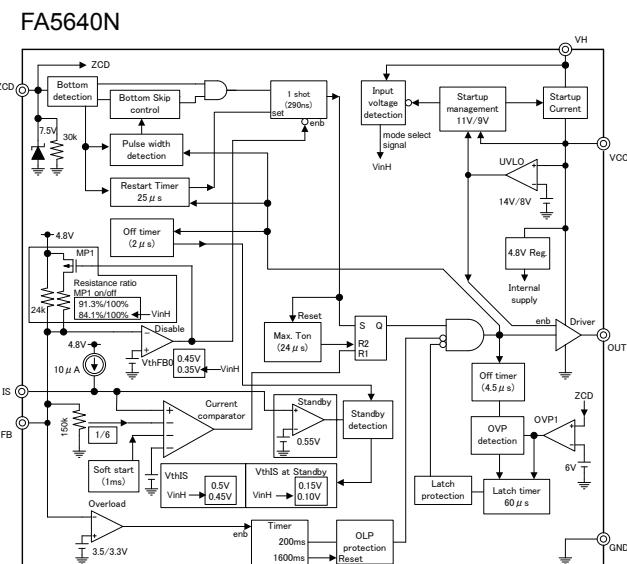
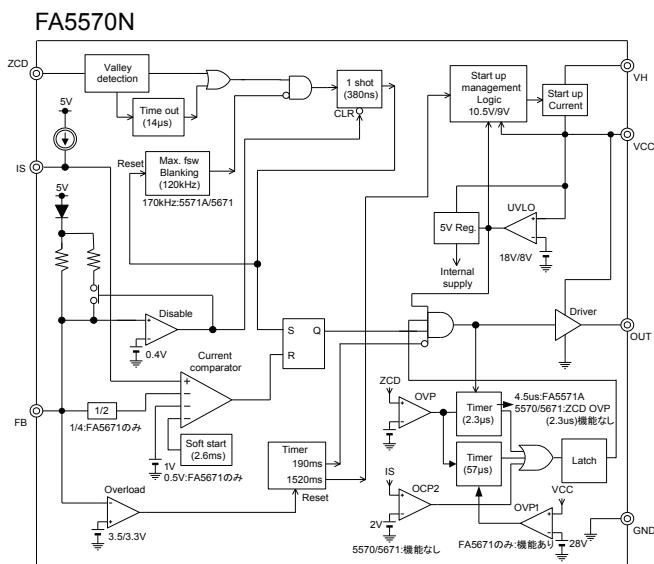


● Power factor correction ICs

Type Name	Input voltage	Duty	Current sense	Under-voltage lockout (ON/OFF)	Frequency	Maximum frequency	Zero Current Detection	FB open short protection	Over voltage protection	Remarks
CRMPFC										
FA5590N				9.6V/9.0V						
FA5591N				13.0V/9.0V						
FA1A10N				9.6V/8.8V						
FA1A11N				12.4V/8.8V						
FA1A50N			Negative	9.6V/8.8V						
FA1A60N	10 - 26V	-		12.5V/7.5V	Self-oscillation					Improve light load efficiency
FA5696N				9.6V/9.0V						
FA1A00N				9.6V/8.8V						
FA1A01N				12.4V/8.8V						
FA5601N			Positive	13.0V/9.0V					Voltage-Limit by Pulse width	
FA1A21N				17.3V/8.8V			Auxiliary-winding	-	Voltage-Limit (Vcc)	For fly Back Over load protection
CCMPFC										
FA5502P/M	10 - 28V			16.5V/8.9V	Adjustable	150kHz		-	Voltage-Limit	
FA5612N				9.6V/9.0V	Choice					
FA5613N	10 - 26V	94%	Negative	13.0V/9.0V	65/60kHz/jitter (50-70kHz)		-			
FA5614N	10 - 26V			9.6V/9.0V	Choice 130/120kHz/jitter (114-144kHz)				Voltage-Limit by Pulse width	
FA5615N				13.0V/9.0V						


PKG: FA5502 "P":DIP16, "M":SOP-16(M), others are 8pin

● Power factor correction ICs

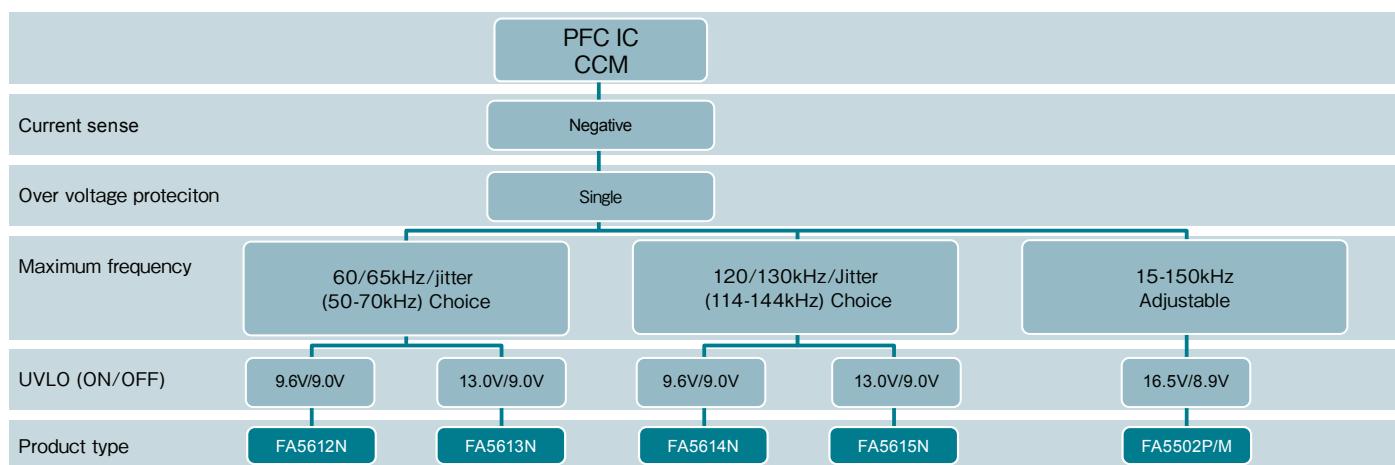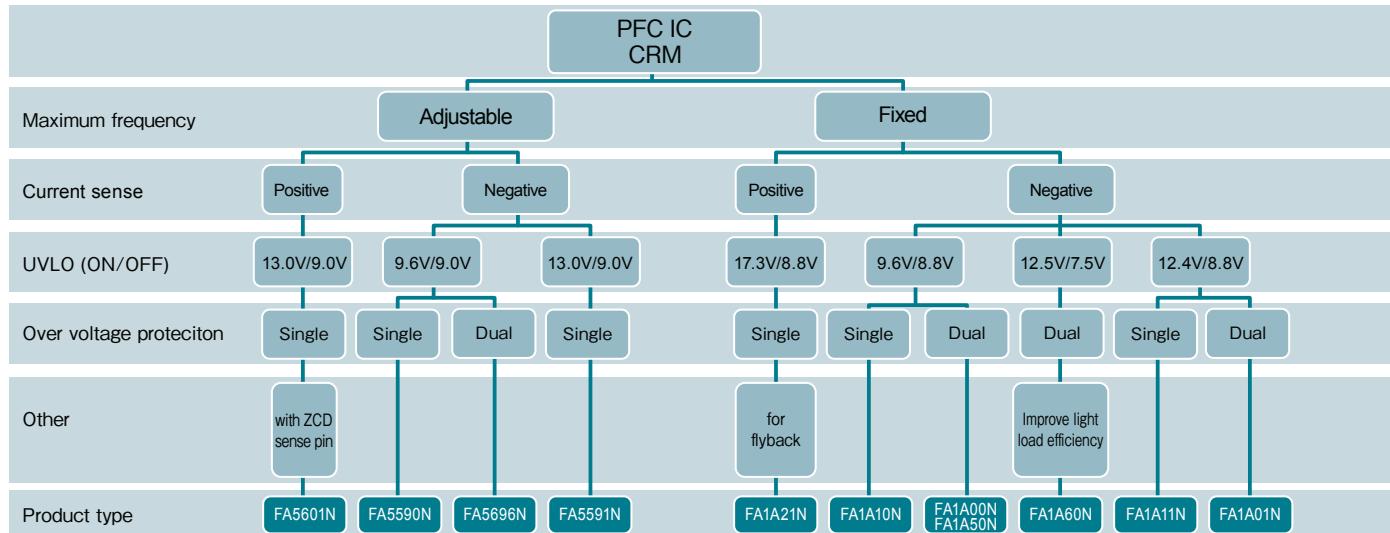


● Block diagram (Main model)

FA5591N

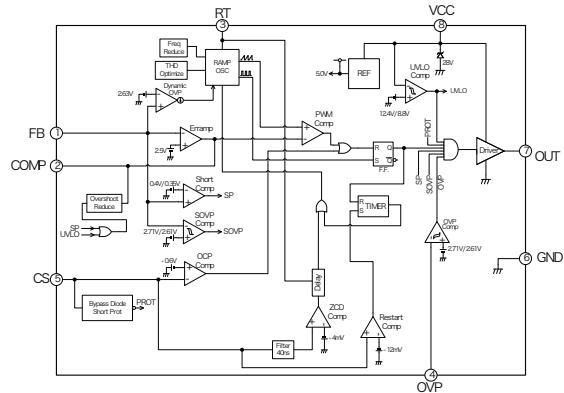

FA5613N, FA5615N

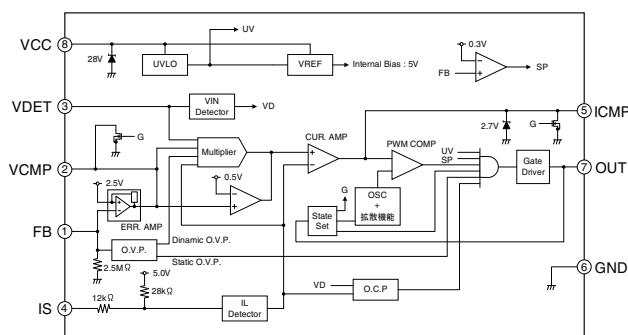


● Current Resonant ICs

Type Name	Control mode	Input voltage	Under-voltage lockout (ON/OFF)	Current sense	Frequency	Maximum frequency	Over load protection	Over voltage protection	Built-in start up circuit	Brown out function	X-Cap discharge function
FA5760N	Voltage mode	10 - 24V	12.0V/8.9V	Positive	Self-oscillation	200kHz	Auto-Recovery	Timer-latch	500V	Fixed	With
FA6A00N						350kHz					
FA6A10N						350kHz					
FA6A11N		14 - 27V	12.0V/9.0V		350kHz	Timer-latch	Auto-Recovery	Auto-Recovery	Adjustable	With	Without
FA6A30N						350kHz					
FA6A31N						Timer-latch					
FA6A19N•		14 - 29V	14.0V/9.0V		450kHz	Auto-Recovery				Fixed	With
FA6B20N						Auto-Recovery	Auto-Recovery	Auto-Recovery			


●: New Products PKG: SOP-16(N)

● Current Resonant ICs

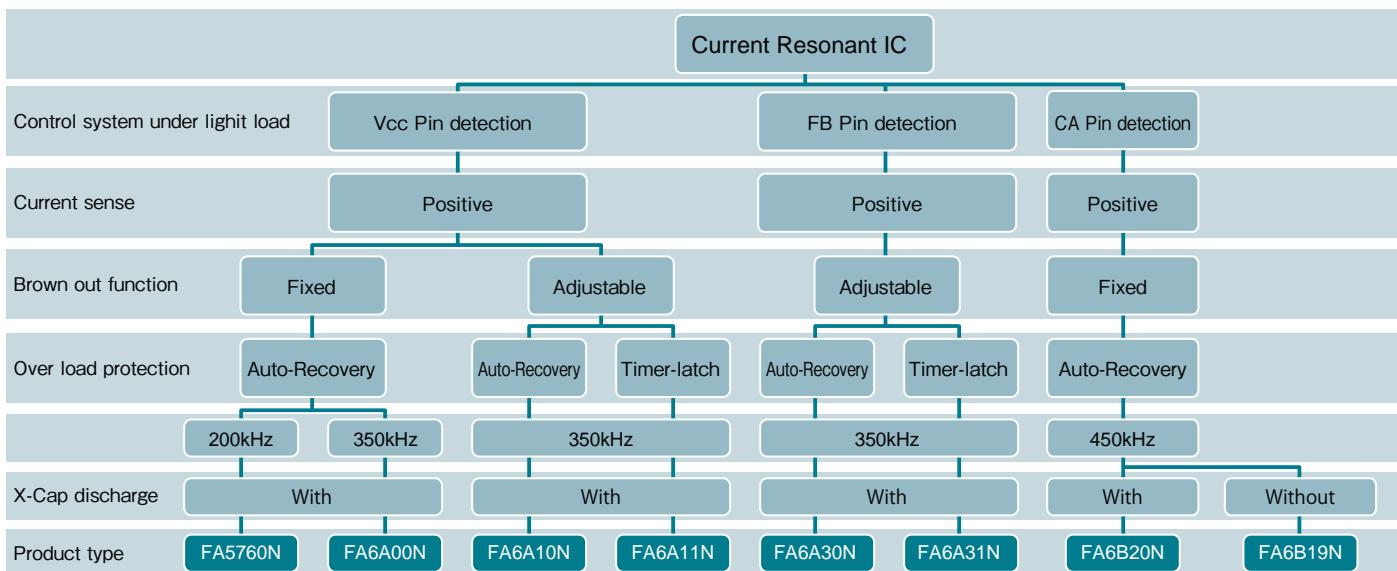


● Block diagram (Main model)

FA5760N

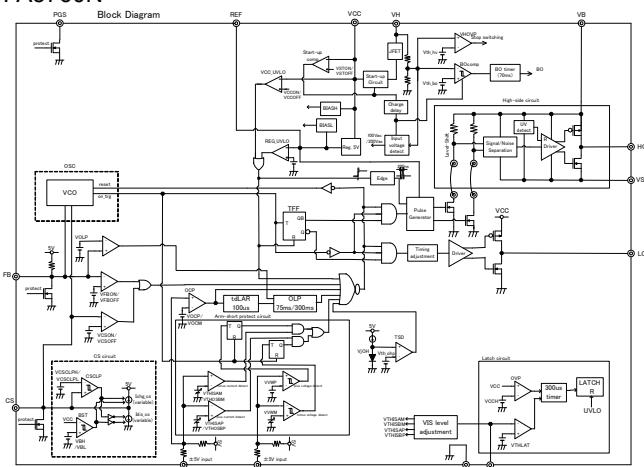


FA6A00N

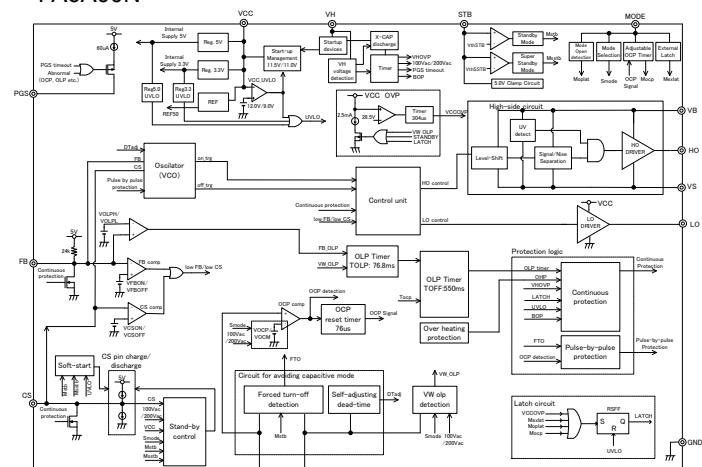

■ High and Low side driver ICs


Type name	Absolute maximum ratings				Electrical characteristics				
	High side floating supply voltage	Maximum supply voltage	Output current source / sink	Maximum input frequency	Logic "1" / "0" Input voltage level (typ.)	Turn-on/off propagation delay time (typ.)	VCC and VBS supply under-voltage threshold (typ.)	Number of Input terminal	Package
FA5650N	830V	30V	-1.4A/1.8A	500kHz	Logic "1" 2.1V Logic "0" 1.1V	125ns	positive going 8.9V negative going 8.2V	2	SOP-8
FA5651N									SOP-16
FA5752N	624V	24V	High side IHO:-0.62A/1.00A Low side ILO:-0.56A/0.91A		Logic "1" 2.1V Logic "0" 1.3V	130ns			SOP-8

● High and Low side driver IC


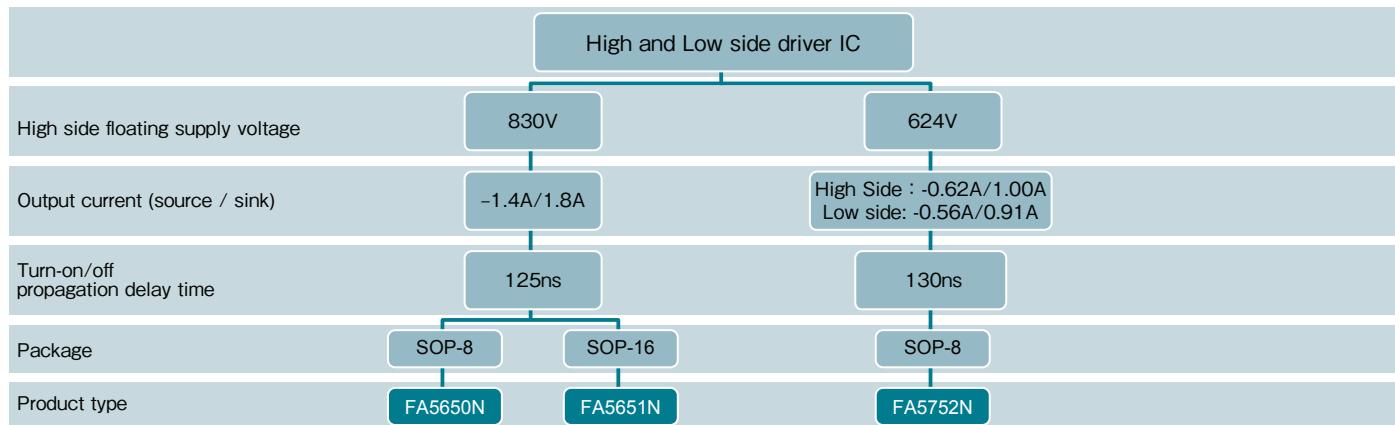


● Block diagram (Main model)

FA5650N

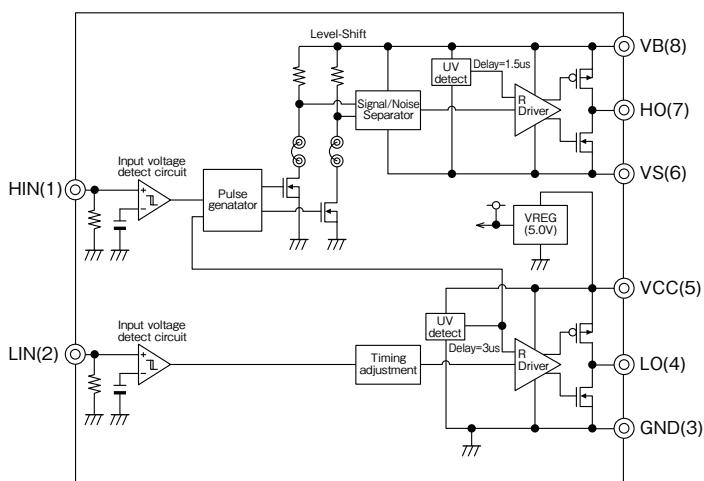

■ Pin Layout




■ DC/DC Power Supply control ICs

● DC/DC Power Supply control ICs


Type Name	Control mode				Output channel	Input voltage	Frequency	Reference Voltage	Operating Ambient Temperature	Output Current	MOSFET Output MOSFET	Package
	Boost	Fly back	Buck	Inverting								
FA7700V	✓	✓			1	2.5 - 18V	50k - 1MHz	0.88V	-30 - +85°C	—	—	TSSOP-8
FA7701V			✓		1	2.5 - 18V	50k - 1MHz	0.88V	-30 - +85°C	—	—	TSSOP-8
FA7703V	✓	✓	✓	✓	2	2.5 - 28V	50k - 1MHz	1.0V	-30 - +85°C	—	—	TSSOP-16
FA3687V	✓	✓	✓	✓	2	2.5 - 18V	300k - 1.5MHz	1.0V	-40 - +85°C	—	—	TSSOP-16
FA7764N/P			✓		1	9 - 45V	30k - 400kHz	1.0V	-20 - +85°C	1.5A	With	N:SOP-8E P:DIP-8

● DC/DC Power Supply control ICs

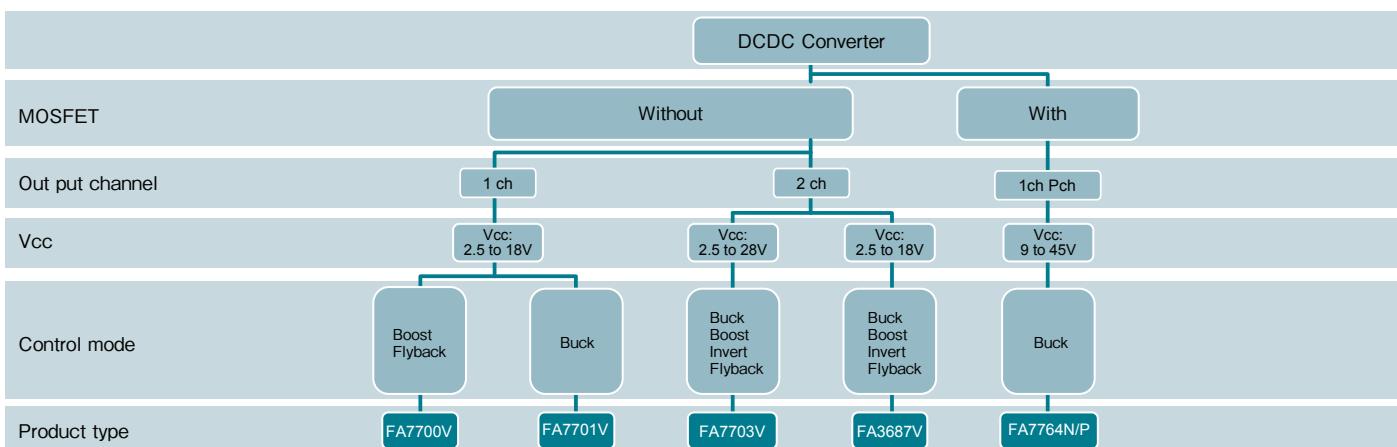

● Block diagram (Main model)

FA7764N/P

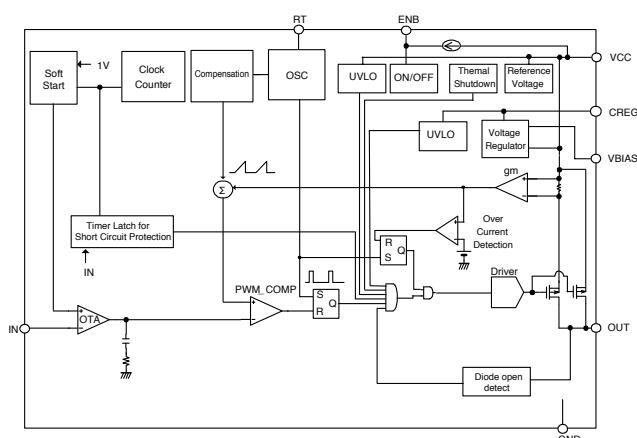




Power MOSFETs

Power MOSFETs



Fuji Electric has a lineup of power MOSFETs ranging from medium to high-voltage types with features such as low power loss, low noise, and low on-resistance. The "Super J-MOS®" Series uses superjunction technology, and was developed primarily for models with a withstand voltage of 600 V.

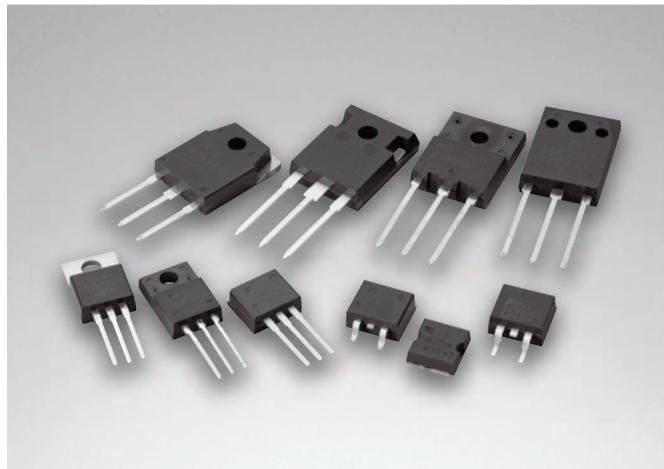

MOSFET Super J MOS® S2 Series

■ Concept

Superjunction technology has much improved trade-off characteristics between On-resistance and Breakdown voltage. Super J MOS® S2 has the same turn-off loss and turn-off dv/dt capabilities at conventional Super J MOS® S1. As a result, it contributes to high efficiency and miniaturization of power supply.


■ Applications

PFC or PWM converter for Server, PC, PCS, UPS, LCD-TV, Lighting and Standard power supply

■ Features & Benefit of Super J MOS® S2 series

Feature	Benefit
Low on-state resistance Low switching loss	→ High efficiency High power density
Low gate charge (Q_G) Low energy stored in output capacitance (E_{oss})	→ High efficiency at low load
Easy to use (more controllable dv/dt by R_G and Low V_{ds} surge)	→ Easy to design
100% avalanche tested	→ High reliability

■ Benefit (Efficiency) of Super J MOS® S2 series

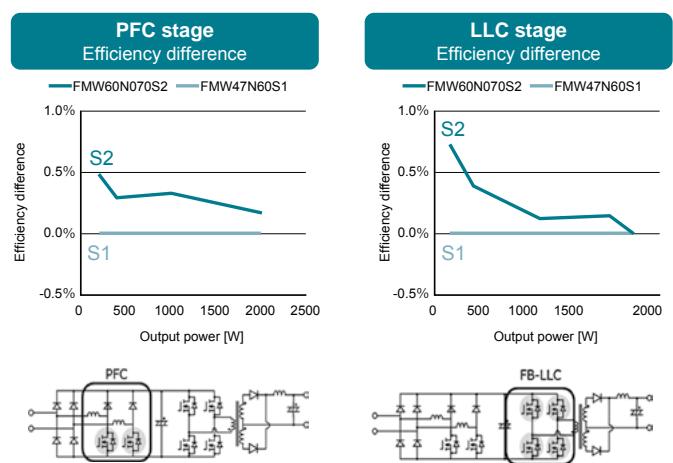


Super J MOS® is registered trademarks of Fuji Electric.

Circuit : PFC+LLC(Exchanged PFC MOS)
Input : 230V AC 50Hz
Output:53.5V/Iout=37A
External RG : 2Ω
Sample : 600V/70mΩ max


Circuit : PFC+LLC(Exchanged LLC MOS)
Input : 230V AC 50Hz
Output : 49V/Iout=6.12~56.01A
External RG : 5.1Ω
Sample : 600V/70mΩ max.

■ Features of Super J MOS® S2 series

- Low $R_{DS(on)} \cdot A$ 25% lower than our conventional MOSFET (Super J MOS® S1)
- Due to low $R_{DS(on)}$, Selectable smaller package
ex) 600V/0.07Ω/TO-3P → 600V/0.07Ω/TO-220F

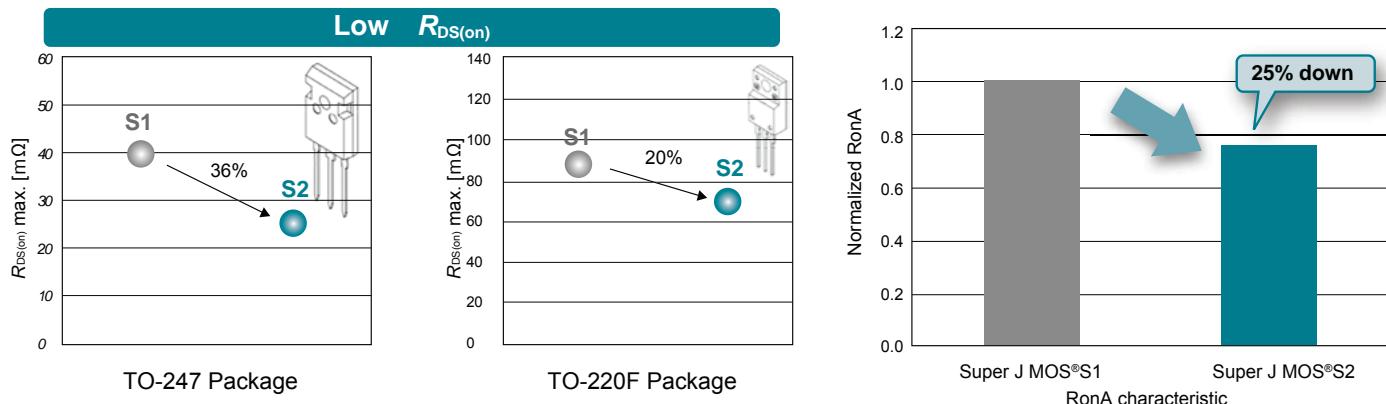

- Low Q_G 30% lower than our conventional MOSFET (Super J MOS® S1)
- Low E_{oss} 30% lower than our conventional MOSFET (Super J MOS® S1)

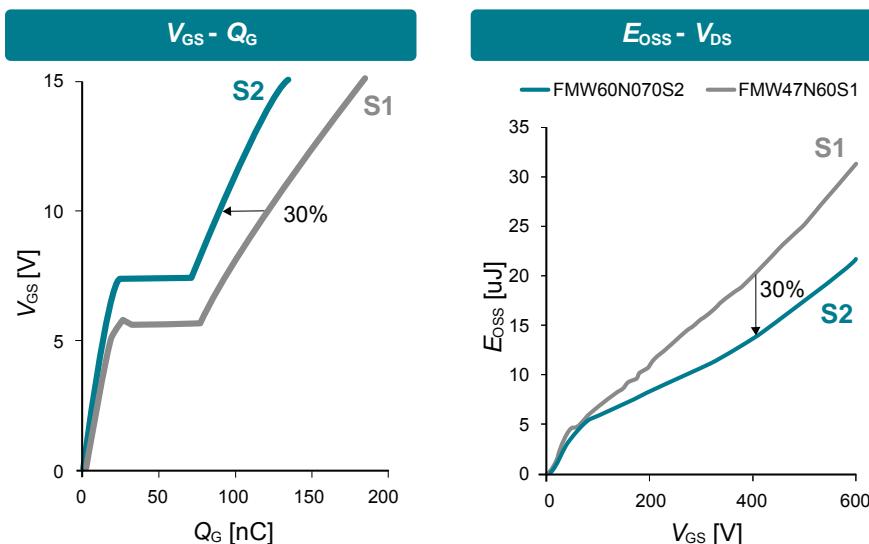


■ Features of Super J MOS® S2FD series

(Built-in FRED type)

- t_{rr} of S2FD is 50% faster than S2
- High diode recovery ruggedness (High $-di_{DR}/dt$ ruggedness)
- Guaranteed avalanche robustness

■ Applications

For resonant switching topologies in applications like UPS, Server, Telecom, LED lighting, Power conditioner system and Power supply.

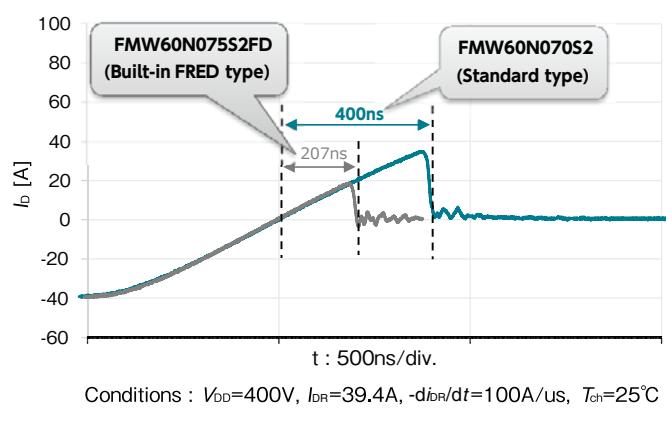


Features of SuperFAP-E³, E^{3S} Series

■ Concept

The second generation Quasi-Planer Junction technology copes with both low loss/noise and usability.



And this technology lets us achieve high performance for power supply's circuit design.

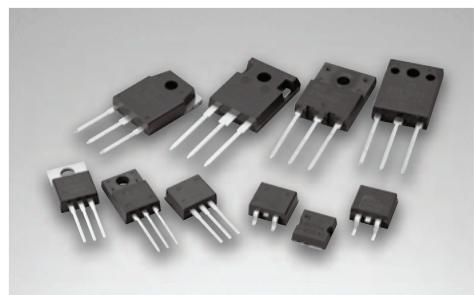

■ Features

- Coping with both low loss and low noise
- Low $R_{DS(on)}$
- High controllability of gate resistance during switching
- Low V_{GS} ringing waveform during switching
- Narrow band of the gate threshold voltage ($3.0 \pm 0.5V$)
- High avalanche durability

Concept

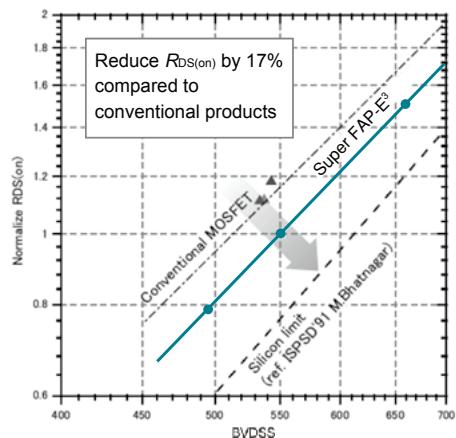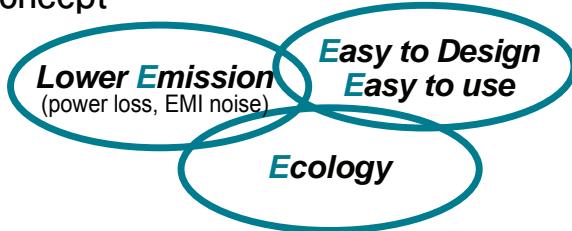


Features of SuperFAP-G Series

The Quasi-Planer Junction technology achieves low $R_{DS(on)}$ and low switching loss (low Q_{GD}).

■ Features

- Low turn off loss 75% lower than our conventional type
- Low Gate charge 60% lower than our conventional type
- High avalanche durability
- Due to low $R_{DS(on)}$, Selectable smaller package
ex) 500V/0.4Ω/TO-3P → 500V/0.38Ω/TO-220

■ Series map

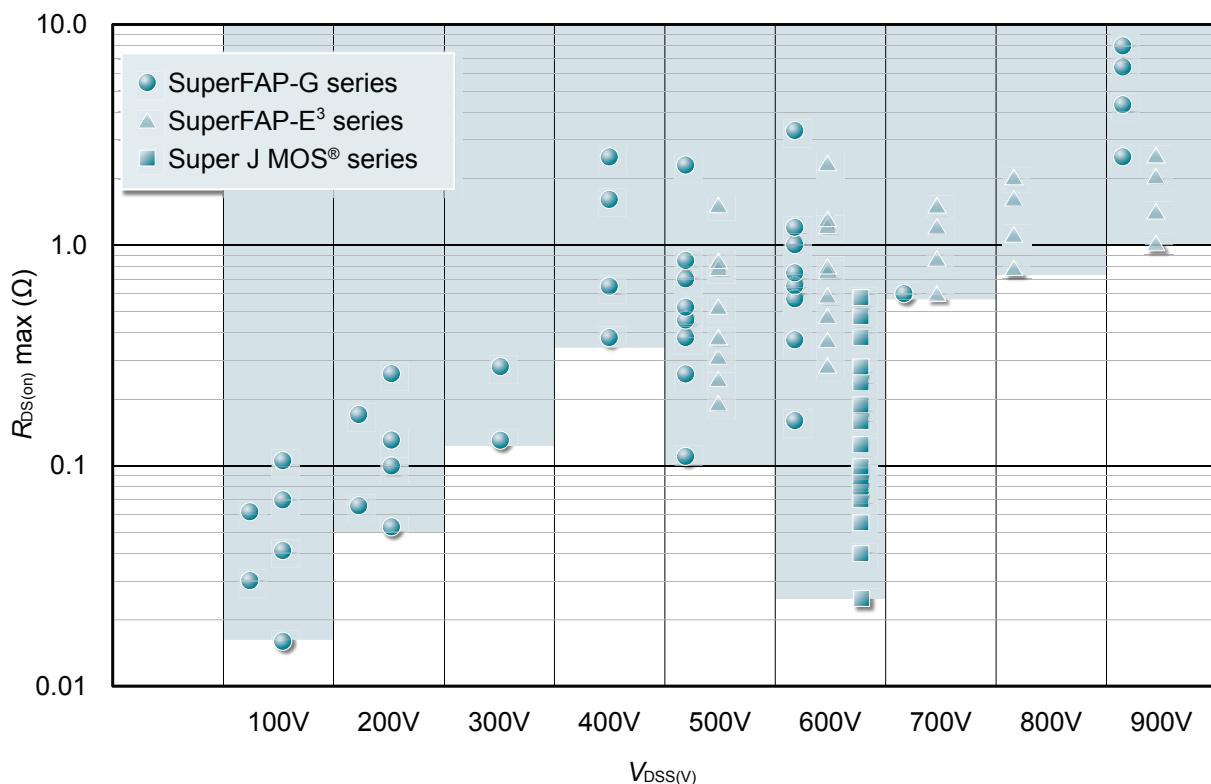

■ Part numbers

FMV20N60S1 (example)

F	M	V		60	N	190	S2	
Company Symbol	Device code	Package code		Voltage	Polarity	Ron(mΩ)	Series	
Fuji	M	MOSFET	C	T-pack (S)	× 1/10	N	N-ch	× 1
			H	TO-3P			S2	Super J MOS® 2nd Gen.
			L	DFN8x8			S2FD	Super J MOS® 2nd Gen. (FRED)
			P	TO-220			S2A	Super J MOS® 2nd Gen. for Automotive
			V	TO-220F (SLS)			S2FDA	Super J MOS® 2nd Gen. (FRED) for Automotive
			Y	TO-247				
			W	TO-247-P2				

FMV60N190S2 (example)

F	M	V		20	N	60	S1	
Company Symbol	Device code	Package code		Current	Polarity	Voltage	Series	
Fuji	M	MOSFET	A	TO-220F	× 1	N	N-ch	× 1/10
			C	T-pack (S)			S1	Super J MOS® 1st Gen.
			H	TO-3P			S1FD	Super J MOS® 1st Gen. (FRED)
			I	T-pack (L)			S1A	Super J MOS® 1st Gen. for Automotive
			P	TO-220			S1FDA	Super J MOS® 1st Gen. (FRED) for Automotive
			R	TO-3PF			E	SuperFAP-E ³
			V	TO-220F (SLS)			ES	SuperFAP-E ^{3S}
			Y	TO-247			G	SuperFAP-G
			W	TO-247-P2			GF	SuperFAP-G (FRED)
							T2	Trench
							R	3G-Trench

Super J MOS® is registered trademarks of Fuji Electric.

■ Super J MOS® S2 series

Low-on resistance, low switching noise and low switching loss

Super J MOS® S2 series			TO-220	TO-220F (SLS)	TO-3P(Q)	TO-247-P2	DFN8x8
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)					
600	0.3800	10.0	✓	✓			
	0.2800	13.0	✓	✓	✓		
	0.2230	19.2					✓
	0.1900	20.0	✓	✓	✓	✓	
	0.1870	22.7					✓
	0.1600	23.9	✓	✓		✓	
	0.1460	28.7					✓
	0.1250	30.1	✓	✓		✓	
	0.1150	37.1					✓
	0.1030	41.3					✓
	0.0990	38.1	✓	✓		✓	
	0.0910	42.3					✓
	0.0880	42.3	✓	✓		✓	
	0.0790	47.9	✓	✓		✓	
	0.0700	53.2		✓		✓	
	0.0550	64.4				✓	
	0.0400	77.5				✓	
	0.0254	95.5				✓	

■ 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max.	P_{tot}	V_{GS}	$V_{GS(th)}$	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
FMP60N380S2	600	10.0	32.4	0.3800	62	30	3.0±0.5	27.5	TO-220	2.0
FMV60N380S2	600	10.0	32.4	0.3800	20	30	3.0±0.5	27.5	TO-220F(SLS)	1.7
FMP60N280S2	600	13.0	41.6	0.2800	75	30	3.0±0.5	33	TO-220	2.0
FMV60N280S2	600	13.0	41.6	0.2800	26	30	3.0±0.5	33	TO-220F(SLS)	1.7
FMH60N280S2	600	13.0	41.6	0.2800	65	30	3.0±0.5	33	TO-3P(Q)	5.0
● FML60N223S2	600	19.2	56.0	0.2230	108	30	4.0±0.5	37	DFN8x8	0.2
FMP60N190S2	600	20.0	62.0	0.1900	113	30	3.0±0.5	46	TO-220	2.0
FMV60N190S2	600	20.0	62.0	0.1900	38	30	3.0±0.5	46	TO-220F(SLS)	1.7
FMH60N190S2	600	20.0	62.0	0.1900	94	30	3.0±0.5	46	TO-3P(Q)	5.0
FMW60N190S2	600	20.0	62.0	0.1900	94	30	3.0±0.5	46	TO-247-P2	6.0
● FML60N187S2	600	22.7	66.0	0.1870	127	30	4.0±0.5	43	DFN8x8	0.2
FMP60N160S2	600	23.9	71.6	0.1600	127	30	4.0±0.5	43	TO-220	2.0
FMV60N160S2	600	23.9	71.6	0.1600	45	30	4.0±0.5	43	TO-220F(SLS)	1.7
FMW60N160S2	600	23.9	71.6	0.1600	110	30	4.0±0.5	43	TO-247-P2	6.0
● FML60N146S2	600	28.7	83.6	0.1460	159	30	4.0±0.5	53	DFN8x8	0.2
FMP60N125S2	600	30.1	90.8	0.1250	160	30	4.0±0.5	53	TO-220	2.0
FMV60N125S2	600	30.1	90.8	0.1250	57	30	4.0±0.5	53	TO-220F(SLS)	1.7
FMW60N125S2	600	30.1	90.8	0.1250	140	30	4.0±0.5	53	TO-247-P2	6.0
● FML60N115S2	600	37.1	108.0	0.1150	208	30	4.0±0.5	65	DFN8x8	0.2
● FML60N103S2	600	41.3	120.4	0.1030	232	30	4.0±0.5	72	DFN8x8	0.2
FMP60N099S2	600	38.1	117.0	0.0990	210	30	4.0±0.5	65	TO-220	2.0
FMV60N099S2	600	38.1	117.0	0.0990	75	30	4.0±0.5	65	TO-220F(SLS)	1.7
FMW60N099S2	600	38.1	117.0	0.0990	185	30	4.0±0.5	65	TO-247-P2	6.0
● FML60N091S2	600	42.3	125.6	0.0910	263	30	4.0±0.5	80	DFN8x8	0.2

● : New Products

Super J MOS® is registered trademarks of Fuji Electric

Letter symbols

V_{DSS} : Drain-source voltage

I_D : Continuous drain current

I_D (pulse): Pulsed drain current

$R_{DS(on)}$: Drain-source on-state resistance

P_{tot} : Maximum power dissipation

V_{GS} : Gate-source voltage

$V_{GS(th)}$: Gate threshold voltage

Q_G : Total gate charge

The Super J MOS® series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.

Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ 600V class

Device type	V_{DSS} Volts	I_D Amps.	I_D (pulse) Amps.	$R_{DS\ (on)}$ max. Ohms	P_{tot} Watts	V_{GS} Volts	$V_{GS\ (th)}$ Volts	Q_G typ. nC	Package	Net mass Grams
FMP60N088S2	600	42.3	131	0.0880	235	30	4.0±0.5	72	TO-220	2.0
FMV60N088S2	600	42.3	131	0.0880	85	30	4.0±0.5	72	TO-220F(SLS)	1.7
FMW60N088S2	600	42.3	131	0.0880	205	30	4.0±0.5	72	TO-247-P2	6.0
FMP60N079S2	600	47.9	148	0.0790	270	30	4.0±0.5	80	TO-220	2.0
FMV60N079S2	600	47.9	148	0.0790	95	30	4.0±0.5	80	TO-220F(SLS)	1.7
FMW60N079S2	600	47.9	148	0.0790	235	30	4.0±0.5	80	TO-247-P2	6.0
FMV60N070S2	600	53.2	158	0.0700	110	30	4.0±0.5	90	TO-220F(SLS)	1.7
FMW60N070S2	600	53.2	158	0.0700	270	30	4.0±0.5	90	TO-247-P2	6.0
FMW60N055S2	600	64.4	200	0.0550	340	30	4.0±0.5	110	TO-247-P2	6.0
FMW60N040S2	600	77.5	265	0.0400	435	30	4.0±0.5	147	TO-247-P2	6.0
FMW60N025S2	600	95.5	286.5	0.0254	575	30	4.0±0.5	222	TO-247-P2	6.0

Super J MOS® is registered trademarks of Fuji Electric.

The Super J MOS® series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Super J MOS® S2FD series (Built-in FRED type)

Low-on resistance, low switching noise and low switching loss

Super J MOS® S2FD Series (Built-in FRED type)			TO-220	TO-220F (SLS)	TO-247-P2	DFN8x8
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A)				
600	0.191	22.7				✓
	0.170	23.9	✓	✓	✓	
	0.150	28.7				✓
	0.133	30.1	✓	✓	✓	
	0.118	37.1				✓
	0.105	38.1	✓	✓	✓	
	0.104	41.3				✓
	0.094	42.3	✓	✓	✓	
	0.093	42.3				✓
	0.084	47.9	✓	✓	✓	
	0.075	53.2		✓	✓	
	0.059	64.4			✓	
	0.043	77.5			✓	
	0.027	95.5			✓	

■ 600V class

Device type	V _{DSS} Volts	I _D Amps.	I _D (pulse) Amps.	R _{DS(on)} max. Ohms	P _{tot} Watts	V _{GS} Volts	V _{GS(th)} Volts	Q _G typ. nC	t _{rf} typ. ns	Package	Net mass Grams
● FML60N191S2FD	600	22.7	66	0.191	127	30	4.0±1.0	48	150	DFN8x8	0.2
FMP60N170S2FD	600	23.9	71.6	0.170	127	30	4.0±1.0	48	150	TO-220	2.0
FMV60N170S2FD	600	23.9	71.6	0.170	45	30	4.0±1.0	48	150	TO-220F(SLS)	1.7
FMW60N170S2FD	600	23.9	71.6	0.170	110	30	4.0±1.0	48	150	TO-247-P2	6.0
● FML60N150S2FD	600	28.7	83.6	0.150	159	30	4.0±1.0	59	160	DFN8x8	0.2
FMP60N133S2FD	600	30.1	90.8	0.133	160	30	4.0±1.0	59	160	TO-220	2.0
FMV60N133S2FD	600	30.1	90.8	0.133	57	30	4.0±1.0	59	160	TO-220F(SLS)	1.7
FMW60N133S2FD	600	30.1	90.8	0.133	140	30	4.0±1.0	59	160	TO-247-P2	6.0
● FML60N118S2FD	600	37.1	108	0.118	208	30	4.0±1.0	75	174	DFN8x8	0.2
FMP60N105S2FD	600	38.1	117	0.105	210	30	4.0±1.0	75	174	TO-220	2.0
FMV60N105S2FD	600	38.1	117	0.105	75	30	4.0±1.0	75	174	TO-220F(SLS)	1.7
FMW60N105S2FD	600	38.1	117	0.105	185	30	4.0±1.0	75	174	TO-247-P2	6.0
● FML60N104S2FD	600	41.3	121.6	0.104	232	30	4.0±1.0	83	185	DFN8x8	0.2
FMP60N094S2FD	600	42.3	131	0.094	235	30	4.0±1.0	83	185	TO-220	2.0
FMV60N094S2FD	600	42.3	131	0.094	85	30	4.0±1.0	83	185	TO-220F(SLS)	1.7
FMW60N094S2FD	600	42.3	131	0.094	205	30	4.0±1.0	83	185	TO-247-P2	6.0
● FML60N093S2FD	600	42.3	125.6	0.093	263	30	4.0±1.0	93	190	DFN8x8	0.2
FMP60N084S2FD	600	47.9	148	0.084	270	30	4.0±1.0	93	190	TO-220	2.0
FMV60N084S2FD	600	47.9	148	0.084	95	30	4.0±1.0	93	190	TO-220F(SLS)	1.7
FMW60N084S2FD	600	47.9	148	0.084	235	30	4.0±1.0	93	190	TO-247-P2	6.0
FMV60N075S2FD	600	53.2	158	0.075	110	30	4.0±1.0	97	207	TO-220F(SLS)	1.7
FMW60N075S2FD	600	53.2	158	0.075	270	30	4.0±1.0	97	207	TO-247-P2	6.0
FMW60N059S2FD	600	64.4	200	0.059	340	30	4.0±1.0	129	215	TO-247-P2	6.0
FMW60N043S2FD	600	77.5	265	0.043	435	30	4.0±1.0	177	250	TO-247-P2	6.0
FMW60N027S2FD	600	95.5	286.5	0.027	575	30	4.0±1.0	256	288	TO-247-P2	6.0

●: New Product

Super J MOS® is registered trademarks of Fuji Electric.

The Super J MOS® series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Super J MOS® S1 series

Low-on resistance, low switching noise and low switching loss

Super J MOS® S1 series			TO-220	TO-220F (SLS)	TO-3P(Q)	TO-247-P2
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A)				
600	0.580	6.5	✓	✓		
	0.470	8	✓	✓		
	0.380	10	✓	✓		
	0.280	13	✓	✓		
	0.230	15	✓	✓	✓	✓
	0.190	20	✓	✓	✓	✓
	0.160	22	✓	✓	✓	✓
	0.125	30	✓	✓	✓	✓
	0.099	35		✓	✓	✓
	0.088	40		✓	✓	✓
	0.070	47			✓	✓
	0.055	57				✓
	0.040	68				✓

■ 600V class

Device type	V _{DSS}	I _D	I _D (pulse)	R _{DS(on)} max.	P _{tot}	V _{GS}	V _{GS(th)}	Q _G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
FMP07N60S1	600	6.5	19.5	0.580	60	30	3±0.5	21	TO-220	2.0
FMV07N60S1	600	6.5	19.5	0.580	21	30	3±0.5	21	TO-220F(SLS)	1.7
FMP08N60S1	600	8	24	0.470	70	30	3±0.5	25	TO-220	2.0
FMV08N60S1	600	8	24	0.470	25	30	3±0.5	25	TO-220F(SLS)	1.7
FMP10N60S1	600	10	30	0.380	90	30	3±0.5	28	TO-220	2.0
FMV10N60S1	600	10	30	0.380	32	30	3±0.5	28	TO-220F(SLS)	1.7
FMP13N60S1	600	13	39	0.280	120	30	3±0.5	35	TO-220	2.0
FMV13N60S1	600	13	39	0.280	43	30	3±0.5	35	TO-220F(SLS)	1.7
FMH13N60S1	600	13	39	0.280	105	30	3±0.5	35	TO-3P(Q)	5.0
FMP15N60S1	600	15	45	0.230	135	30	3±0.5	43	TO-220	2.0
FMV15N60S1	600	15	45	0.230	48	30	3±0.5	43	TO-220F(SLS)	1.7
FMH15N60S1	600	15	45	0.230	115	30	3±0.5	43	TO-3P(Q)	5.0
FMW15N60S1	600	15	45	0.230	115	30	3±0.5	43	TO-247-P2	6.0
FMP20N60S1	600	20	60	0.190	150	30	3±0.5	48	TO-220	2.0
FMV20N60S1	600	20	60	0.190	60	30	3±0.5	48	TO-220F(SLS)	1.7
FMH20N60S1	600	20	60	0.190	130	30	3±0.5	48	TO-3P(Q)	5.0
FMW20N60S1	600	20	60	0.190	130	30	3±0.5	48	TO-247-P2	6.0
FMP22N60S1	600	22	66	0.160	195	30	3±0.5	57	TO-220	2.0
FMV22N60S1	600	22	66	0.160	70	30	3±0.5	57	TO-220F(SLS)	1.7
FMH22N60S1	600	22	66	0.160	170	30	3±0.5	57	TO-3P(Q)	5.0
FMW22N60S1	600	22	66	0.160	170	30	3±0.5	57	TO-247-P2	6.0
FMP30N60S1	600	30	90	0.125	250	30	3±0.5	73	TO-220	2.0
FMV30N60S1	600	30	90	0.125	90	30	3±0.5	73	TO-220F(SLS)	1.7
FMH30N60S1	600	30	90	0.125	220	30	3±0.5	73	TO-3P(Q)	5.0
FMW30N60S1	600	30	90	0.125	220	30	3±0.5	73	TO-247-P2	6.0
FMV35N60S1	600	35	105	0.099	110	30	3±0.5	87	TO-220F(SLS)	1.7
FMH35N60S1	600	35	105	0.099	270	30	3±0.5	87	TO-3P(Q)	5.0
FMW35N60S1	600	35	105	0.099	270	30	3±0.5	87	TO-247-P2	6.0
FMV40N60S1	600	40	120	0.088	130	30	3±0.5	100	TO-220F(SLS)	1.7
FMH40N60S1	600	40	120	0.088	315	30	3±0.5	100	TO-3P(Q)	5.0
FMW40N60S1	600	40	120	0.088	315	30	3±0.5	100	TO-247-P2	6.0
FMH47N60S1	600	47	141	0.070	390	30	3±0.5	125	TO-3P(Q)	5.0
FMW47N60S1	600	47	141	0.070	390	30	3±0.5	125	TO-247-P2	6.0
FMW57N60S1	600	57	171	0.055	445	30	3±0.5	153	TO-247-P2	6.0
FMW79N60S1	600	68	204	0.040	545	30	3±0.5	203	TO-247-P2	6.0

Super J MOS® is registered trademarks of Fuji Electric.

The Super J MOS® series products satisfies the quality assurance level of general consumer use.
If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Super J MOS® S1FD series (Built-in FRED type)

Low-on resistance, low switching noise and low switching loss

Super J MOS® S1FD series (Built-in FRED type)			TO-220	TO-220F (SLS)	TO-3P(Q)	TO-247-P2
						
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A)				
600	0.200	20	✓	✓	✓	✓
	0.170	22	✓	✓	✓	✓
	0.132	30	✓	✓	✓	✓
	0.105	35		✓	✓	✓
	0.093	40			✓	✓
	0.074	47			✓	✓
	0.058	57				✓
	0.042	68				✓

■ 600V class

Device type	V _{DSS}	I _D	I _D (pulse)	R _{DS(on)} max.	P _{tot}	V _{GS}	V _{GS(th)}	Q _G typ.	t _{tr} typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC	ns		Grams
FMP20N60S1FD	600	20	60	0.200	150	30	4.0±1.0	52	150	TO-220	2.0
FMV20N60S1FD	600	20	60	0.200	60	30	4.0±1.0	52	150	TO-220F(SLS)	1.7
FMH20N60S1FD	600	20	60	0.200	130	30	4.0±1.0	52	150	TO-3P(Q)	5.0
FMW20N60S1FD	600	20	60	0.200	130	30	4.0±1.0	52	150	TO-247-P2	6.0
FMP22N60S1FD	600	22	66	0.170	195	30	4.0±1.0	58	165	TO-220	2.0
FMV22N60S1FD	600	22	66	0.170	70	30	4.0±1.0	58	165	TO-220F(SLS)	1.7
FMH22N60S1FD	600	22	66	0.170	170	30	4.0±1.0	58	165	TO-3P(Q)	5.0
FMW22N60S1FD	600	22	66	0.170	170	30	4.0±1.0	58	165	TO-247-P2	6.0
FMP30N60S1FD	600	30	90	0.132	250	30	4.0±1.0	73	180	TO-220	2.0
FMV30N60S1FD	600	30	90	0.132	90	30	4.0±1.0	73	180	TO-220F(SLS)	1.7
FMH30N60S1FD	600	30	90	0.132	220	30	4.0±1.0	73	180	TO-3P(Q)	5.0
FMW30N60S1FD	600	30	90	0.132	220	30	4.0±1.0	73	180	TO-247-P2	6.0
FMV35N60S1FD	600	35	105	0.105	110	30	4.0±1.0	92	185	TO-220F(SLS)	1.7
FMH35N60S1FD	600	35	105	0.105	270	30	4.0±1.0	92	185	TO-3P(Q)	5.0
FMW35N60S1FD	600	35	105	0.105	270	30	4.0±1.0	92	185	TO-247-P2	6.0
FMH40N60S1FD	600	40	120	0.093	315	30	4.0±1.0	104	200	TO-3P(Q)	5.0
FMW40N60S1FD	600	40	120	0.093	315	30	4.0±1.0	104	200	TO-247-P2	6.0
FMH47N60S1FD	600	47	141	0.074	390	30	4.0±1.0	127	210	TO-3P(Q)	5.0
FMW47N60S1FD	600	47	141	0.074	390	30	4.0±1.0	127	210	TO-247-P2	6.0
FMW57N60S1FD	600	68	171	0.058	445	30	4.0±1.0	158	220	TO-247-P2	6.0
FMW79N60S1FD	600	68	204	0.042	545	30	4.0±1.0	209	230	TO-247-P2	6.0

Super J MOS® is registered trademarks of Fuji Electric.

The Super J MOS® series products satisfies the quality assurance level of general consumer use.
If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ SuperFAP-E³ series

Low-on resistance and low switching noise

SuperFAP-E ³ series			TO-220	TO-220 (SLS)	TO-3P (Q)	TO-3PF	T-Pack(L)	T-Pack(S)
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)						
500	1.5	5	✓	✓			✓	✓
	0.85	6.5	✓	✓			✓	✓
	0.79	7.5	✓	✓				
	0.52	12	✓	✓			✓	✓
	0.38	16	✓	✓	✓		✓	✓
	0.31	20	✓	✓	✓		✓	✓
	0.245	23		✓	✓	✓		
	0.19	28			✓	✓		
600	2.3	3	✓	✓			✓	✓
	1.3	6	✓	✓			✓	✓
	1.2	6	✓	✓				
	0.79	10	✓	✓			✓	✓
	0.75	11	✓	✓			✓	✓
	0.58	13	✓	✓			✓	✓
	0.47	16	✓	✓			✓	✓
	0.365	19		✓	✓	✓		
	0.28	23			✓	✓		
650	1.47	7		✓				
	0.97	9		✓				
700	1.5	7		✓	✓			
	1.2	9		✓	✓			
	0.85	11		✓	✓			
	0.59	15		✓				
800	2	6		✓	✓		✓	✓
	1.6	8		✓	✓		✓	✓
	1.1	10		✓	✓			
	0.78	13		✓	✓			
900	2.5	6		✓	✓		✓	✓
	2	7		✓	✓		✓	✓
	1.4	9		✓	✓			
	1	11		✓	✓		✓	

■ SuperFAP-E³ series

■ 500V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	max. Ohms	Watts	Volts	Volts	nC		
FMP05N50E	500	5	20	1.5	60	30	3±0.5	21	TO-220	2.0
FMV05N50E	500	5	20	1.5	21	30	3±0.5	21	TO-220F(SLS)	1.7
FMI05N50E	500	5	20	1.5	60	30	3±0.5	21	T-Pack(L)	1.6
FMC05N50E	500	5	20	1.5	60	30	3±0.5	21	T-Pack(S)	1.6
FMP07N50E	500	6.5	26	0.85	90	30	3±0.5	32	TO-220	2.0
FMV07N50E	500	6.5	26	0.85	32	30	3±0.5	32	TO-220F(SLS)	1.7
FMI07N50E	500	6.5	26	0.85	90	30	3±0.5	32	T-Pack(L)	1.6
FMC07N50E	500	6.5	26	0.85	90	30	3±0.5	32	T-Pack(S)	1.6
FMP08N50E	500	7.5	30	0.79	105	30	3±0.5	35	TO-220	2.0
FMV08N50E	500	7.5	30	0.79	37	30	3±0.5	35	TO-220F(SLS)	1.7
FMP12N50E	500	12	48	0.52	165	30	3±0.5	60	TO-220	2.0
FMV12N50E	500	12	48	0.52	60	30	3±0.5	60	TO-220F(SLS)	1.7
FMI12N50E	500	12	48	0.52	165	30	3±0.5	60	T-Pack(L)	1.6
FMC12N50E	500	12	48	0.52	165	30	3±0.5	60	T-Pack(S)	1.6
FMP16N50E	500	16	64	0.38	225	30	3±0.5	60	TO-220	2.0
FMV16N50E	500	16	64	0.38	80	30	3±0.5	60	TO-220F(SLS)	1.7
FMI16N50E	500	16	64	0.38	225	30	3±0.5	60	T-Pack(L)	1.6
FMC16N50E	500	16	64	0.38	225	30	3±0.5	60	T-Pack(S)	1.6
FMH16N50E	500	16	64	0.38	195	30	3±0.5	60	TO-3P(Q)	5.1
FMP20N50E	500	20	80	0.31	270	30	3±0.5	77	TO-220	2.0
FMV20N50E	500	20	80	0.31	95	30	3±0.5	77	TO-220F(SLS)	1.7
FMI20N50E	500	20	80	0.31	270	30	3±0.5	77	T-Pack(L)	1.6
FMC20N50E	500	20	80	0.31	270	30	3±0.5	77	T-Pack(S)	1.6
FMH20N50E	500	20	80	0.31	235	30	3±0.5	77	TO-3P(Q)	5.1
FMV23N50E	500	23	92	0.245	130	30	3±0.5	93	TO-220F(SLS)	1.7
FMH23N50E	500	23	92	0.245	315	30	3±0.5	93	TO-3P(Q)	5.1
FMR23N50E	500	23	92	0.245	150	30	3±0.5	93	TO-3PF	6.0
FMH28N50E	500	28	112	0.19	400	30	3±0.5	130	TO-3P(Q)	5.1
FMR28N50E	500	28	112	0.19	200	30	3±0.5	130	TO-3PF	6.0

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_c=25^\circ C$

The SuperFAP-E³ series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ SuperFAP-E³ series

■ 600 – 800V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. ^{*1}	P_{tot} ^{*2}	V_{GS}	$V_{GS(th)}$	Q_G typ. nC	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts			Grams
FMP03N60E	600	3	12	2.3	60	30	3±0.5	21.5	TO-220	2.0
FMV03N60E	600	3	12	2.3	21	30	3±0.5	21.5	TO-220F(SLS)	1.7
FMI03N60E	600	3	12	2.3	60	30	3±0.5	21.5	T-Pack(L)	1.6
FMC03N60E	600	3	12	2.3	60	30	3±0.5	21.5	T-Pack(S)	1.6
FMP05N60E	600	5.5	22	1.3	90	30	3±0.5	33	TO-220	2.0
FMV05N60E	600	5.5	22	1.3	32	30	3±0.5	33	TO-220F(SLS)	1.7
FMI05N60E	600	5.5	22	1.3	90	30	3±0.5	33	T-Pack(L)	1.6
FMC05N60E	600	5.5	22	1.3	90	30	3±0.5	33	T-Pack(S)	1.6
FMP06N60E	600	6	24	1.2	105	30	3±0.5	35	TO-220	2.0
FMV06N60E	600	6	24	1.2	37	30	3±0.5	35	TO-220F(SLS)	1.7
FMP10N60E	600	10	40	0.79	165	30	3±0.5	47	TO-220	2.0
FMV10N60E	600	10	40	0.79	60	30	3±0.5	47	TO-220F(SLS)	1.7
FMI10N60E	600	10	40	0.79	165	30	3±0.5	47	T-Pack(L)	1.6
FMC10N60E	600	10	40	0.79	165	30	3±0.5	47	T-Pack(S)	1.6
FMP11N60E	600	11	44	0.75	180	30	3±0.5	48.5	TO-220	2.0
FMV11N60E	600	11	44	0.75	65	30	3±0.5	48.5	TO-220F(SLS)	1.7
FMI11N60E	600	11	44	0.75	180	30	3±0.5	48.5	T-Pack(L)	1.6
FMC11N60E	600	11	44	0.75	180	30	3±0.5	48.5	T-Pack(S)	1.6
FMP13N60E	600	13	52	0.58	225	30	3±0.5	60	TO-220	2.0
FMV13N60E	600	13	52	0.58	80	30	3±0.5	60	TO-220F(SLS)	1.7
FMI13N60E	600	13	52	0.58	225	30	3±0.5	60	T-Pack(L)	1.6
FMC13N60E	600	13	52	0.58	225	30	3±0.5	60	T-Pack(S)	1.6
FMP16N60E	600	16	64	0.47	270	30	3±0.5	76	TO-220	2.0
FMV16N60E	600	16	64	0.47	95	30	3±0.5	76	TO-220F(SLS)	1.7
FMI16N60E	600	16	64	0.47	270	30	3±0.5	76	T-Pack(L)	1.6
FMC16N60E	600	16	64	0.47	270	30	3±0.5	76	T-Pack(S)	1.6
FMV19N60E	600	19	76	0.365	130	30	3±0.5	105	TO-220F(SLS)	1.7
FMH19N60E	600	19	76	0.365	315	30	3±0.5	105	TO-3P(Q)	5.1
FMR19N60E	600	19	76	0.365	150	30	3±0.5	105	TO-3PF	6.0
FMH23N60E	600	23	92	0.28	400	30	3±0.5	130	TO-3P(Q)	5.1
FMR23N60E	600	23	92	0.28	200	30	3±0.5	130	TO-3PF	6.0
FMV07N65E	650	7	28	1.47	37	30	3±0.5	35	TO-220F(SLS)	1.7
FMV09N65E	650	9	36	0.97	60	30	3±0.5	47	TO-220F(SLS)	1.7
FMV07N70E	700	7	28	1.5	48	30	4±0.5	32	TO-220F(SLS)	1.7
FMH07N70E	700	7	28	1.5	115	30	4±0.5	32	TO-3P(Q)	5.1
FMV09N70E	700	9	36	1.2	60	30	4±0.5	38	TO-220F(SLS)	1.7
FMH09N70E	700	9	36	1.2	145	30	4±0.5	38	TO-3P(Q)	5.1
FMV11N70E	700	11	44	0.85	85	30	4±0.5	50	TO-220F(SLS)	1.7
FMH11N70E	700	11	44	0.85	205	30	4±0.5	50	TO-3P(Q)	5.1
FMV15N70E	700	15	60	0.59	120	30	4±0.5	66	TO-220F(SLS)	1.7
FMV06N80E	800	6	24	2.0	48	30	4±0.5	32	TO-220F(SLS)	1.7
FMH06N80E	800	6	24	2.0	115	30	4±0.5	32	TO-3P(Q)	5.1
FMI06N80E	800	6	24	2.0	135	30	4±0.5	32	T-Pack(L)	1.6
FMC06N80E	800	6	24	2.0	135	30	4±0.5	32	T-Pack(S)	1.6
FMV08N80E	800	8	32	1.6	60	30	4±0.5	38	TO-220F(SLS)	1.7
FMH08N80E	800	8	32	1.6	145	30	4±0.5	38	TO-3P(Q)	5.1
FMI08N80E	800	8	32	1.6	165	30	4±0.5	38	T-Pack(L)	1.6
FMC08N80E	800	8	32	1.6	165	30	4±0.5	38	T-Pack(S)	1.6
FMV10N80E	800	10	40	1.1	85	30	4±0.5	50	TO-220F(SLS)	1.7
FMH10N80E	800	10	40	1.1	205	30	4±0.5	50	TO-3P(Q)	5.1
FMV13N80E	800	13	52	0.78	120	30	4±0.5	66	TO-220F(SLS)	1.7
FMH13N80E	800	13	52	0.78	285	30	4±0.5	66	TO-3P(Q)	5.1

*1 $R_{DS(on)}$: $V_{GS}=10V$, *2 P_{tot} : $T_C=25^\circ C$

■ SuperFAP-E³ series

■ 900V class

Device type	<i>V_{DSS}</i>	<i>I_D</i>	<i>I_D</i> (pulse)	<i>R_{DS(on)}</i> max.* ¹	<i>P_{tot}</i> * ²	<i>V_{GS}</i>	<i>V_{GS(th)}</i>	<i>Q_G</i> typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		
FMH06N90E	900	6	24	2.5	115	30	4±0.5	33	TO-3P(Q)	5.1
FMV06N90E	900	6	24	2.5	48	30	4±0.5	33	TO-220F(SLS)	1.7
FMI06N90E	900	6	24	2.5	135	30	4±0.5	33	T-Pack(L)	1.6
FMC06N90E	900	6	24	2.5	135	30	4±0.5	33	T-Pack(S)	1.6
FMH07N90E	900	7	28	2.0	145	30	4±0.5	39	TO-3P(Q)	5.1
FMV07N90E	900	7	28	2.0	60	30	4±0.5	39	TO-220F(SLS)	1.7
FMI07N90E	900	7	28	2.0	165	30	4±0.5	39	T-Pack(L)	1.6
FMC07N90E	900	7	28	2.0	165	30	4±0.5	39	T-Pack(S)	1.6
FMH09N90E	900	9	36	1.4	205	30	4±0.5	50	TO-3P(Q)	5.1
FMV09N90E	900	9	36	1.4	85	30	4±0.5	50	TO-220F(SLS)	1.7
FMR09N90E	900	9	36	1.4	100	30	4±0.5	50	TO-3PF	6.0
FMH11N90E	900	11	44	1.0	285	30	4±0.5	60	TO-3P(Q)	5.1
FMV11N90E	900	11	44	1.0	120	30	4±0.5	60	TO-220F(SLS)	1.7
FMR11N90E	900	11	44	1.0	135	30	4±0.5	60	TO-3PF	6.0

*¹ *R_{DS(on)}*: *V_{GS}*=10V, *² *P_{tot}*: *T_C*=25°C

■ SuperFAP-E^{3S} Low Qg series

Low-on resistance, low switching noise and low switching loss

SuperFAP-E ^{3S} Low Qg series		TO-220	TO-220 (SLS)	TO-3P (Q)	TO-3PF	T-Pack(L)	T-Pack(S)	TFP
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A)						
500	0.5	12	✓	✓		✓	✓	✓
	0.38	16	✓	✓	✓	✓	✓	✓
	0.31	20	✓	✓	✓	✓	✓	✓
	0.27	21		✓	✓	✓		
	0.245	23		✓	✓	✓		
	0.19	28		✓	✓			
600	1.2	6	✓	✓			✓	
	0.75	12	✓	✓			✓	✓
	0.58	13	✓		✓		✓	✓
	0.47	16	✓	✓	✓		✓	✓
	0.4	17		✓	✓	✓		
	0.365	19		✓	✓	✓		
	0.28	23		✓	✓			

■ 500V class

Device type	V _{DSS}	I _D	I _D (pulse)	R _{DS(on)} max. ^{*1}	P _{tot} * ²	V _{GS}	V _{GS(th)}	Q _G typ. nC	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts			Grams
FMP12N50ES	500	12	48	0.5	180	30	3.7±0.5	41	TO-220	2.0
FMV12N50ES	500	12	48	0.5	65	30	3.7±0.5	41	TO-220F(SLS)	1.7
FMI12N50ES	500	12	48	0.5	180	30	3.7±0.5	41	T-Pack(L)	1.6
FMC12N50ES	500	12	48	0.5	180	30	3.7±0.5	41	T-Pack(S)	1.6
FML12N50ES	500	12	48	0.5	180	30	3.7±0.5	41	TFP	1.6
FMP16N50ES	500	16	64	0.38	225	30	3.7±0.5	52	TO-220	2.0
FMV16N50ES	500	16	64	0.38	80	30	3.7±0.5	52	TO-220F(SLS)	1.7
FMI16N50ES	500	16	64	0.38	225	30	3.7±0.5	52	T-Pack(L)	1.6
FMC16N50ES	500	16	64	0.38	225	30	3.7±0.5	52	T-Pack(S)	1.6
FMH16N50ES	500	16	64	0.38	195	30	3.7±0.5	52	TO-3P(Q)	5.1
FML16N50ES	500	16	64	0.38	225	30	3.7±0.5	52	TFP	1.6
FMP20N50ES	500	20	80	0.31	270	30	4.2±0.5	57	TO-220	2.0
FMV20N50ES	500	20	80	0.31	95	30	4.2±0.5	57	TO-220F(SLS)	1.7
FMI20N50ES	500	20	80	0.31	270	30	4.2±0.5	57	T-Pack(L)	1.6
FMC20N50ES	500	20	80	0.31	270	30	4.2±0.5	57	T-Pack(S)	1.6
FMH20N50ES	500	20	80	0.31	235	30	4.2±0.5	57	TO-3P(Q)	5.1
FML20N50ES	500	20	80	0.31	270	30	4.2±0.5	57	TFP	1.6
FMV21N50ES	500	21	84	0.27	120	30	4.2±0.5	67	TO-220F(SLS)	1.7
FMR21N50ES	500	21	84	0.27	135	30	4.2±0.5	67	TO-3PF	6.0
FMH21N50ES	500	21	84	0.27	285	30	4.2±0.5	67	TO-3P(Q)	5.1
FMV23N50ES	500	23	92	0.245	130	30	4.2±0.5	74	TO-220F(SLS)	1.7
FMR23N50ES	500	23	92	0.245	150	30	4.2±0.5	74	TO-3PF	6.0
FMH23N50ES	500	23	92	0.245	315	30	4.2±0.5	74	TO-3P(Q)	5.1
FMR28N50ES	500	28	112	0.19	200	30	4.2±0.5	92	TO-3PF	6.0
FMH28N50ES	500	28	112	0.19	400	30	4.2±0.5	92	TO-3P(Q)	5.1

*¹ R_{DS(on)} : V_{GS}=10V, *² P_{tot}: T_C=25°C

The SuperFAP-E^{3S} series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric. Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ SuperFAP-E^{3S} Low Qg series

■ 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
FMP06N60ES	600	6	24	1.2	105	30	3.7 ± 0.5	31	TO-220	2.0
FMV06N60ES	600	6	24	1.2	37	30	3.7 ± 0.5	31	TO-220F(SLS)	1.7
FMI06N60ES	600	6	24	1.2	105	30	3.7 ± 0.5	31	T-Pack(L)	1.6
FMC06N60ES	600	6	24	1.2	105	30	3.7 ± 0.5	31	T-Pack(S)	1.6
FMP12N60ES	600	12	48	0.75	180	30	4.2 ± 0.5	37	TO-220	2.0
FMV12N60ES	600	12	48	0.75	65	30	4.2 ± 0.5	37	TO-220F(SLS)	1.7
FMI12N60ES	600	12	48	0.75	180	30	4.2 ± 0.5	37	T-Pack(L)	1.6
FMC12N60ES	600	12	48	0.75	180	30	4.2 ± 0.5	37	T-Pack(S)	1.6
FML12N60ES	600	12	48	0.75	180	30	4.2 ± 0.5	37	TFP	1.6
FMP13N60ES	600	13	48	0.58	225	30	4.2 ± 0.5	48	TO-220	2.0
FMV13N60ES	600	13	48	0.58	225	30	4.2 ± 0.5	48	TO-220F(SLS)	1.7
FMI13N60ES	600	13	48	0.58	225	30	4.2 ± 0.5	48	T-Pack(L)	1.6
FMC13N60ES	600	13	48	0.58	225	30	4.2 ± 0.5	48	T-Pack(S)	1.6
FMH13N60ES	600	13	48	0.58	195	30	4.2 ± 0.5	48	TO-3P(Q)	5.1
FML13N60ES	600	13	48	1.58	225	30	4.2 ± 0.5	48	TFP	1.6
FMP16N60ES	600	16	64	0.47	270	30	4.2 ± 0.5	56	TO-220	2.0
FMV16N60ES	600	16	64	0.47	95	30	4.2 ± 0.5	56	TO-220F(SLS)	1.7
FMI16N60ES	600	16	64	0.47	270	30	4.2 ± 0.5	56	T-Pack(L)	1.6
FMC16N60ES	600	16	64	0.47	270	30	4.2 ± 0.5	56	T-Pack(S)	1.6
FMH16N60ES	600	16	64	0.47	235	30	4.2 ± 0.5	56	TO-3P(Q)	5.1
FML16N60ES	600	16	64	0.47	270	30	4.2 ± 0.5	56	TFP	1.6
FMV17N60ES	600	17	68	0.4	120	30	4.2 ± 0.5	68	TO-220F(SLS)	1.7
FMR17N60ES	600	17	68	0.4	135	30	4.2 ± 0.5	68	TO-3PF	6.0
FMH17N60ES	600	17	68	0.4	285	30	4.2 ± 0.5	68	TO-3P(Q)	5.1
FMV19N60ES	600	19	76	0.365	130	30	4.2 ± 0.5	74	TO-220F(SLS)	1.7
FMR19N60ES	600	19	76	0.365	150	30	4.2 ± 0.5	74	TO-3PF	6.0
FMH19N60ES	600	19	76	0.365	315	30	4.2 ± 0.5	74	TO-3P(Q)	5.1
FMR23N60ES	600	23	92	0.28	200	30	4.2 ± 0.5	92	TO-3PF	6.0
FMH23N60ES	600	23	92	0.28	400	30	4.2 ± 0.5	92	TO-3P(Q)	5.1

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

The SuperFAP-E^{3S} series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.

Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ SuperFAP-G series

Low-on resistance and low gate charge

SuperFAP-G series		TO-220	TO-220F	TO-220 (SLS)	TO-3PF	TO-247	T-Pack(L)	T-Pack(S)	TFP
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)							
100	0.062	29	✓	✓			✓	✓	
120	0.03	67	✓	✓			✓	✓	✓
150	0.105	23	✓	✓			✓	✓	
	0.1	23							
	0.07	33	✓	✓			✓	✓	✓
	0.041	57	✓	✓			✓	✓	✓
	0.016	100				✓			
200	0.17	18	✓	✓			✓	✓	✓
	0.066	45	✓	✓			✓	✓	✓
250	0.26	14	✓	✓			✓	✓	
	0.13	24			✓				
	0.1	37	✓	✓		✓	✓	✓	✓
	0.053	59				✓	✓		
280	0.061	56				✓	✓		
300	0.28	15		✓			✓	✓	✓
	0.13	32	✓	✓					
450	2.5	3	✓	✓					
	1.6	4	✓	✓					
	0.65	10	✓	✓			✓	✓	
	0.38	17	✓	✓			✓	✓	✓
500	2.3	4	✓	✓			✓	✓	
	0.85	9	✓	✓			✓	✓	
	0.7	11	✓	✓			✓	✓	
	0.52	14	✓	✓			✓	✓	
	0.46	16	✓	✓			✓	✓	
	0.38	19	✓	✓			✓	✓	✓
	0.26	25				✓	✓		
	0.11	51					✓		
600	3.3	3	✓	✓			✓	✓	
	1.2	8	✓	✓			✓	✓	
	1	9	✓	✓			✓	✓	
	0.75	12	✓	✓			✓	✓	
	0.65	13	✓	✓		✓			
	0.57	16	✓	✓			✓	✓	
	0.37	21				✓	✓		
700	0.6	17				✓			
900	8	2.2	✓	✓					
	6.4	2.6	✓	✓			✓	✓	
	4.3	3.7	✓	✓					
	2.5	6.0					✓	✓	

■ SuperFAP-G series

■ 100 – 250V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
2SK3598-01	100	29	116	0.062	105	± 30	3 to 5	22	TO-220	2.0
2SK3599-01MR	100	29	116	0.062	37	± 30	3 to 5	22	TO-220F	1.7
2SK3600-01L, S	100	29	116	0.062	105	± 30	3 to 5	22	T-pack	1.6
2SK3920-01	120	67	268	0.03	270	± 30	3 to 5	52	TO-220	2.0
2SK3886-01MR	120	67	268	0.03	95	± 30	3 to 5	52	TO-220F	1.7
2SK3921-01L, S	120	67	268	0.03	270	± 30	3 to 5	52	T-pack	1.6
2SK3922-01	120	67	268	0.03	270	± 30	3 to 5	52	TFP	0.8
2SK3602-01	150	23	92	0.105	105	± 30	3 to 5	21	TO-220	2.0
2SK3603-01MR	150	23	92	0.105	37	± 30	3 to 5	21	TO-220F	1.7
2SK3604-01L, S	150	23	92	0.105	105	± 30	3 to 5	21	T-pack	1.6
2SK3648-01	150	33	132	0.07	150	± 30	3 to 5	34	TO-220	2.0
2SK3649-01MR	150	33	132	0.07	53	± 30	3 to 5	34	TO-220F	1.7
2SK3650-01L, S	150	33	132	0.07	150	± 30	3 to 5	34	T-pack	1.6
2SK3474-01	150	33	132	0.07	150	± 30	3 to 5	34	TFP	0.8
2SK3537-01MR	150	33	132	0.07	53	± 20	1 to 2.5	46	TO-220F	1.7
2SK3590-01	150	57	228	0.041	270	± 30	3 to 5	52	TO-220	2.0
2SK3591-01MR	150	57	228	0.041	95	± 30	3 to 5	52	TO-220F	1.7
2SK3592-01L, S	150	57	228	0.041	270	± 30	3 to 5	52	T-pack	1.6
2SK3593-01	150	57	228	0.041	270	± 30	3 to 5	52	TFP	0.8
2SK3882-01	150	100	400	0.016	600	± 30	3 to 5	140	TO-247	4.9
2SK3606-01	200	18	72	0.17	105	± 30	3 to 5	21	TO-220	2.0
2SK3607-01MR	200	18	72	0.17	37	± 30	3 to 5	21	TO-220F	1.7
2SK3608-01L, S	200	18	72	0.17	105	± 30	3 to 5	21	T-pack	1.6
2SK3609-01	200	18	72	0.17	105	± 30	3 to 5	21	TFP	0.8
2SK3594-01	200	45	180	0.066	270	± 30	3 to 5	51	TO-220	2.0
2SK3595-01MR	200	45	180	0.066	95	± 30	3 to 5	51	TO-220F	1.7
2SK3596-01L, S	200	45	180	0.066	270	± 30	3 to 5	51	T-pack	1.6
2SK3597-01	200	45	180	0.066	270	± 30	3 to 5	51	TFP	0.8
2SK3610-01	250	14	56	0.26	105	± 30	3 to 5	21	TO-220	2.0
2SK3611-01MR	250	14	56	0.26	37	± 30	3 to 5	21	TO-220F	1.7
2SK3612-01L, S	250	14	56	0.26	105	± 30	3 to 5	21	T-pack	1.6
FMV24N25G	250	24	96	0.13	65	± 30	3 to 5	36	TO-220F(SLS)	1.7
2SK3554-01	250	37	148	0.1	270	± 30	3 to 5	44	TO-220	2.0
2SK3555-01MR	250	37	148	0.1	95	± 30	3 to 5	44	TO-220F	1.7
2SK3556-01L, S	250	37	148	0.1	270	± 30	3 to 5	44	T-pack	1.6
2SK3535-01	250	37	148	0.1	270	± 30	3 to 5	44	TFP	0.8
2SK3651-01R	250	37	148	0.1	115	± 30	3 to 5	44	TO-3PF	6.0
2SK3778-01	250	59	236	0.053	410	± 30	3 to 5	80	TO-247	4.9
2SK3779-01R	250	59	236	0.053	210	± 30	3 to 5	80	TO-3PF	6.0

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_c=25^\circ C$

The Super FAP-G series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric.
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ SuperFAP-G series

■ 300 – 500V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G typ. nC	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts			Grams
2SK3580-01MR	300	15	60	0.28	48	± 30	3.5 to 4.5	23	TO-220F	1.7
2SK3772-01	300	32	128	0.13	270	± 30	3 to 5	44.5	TO-220	2.0
2SK3773-01MR	300	32	128	0.13	95	± 30	3 to 5	44.5	TO-220F	1.7
2SK3774-01L, S	300	32	128	0.13	270	± 30	3 to 5	44.5	T-pack	1.6
2SK3775-01	300	32	128	0.13	270	± 30	3 to 5	44.5	TFP	0.8
2SK3725-01	450	3	12	2.5	50	± 30	3 to 5	10.5	TO-220	2.0
2SK3726-01MR	450	3	12	2.5	17	± 30	3 to 5	10.5	TO-220F	1.7
2SK3916-01	450	4.3	17.2	1.6	21	± 30	3 to 5	13	TO-220	2.0
2SK3917-01MR	450	4.3	17.2	1.6	21	± 30	3 to 5	13	TO-220F	1.7
2SK3514-01	450	10	40	0.65	135	± 30	3 to 5	22	TO-220	2.0
2SK3515-01MR	450	10	40	0.65	48	± 30	3 to 5	22	TO-220F	1.7
2SK3516-01L, S	450	10	40	0.65	135	± 30	3 to 5	22	T-pack	1.6
2SK3692-01	450	17	68	0.38	225	± 30	3 to 5	33	TO-220	2.0
2SK3693-01MR	450	17	68	0.38	80	± 30	3 to 5	33	TO-220F	1.7
2SK3694-01L, S	450	17	68	0.38	225	± 30	3 to 5	33	T-pack	1.6
2SK4040-01	450	17	68	0.38	225	± 30	3 to 5	33	TFP	0.8
2SK3985-01	500	3.6	14.4	2.3	60	± 30	3 to 5	13	TO-220	2.0
2SK3986-01MR	500	3.6	14.4	2.3	21	± 30	3 to 5	13	TO-220F	1.7
2SK3987-01L, S	500	3.6	14.4	2.3	60	± 30	3 to 5	13	T-pack	1.6
2SK3519-01	500	9	36	0.85	135	± 30	3 to 5	20	TO-220	2.0
2SK3520-01MR	500	9	36	0.85	48	± 30	3 to 5	20	TO-220F	1.7
2SK4004-01MR	500	9	36	0.85	48	± 30	2.5 to 3.5	24	TO-220F	1.7
2SK3521-01L, S	500	9	36	0.85	135	± 30	3 to 5	20	T-pack	1.6
2SK3931-01	500	11	44	0.70	165	± 30	3 to 5	25	TO-220	2.0
2SK3932-01MR	500	11	44	0.70	60	± 30	3 to 5	25	TO-220F	1.7
2SK3933-01L, S	500	11	44	0.70	165	± 30	3 to 5	25	T-pack	1.6
2SK3468-01	500	14	56	0.52	195	± 30	3 to 5	30	TO-220	2.0
2SK3469-01MR	500	14	56	0.52	70	± 30	3 to 5	30	TO-220F	1.7
2SK3512-01L, S	500	14	56	0.52	195	± 30	3 to 5	30	T-pack	1.6
2SK3504-01	500	16	64	0.46	225	± 30	3 to 5	33	TO-220	2.0
2SK3505-01MR	500	16	64	0.46	80	± 30	3 to 5	33	TO-220F	1.7
2SK3581-01L, S	500	16	64	0.46	225	± 30	3 to 5	33	T-pack	1.6
2SK3682-01	500	19	76	0.38	270	± 30	3 to 5	32	TO-220	2.0
2SK3683-01MR	500	19	76	0.38	95	± 30	3 to 5	32	TO-220F	1.7
2SK3684-01L, S	500	19	76	0.38	270	± 30	3 to 5	32	T-pack	1.6
2SK3685-01	500	19	76	0.38	235	± 30	3 to 5	32	TO-247	4.9
FML19N50G	500	19	76	0.38	270	± 30	3 to 5	32	TFP	0.8
2SK3522-01	500	25	100	0.26	335	± 30	3 to 5	54	TO-247	4.9
2SK3523-01R	500	25	100	0.26	160	± 30	3 to 5	54	TO-3PF	6.0
2SK3680-01	500	51	208	0.11	600	± 30	3 to 5	118	TO-247	4.9

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

■ SuperFAP-G series

■ 600 – 900V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
2SK3988-01	600	3	12	3.3	60	± 30	3 to 5	13	TO-220	2.0
2SK3989-01MR	600	3	12	3.3	21	± 30	3 to 5	13	TO-220F	1.7
2SK3990-01L, S	600	3	12	3.3	60	± 30	3 to 5	13	T-pack	1.6
2SK3524-01	600	8	32	1.2	135	± 30	3 to 5	20	TO-220	2.0
2SK3525-01MR	600	8	32	1.2	48	± 30	3 to 5	20	TO-220F	1.7
2SK3526-01L, S	600	8	32	1.2	135	± 30	3 to 5	20	T-pack	1.6
2SK3887-01	600	9	36	1.0	165	± 30	3 to 5	25	TO-220	2.0
2SK3888-01MR	600	9	36	1.0	60	± 30	3 to 5	25	TO-220F	1.7
2SK3889-01L, S	600	9	36	1.0	165	± 30	3 to 5	25	T-pack	1.6
2SK3501-01	600	12	48	0.75	195	± 30	3 to 5	30	TO-220	2.0
2SK3502-01MR	600	12	48	0.75	70	± 30	3 to 5	30	TO-220F	1.7
2SK3513-01L, S	600	12	48	0.75	195	± 30	3 to 5	30	T-pack	1.6
2SK3450-01	600	13	52	0.65	225	± 30	3 to 5	34	TO-220	2.0
2SK3451-01MR	600	13	52	0.65	80	± 30	3 to 5	34	TO-220F	1.7
2SK3753-01R	600	13	52	0.65	95	± 30	3 to 5	34	TO-3PF	6.0
2SK3686-01	600	16	64	0.57	270	± 30	3 to 5	33	TO-220	2.0
2SK3687-01MR	600	16	64	0.57	97	± 30	3 to 5	33	TO-220F	1.7
2SK3688-01L, S	600	16	64	0.57	270	± 30	3 to 5	33	T-pack	1.6
2SK3689-01	600	16	64	0.57	235	± 30	3 to 5	33	TO-247	4.9
2SK3527-01	600	21	84	0.37	335	± 30	3 to 5	54	TO-247	4.9
2SK3528-01R	600	21	84	0.37	160	± 30	3 to 5	54	TO-3PF	6.0
2SK3681-01	600	43	172	0.16	600	± 30	3 to 5	118	TO-247	4.9
2SK3891-01R	700	17	68	0.6	170	± 30	3 to 5	46	TO-3PF	6.0
2SK3727-01	900	2.2	8.8	8.0	75	± 30	3.5 to 4.5	8.3	TO-220	2.0
2SK3728-01MR	900	2.2	8.8	8.0	26	± 30	3.5 to 4.5	8	TO-220F	1.7
2SK3981-01	900	2.6	10.4	6.4	90	± 30	3 to 5	13	TO-220	2.0
2SK3982-01MR	900	2.6	10.4	6.4	32	± 30	3 to 5	13	TO-220F	1.7
2SK3983-01L, S	900	2.6	10.4	6.4	90	± 30	3 to 5	13	T-pack	1.6
2SK3698-01	900	3.7	14.8	4.3	120	± 30	3.5 to 4.5	13	TO-220	2.0
2SK3699-01MR	900	3.7	14.8	4.3	43	± 30	3.5 to 4.5	13	TO-220F	1.7
2SK3676-01L, S	900	6	24	2.5	195	± 30	3 to 5	21.5	T-pack	1.6

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

■ SuperFAP-G Built-in FRED series

SuperFAP-G Built-in FRED series			TO-220	TO-220F	TO-247	T-Pack (L)	T-Pack (S)
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)					
500	0.55	13	✓	✓			
600	0.8	11	✓	✓		✓	✓
	0.17	42			✓		

■ 500 – 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ₁	P_{tot} * ₂	V_{GS}	$V_{GS(th)}$	Q_G typ. nC	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts			Grams
2SK3695-01	500	13	52	0.55	195	± 30	3 to 5	28	TO-220	2.0
2SK3696-01MR	500	13	52	0.55	70	± 30	3 to 5	28	TO-220F	1.7
2SK3928-01	600	11	44	0.8	195	± 30	3 to 5	30	TO-220	2.0
2SK3929-01MR	600	11	44	0.8	70	± 30	3 to 5	30	TO-220F	1.7
2SK3930-01L, S	600	11	44	0.8	195	± 30	3 to 5	30	T-pack	1.6
2SK3697-01	600	42	168	0.17	600	± 30	3 to 5	105	TO-247	4.9

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

Trench Power MOSFET

Low-on resistance and high gate capability

Trench Power MOSFET			TO-220	TO-220F	TO-3P (Q)	TO-247	T-Pack(L)	T-Pack(S)	D2-pack
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A)							
40	0.060	70				✓			
60	0.0065	70		✓					
	80	✓							
	0.0065	100			✓				
75	0.0079	70		✓					
	0.0085	70						✓	
100	0.0067	80						✓	
	0.0067	100				✓			
	0.0128	80	✓	✓			✓	✓	
150	0.0245	65	✓	✓			✓	✓	
200	0.0470	49	✓	✓			✓	✓	

■ 60 – 100V class

Device type	V _{DSS} Volts	I _D Amps.	I _D (pulse) Amps.	R _{DS(on)} max. *1 Ohms	P _{tot} *2 Watts	V _{GS} Volts	V _{GS(th)} typ. Volts	Package	Net mass
								Grams	
2SK4068-01	40	70	280	0.006	115	+30/-20	3.0	TO-247	4.9
2SK3273-01MR	60	70	280	0.0065	70	+30/-20	3.0	TO-220F	1.7
2SK3270-01	60	80	320	0.0065	135	+30/-20	3.0	TO-220	2.0
2SK3272-01L, S	60	80	320	0.0065	135	+30/-20	3.0	T-pack (L, S)	1.6
2SK3272-01SJ	60	80	320	0.0065	135	+30/-20	3.0	D2-pack	1.6
2SK4047-01S	60	80	320	0.0065	195	+30/-20	3.0	T-pack (S)	1.6
2SK3271-01	60	100	400	0.0065	155	+30/-20	3.0	TO-3P	5.5
2SK3730-01MR	75	70	280	0.0079	70	±20	3.0	TO-220F	1.7
2SK3804-01S	75	70	280	0.0085	162	±20	3.0	T-pack (S)	1.6
FMC80N10R6	100	80	320	0.0067	180	+30/-20	3.0	T-pack (S)	1.6
FMY100N10R6	100	100	400	0.0067	280	+30/-20	3.0	TO-247	6.3

*1 R_{DS(on)}: V_{GS}=10V, *2 P_{tot}: T_C=25°C

■ 100 – 200V class

Device type	V _{DSS} Volts	I _D Amps.	I _D (pulse) Amps.	R _{DS(on)} max. *1 Ohms	P _{tot} *2 Watts	V _{GS} Volts	V _{GS(th)} typ. Volts	Package	Net mass
								Grams	
FMP80N10T2	100	80	320	0.0128	270	+30/-20	2 to 4	TO-220	2.0
FMA80N10T2	100	80	320	0.0128	95	+30/-20	2 to 4	TO-220F	1.7
FMI80N10T2	100	80	320	0.0128	270	+30/-20	2 to 4	T-pack(L)	1.6
FMC80N10T2	100	80	320	0.0128	270	+30/-20	2 to 4	T-pack(S)	1.6
FMP65N15T2	150	65	260	0.0245	270	+30/-20	2 to 4	TO-220	2.0
FMA65N15T2	150	65	260	0.0245	95	+30/-20	2 to 4	TO-220F	1.7
FMI65N15T2	150	65	260	0.0245	270	+30/-20	2 to 4	T-pack(L)	1.6
FMC65N15T2	150	65	260	0.0245	270	+30/-20	2 to 4	T-pack(S)	1.6
FMP49N20T2	200	49	196	0.047	270	+30/-20	2 to 4	TO-220	2.0
FMA49N20T2	200	49	196	0.047	95	+30/-20	2 to 4	TO-220F	1.7
FMI49N20T2	200	49	196	0.047	270	+30/-20	2 to 4	T-pack(L)	1.6
FMC49N20T2	200	49	196	0.047	270	+30/-20	2 to 4	T-pack(S)	1.6

*1 R_{DS(on)}: V_{GS}=10V, *2 P_{tot}: T_C=25°C

The Trench Power MOSFET series products satisfies the quality assurance level of general consumer use.

If you intend to use the products for equipment requiring higher reliability, such as equipment for automobiles and medical equipment, please contact Fuji Electric. Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive Super J MOS® S1 series



Low-on resistance, low switching noise and low switching loss

Automotive Super J MOS® S1 Series			TO-247	T-Pack(S)
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)		
600	0.145	29	✓	✓
	0.082	46	✓	
	0.070	47	✓	
	0.071	52	✓	
	0.062	53	✓	
	0.046	67	✓	
	0.040	68	✓	
650	0.071	52	✓	

■ 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	typ. Volts	typ. nC		Grams
FMY47N60S1A	600	47	141	0.070	390	30	3.0±0.5	125	TO-247	6.4
FMY53N60S1A	600	53	159	0.062	480	30	3.0±0.5	164	TO-247	6.4
FMY68N60S1A	600	68	204	0.040	545	30	3.0±0.5	203	TO-247	6.4

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_c=25^\circ C$

Super J MOS® is registered trademarks of Fuji Electric.

Automotive Super J MOS® S1 series of products satisfies the quality assurance level of general automobile use (conforms to AEC-Q101).
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive Super J MOS® S1FD series (Built-in FRED type)



■ 600V, 650V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G	t_{fr}	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	typ. Volts	typ. nC	typ. nsec		Grams
FMC29N60S1FDA	600	29	87	0.145	220	30	4.0±1	75	170	T-Pack	1.6
FMY29N60S1FDA	600	29	87	0.145	220	30	4.0±1	75	170	TO-247	6.4
FMY46N60S1FDA	600	46	138	0.082	390	30	4.0±1	130	210	TO-247	6.4
FMY52N60S1FDA	600	52	156	0.071	480	30	4.0±1	165	280	TO-247	6.4
FMY67N60S1FDA	600	67	201	0.046	545	30	4.0±1	220	280	TO-247	6.4
FMY52N65S1FDA	650	52	156	0.071	480	30	4.0±1	165	280	TO-247	6.4

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_c=25^\circ C$

Super J MOS® is registered trademarks of Fuji Electric.

The Automotive Super J MOS® S1FD series of products satisfies the quality assurance level of general automobile use (conforms to AEC-Q101).
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive Super J MOS® S2 series

Low-on resistance, low switching noise and low switching loss



Automotive Super J MOS® S2 Series			TO-247	T-Pack(S)
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)		
400	0.060	42		✓
500	0.071	38.9	✓	✓
600	0.160	17.9	✓	✓
0.133	22.8	✓	✓	
0.125	22.8	✓	✓	
0.105	29.3	✓	✓	
0.099	29.3	✓	✓	
0.088	32.8	✓	✓	
0.081	37.1	✓	✓	
0.079	37.1	✓	✓	
0.070	39.4	✓		
0.040	66.2	✓		
0.025	95.5	✓		

■ 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$	Q_G	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	typ. Volts	typ. nC		Grams
FMY60N160S2A	600	17.9	53.7	0.160	110	30	4.0±0.5	43	TO-247	6.4
FMC60N160S2A	600	17.9	53.7	0.160	127	30	4.0±0.5	43	T-Pack	1.6
FMY60N125S2A	600	22.8	68.2	0.125	140	30	4.0±0.5	53	TO-247	6.4
FMC60N125S2A	600	22.8	68.2	0.125	160	30	4.0±0.5	53	T-Pack	1.6
FMY60N099S2A	600	29.3	87.7	0.099	185	30	4.0±0.5	65	TO-247	6.4
FMC60N099S2A	600	29.3	87.7	0.099	210	30	4.0±0.5	65	T-Pack	1.6
FMY60N088S2A	600	32.8	98.4	0.088	205	30	4.0±0.5	72	TO-247	6.4
FMC60N088S2A	600	32.8	98.4	0.088	235	30	4.0±0.5	72	T-Pack	1.6
FMY60N079S2A	600	37.1	111.3	0.079	235	30	4.0±0.5	80	TO-247	6.4
FMC60N079S2A	600	37.1	111.3	0.079	270	30	4.0±0.5	80	T-Pack	1.6
FMY60N070S2A	600	39.4	118.2	0.070	270	30	4.0±0.5	90	TO-247	6.4
FMY60N040S2A	600	66.2	198.6	0.040	435	30	4.0±0.5	147	TO-247	6.4
FMY60N025S2A	600	95.5	286.5	0.025	575	30	4.0±0.5	222	TO-247	6.4

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

Super J MOS® is registered trademarks of Fuji Electric.

The Automotive Super J MOS® S1FD series of products satisfies the quality assurance level of general automobile use (conforms to AEC-Q101).
Do not use the products for equipment requiring strict reliability such as aerospace equipment.



Automotive Super J MOS® S2FD series (Built-in FRED type)

■ 400V, 500V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max.* ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$ typ.	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
FMC40N060S2FDA	400	42	126	0.060	270	30	4.0±1	120	T-Pack	1.6
FMY50N071S2FDA	500	38.9	116.7	0.071	235	30	4.0±1	98	TO-247	6.4
FMC50N071S2FDA	500	38.9	116.7	0.071	270	30	4.0±1	98	T-Pack	1.6

■ 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max.* ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$ typ.	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
FMY60N133S2FDA	600	22.8	68.2	0.133	140	30	4.0±1	59	TO-247	6.4
FMC60N133S2FDA	600	22.8	68.2	0.133	160	30	4.0±1	59	T-Pack	1.6
FMY60N105S2FDA	600	29.3	87.7	0.105	185	30	4.0±1	75	TO-247	6.4
FMC60N105S2FDA	600	29.3	87.7	0.105	210	30	4.0±1	75	T-Pack	1.6
FMY60N081S2FDA	600	37.1	111.3	0.081	235	30	4.0±1	93	TO-247	6.4
FMC60N081S2FDA	600	37.1	111.3	0.081	270	30	4.0±1	93	T-Pack	1.6

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

Super J MOS® is registered trademarks of Fuji Electric.

The Automotive Super J MOS® S2FD series of products satisfies the quality assurance level of general automobile use (conforms to AEC-Q101).
Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive MOSFET (Trench Power MOS、SuperFAP-E^{3S})

Automotive Trench Power MOSFET SuperFAP-E ^{3S} Low Qg series		TO-220	TO-220F	TO-3P (Q)	TO-247	T-Pack(L)	T-Pack(S)	D2-pack
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A)						
40	0.006	70				✓		
60	0.0065	70						
		80	✓					
		100			✓	✓		
		120						
75	0.0079	70		✓				
	0.0085	70						
	0.0067	80						
100	0.0128	80						
	0.0067	100						
	0.0245	65						
200	0.047	49						
300	0.085	47				✓		
	0.072	50				✓		
	0.053	67				✓		
	0.045	72				✓		
600	0.29	22				✓		
	0.28	24				✓		
	0.21	30				✓		
	0.20	31				✓		
	0.17	35				✓		
	0.16	36				✓		

■ Automotive SuperFAP-E^{3S} Low Qg series



■ 300 – 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$ typ.	Q_G typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC		Grams
FMY50N30ES	300	50	200	0.072	400	+30/-30	4.2±0.5	97	TO-247	6.4
FMY72N30ES	300	72	288	0.045	570	+30/-30	4.2±0.5	155	TO-247	6.4
FMY24N60ES	600	24	96	0.280	400	+30/-30	4.2±0.5	95	TO-247	6.4
FMY31N60ES	600	31	124	0.200	495	+30/-30	4.2±0.5	125	TO-247	6.4
FMY36N60ES	600	36	144	0.160	570	+30/-30	4.2±0.5	155	TO-247	6.4

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

The Automotive SuperFAP-E^{3S} Low Qg series of products satisfies the quality assurance level of general automobile use (conforms to AEC-Q101). Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive SuperFAP-E^{3S} Low Qg Built-in FRED series



Low-on resistance, low switching noise and low switching loss

■ 300 – 600V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$ typ.	Q_G typ.	t_{rr} typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts	nC	nsec		Grams
FMY47N30ESF	300	47	188	0.085	400	+30/-30	4.2±1.0	96	130	TO-247	6.4
FMY67N30ESF	300	67	268	0.053	570	+30/-30	4.2±1.0	155	150	TO-247	6.4
FMY22N60ESF	600	22	88	0.290	400	+30/-30	4.2±1.0	95	150	TO-247	6.4
FMY30N60ESF	600	30	120	0.210	495	+30/-30	4.2±1.0	125	160	TO-247	6.4
FMY35N60ESF	600	35	140	0.170	570	+30/-30	4.2±1.0	155	160	TO-247	6.4

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

Automotive SuperFAP-E^{3S} Low Qg Built-in FRED series of products satisfies the quality assurance level of general automobile use (conforms to AEC-Q101). Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive Trench Power MOSFET

■ 40 – 100V class

Device type	V_{DSS}	I_D	I_D (pulse)	$R_{DS(on)}$ max. * ¹	P_{tot} * ²	V_{GS}	$V_{GS(th)}$ typ.	Package	Net mass
	Volts	Amps.	Amps.	Ohms	Watts	Volts	Volts		Grams
2SK4068-01	40	70	280	0.006	115	+30/-20	3.0	TO-247	4.9
2SK3273-01MR	60	70	280	0.0065	70	+30/-20	3.0	TO-220F	1.7
2SK3270-01	60	80	320	0.0065	135	+30/-20	3.0	TO-220	2.0
2SK3272-01L, S	60	80	320	0.0065	135	+30/-20	3.0	T-pack	1.6
2SK3272-01SJ	60	80	320	0.0065	135	+30/-20	3.0	D2-pack	1.6
2SK4047-01S	60	80	320	0.0065	195	+30/-20	3.0	T-pack	1.6
FMY100N06T * ³	60	100	400	0.0065	135	+30/-20	3.0	TO-247	6.3
2SK3271-01	60	100	400	0.0065	155	+30/-20	3.0	TO-3P	5.5
2SK3730-01MR	75	70	280	0.0079	70	±20	3.0	TO-220F	1.7
2SK3804-01S	75	70	280	0.0085	135	±20	3.0	T-pack	1.6
FMC80N10R6	100	80	320	0.0067	324	+30/-20	3.0	T-Pack	1.6
FMY100N10R6 * ³	100	100	400	0.0067	280	+30/-20	3.0	TO-247	6.3

*¹ $R_{DS(on)}$: $V_{GS}=10V$, *² P_{tot} : $T_C=25^\circ C$

*³ FMY100N06T and FMY100N10R6 satisfies the quality assurance level of general automobile use (conforms to AEC-Q101). Do not use the products for equipment requiring strict reliability such as aerospace equipment.

■ Automotive IPS series (Intelligent Power Switches)

Self protection

Device type	Type	Channels	V_{CC} DC (pulse) Volts	I_D Amps.	$R_{DS(on)}$ typ. Ohms	$R_{DS(on)}$ max. Ohms	P_{tot} Watts	Package	Net mass Grams	Remarks
F5044H	High side	1	33 (50)	2.5	0.09 *1	0.12 *1	1.5	SOP-8	0.2	
F5045P	High side	1	33 (50)	1	0.37 *1	0.60 *1	1.5	SOP-8	0.2	
F5106H	High side	1	35 (50)	2	0.1 *1	0.12 *1	1.5	SOP-8	0.2	Built-in Amp
F5112H	High side	1	35 (50)	2	0.1 *1	0.12 *1	2	SOP-8	0.2	Low stand by current version for F5044H
F5062H	High side	1	35 (50)	50	0.006 *1	0.008 *1	114	PSOP-12	0.4	
F5074H	High side	1	35 (50)	80	0.004 *1	0.005 *1	114	PSOP-12	0.4	
F5018	Low side	1	40	8	0.088 *2	0.14 *2	15	K-pack	0.6	
F5019	Low side	1	40	12	0.088 *2	0.14 *2	30	T-pack	1.6	
F5020	Low side	1	40	3	0.25 *2	0.40 *2	10	K-pack	0.6	
F5033	Low side	2	40	1	0.41 *2	0.60 *2	1.5	SOP-8	0.2	
F5041	Low side	2	40	1	0.47 *2	0.60 *2	1.5	SOP-8	0.2	
F5042	Low side	1	40	8	0.088 *2	0.14 *2	15	K-pack	0.6	High frequency switching version for F5018
F5043	Low side	1	40	12	0.088 *2	0.14 *2	30	T-pack	1.6	High frequency switching version for F5019
F5048	Low side	1	80	15	0.091 *2	0.125 *2	43	T-pack	1.6	
F5055	Low side	2	40	5.9	0.088 *2	0.14 *2	7.8	SSOP-20	0.3	
F5063L	Low side	2	40	1.9	0.095 *2	0.14 *2	1.75	SOP-8	0.2	

*1 $R_{DS(on)}$: $V_{CC}=13V$, *2 $R_{DS(on)}$: $V_{IN}/V_{GS}=5V$




Rectifier Diodes

Rectifier Diodes



Fuji Electric's rectifier diodes have features such as low V_F characteristics and low I_R , and are compatible with PFC circuits of power supplies and secondary-side rectification circuits.

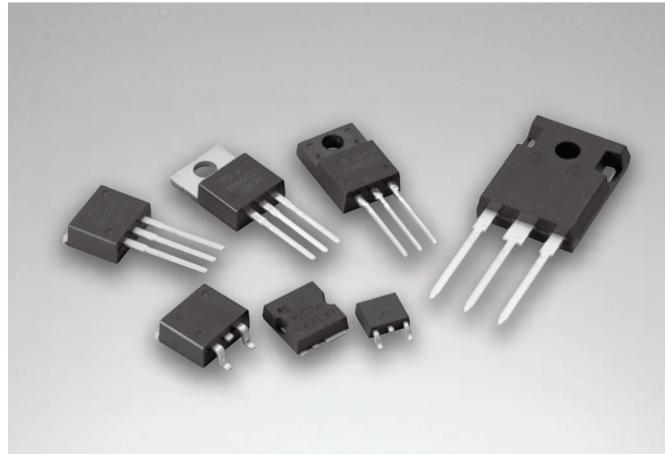

Features of SBD, LLD

Ultra Low-IR SBD (Schottky-Barrier Diode)

■ Features

- Guaranteed $T_{vj}=175^{\circ}\text{C}$
- V_F is same level and I_R is reduced by less than 1/10.

LLD (Low Loss Diode) Super LLD series for PFC circuit

■ Features

Super LLD-3 for CCM-PFC

- Realize acceleration and low V_F compared with existing model.

Super LLD-2 for CRM-PFC

- Achieved low power loss by low V_F
- Achieved low noise by soft recovery

■ Part numbers

FDRW50C60L (example)

F	DR	W	50	C	60	L
Company code	Device code	Package code	Current	Polarity	Voltage	Series
Fuji	DR	FWD	P	TO-220	× 1	S,T
			W	TO-247-P2		C
					60	Ultra Fast Recovery
					65	650V
					120	1200V
						J
						Sort/Fast Recovery

■ Part numbers

YA875C10R (example)

YA	87		5		C	10				R	
Package code	Series		Current		Polarity	Voltage				Additional code	
KP K-Pack (L)	8x	SBD	1	5A	SBD	02	20V	LLD	2	200V	R or RR
KS K-Pack (S)	9x	LLD	2	10A		03	30V		3	300V	
MS TFP			3	15A		04	40V		4	400V	
PA TO-3P			4	15A		06	60V		6	600V	
PG TO-3PF			5	20A		08	80V		8	800V	
PH TO-247			6	30A		09	90V		10	1000V	
TP T-Pack (L)			8	30A		10	100V		12	1200V	
TS T-Pack (S)			9	40A		12	120V		15	1500V	
YA TO-220			0	40A		15	150V				
YG TO-220F						20	200V				

■ Part numbers

ESAD92M02R (example)

ESA	D			92		M		02				R	
Chip	Current			Series		Package code		Voltage				Additional code	
ESA Dual chips	Lead	ERA	≤ 1A	8x	SBD	non	Non Isolation	SBD	004	40V	LLD	02 200V	R or RR
ER Single chip		ERB	≤ 2A	9x	LLD	M	Full mold		006	60V		03 300V	
		ERC	≤ 3A						009	90V			
		ERD	-										
		ERC	≤ 5A										
		ESAB	5A-10A										
		ESAC	10A-20A										
		ESAD	20A-30A										



5 Rectifier Diodes

Schottky-Barrier Diodes(SBD)

Schottky-Barrier Diodes(SBD)					TO-220F	K-Pack(L)	K-Pack(S)	TFP
Chip	V_{RRM} (V)	I_o (A)	V_F (V)	I_R (mA)				
Single	40	5	0.55	5	✓		✓	
	45	10	0.60	2	✓			
	60	5	0.59	5	✓			
		15	0.63	20	✓			
Dual	20	7	0.39	10		✓	✓	
	30	5	0.47	5			✓	
	40	5	0.55	5	✓		✓	
		10	0.55	5	✓			
		20	0.6	15	✓			
		30	0.53	8	✓			✓
		5	0.58	5	✓			
		10	0.58	5	✓			
		15	0.58	5	✓			
		20	0.58	15	✓			
		30	0.58	3				✓
	90	5	0.9	5			✓	
	100	5	0.8	0.7	✓			
		10	0.8	1.2	✓			
		20	0.8	2.5	✓			
		30	0.8	20	✓			

1 in one-package

Device type	Maximum rating V_{RRM} Volts	I_o *1 Amps.	I_{FSM} *2 Amps.	Thermal rating T_{vj} and T_{stg} °C	Characteristics ($T_a=25^\circ\text{C}$) V_{FM} max. Volts	I_{RRM} *3 max.mA	$R_{th(j-c)}$ °C/W	Package	Net mass Grams
KS826S04	40	5.0 ($T_c=110^\circ\text{C}$)	80	-40 to +150	0.55 ($I_f=5.0\text{A}$)	5	10	K-pack(S)	0.6
YG811S04R	40	5.0 ($T_c=122^\circ\text{C}$)	120	-40 to +150	0.55 ($I_f=5.0\text{A}$)	5	5.0	TO-220F	1.7
YG812S04R	45	10 ($T_c=124^\circ\text{C}$)	120	-40 to +150	0.6 ($I_f=10\text{A}$)	2	2.5	TO-220F	1.7
YG811S06R	60	5.0 ($T_c=127^\circ\text{C}$)	80	-40 to +150	0.59 ($I_f=5.0\text{A}$)	5	5.0	TO-220F	1.7
YG804S06R	60	15 ($T_c=99^\circ\text{C}$)	120	-40 to +150	0.63 ($I_f=15\text{A}$)	20	2.2	TO-220F	1.7

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms *3: $V_R=V_{RRM}$

Letter symbols

V_{RRM}	Repetitive peak reverse voltage
V_{RSM}	Non-repetitive peak reverse voltage
I_o	Average output current
I_{FSM}	Surge current
T_{vj}	Junction temperature
T_a	Ambient temperature
T_c	Case temperature

T_{stg}	Storage temperature
V_{FM}	Forward voltage
I_{RRM}	Reverse current
t_{rr}	Reverse recovery time
$R_{th(j-c)}$	Thermal resistance (Junction to case)
T_l	Lead temperature
$I_{F(AV)}$	Average forward current

Schottky-Barrier Diodes(SBD)

2 in one-package

Device type	Maximum rating			Thermal rating T _{VJ} and T _{stg} °C	Characteristics (T _a =25°C)			Package	Net mass Grams
	V _{RRM} Volts	I _O ^{*1} Amps.	I _{FSM} ^{*2} Amps.		V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max.mA	R _{th(j-c)} °C/W		
KP883C02	20	7.0 (T _c =89°C)	60	-40 to +125	0.39 (I _f =2.5A)	10	10.0	K-Pack(L)	0.6
KS883C02	20	7.0 (T _c =89°C)	60	-40 to +125	0.39 (I _f =2.5A)	10	10.0	K-pack(S)	0.6
KS823C03	30	5.0 (T _c =117°C)	60	-40 to +150	0.47 (I _f =2.5A)	5	10.0	K-pack(S)	0.6
KS823C04	40	5.0 (T _c =107°C)	60	-40 to +150	0.55 (I _f =2.5A)	5	10.0	K-pack(S)	0.6
YG801C04R	40	5.0 (T _c =125°C)	100	-40 to +150	0.55 (I _f =2.0A)	5	5.0	TO-220F	1.7
YG802C04R	40	10 (T _c =110°C)	120	-40 to +150	0.55 (I _f =4.0A)	5	3.5	TO-220F	1.7
YG805C04R	40	20 (T _c =100°C)	120	-40 to +150	0.6 (I _f =10A)	15	2.5	TO-220F	1.7
YG838C04R	40	30 (T _c =85°C)	180	-40 to +150	0.53 (I _f =12.5A)	8	2.0	TO-220F	1.7
MS838C04	40	30 (T _c =111°C)	180	-40 to +150	0.53 (I _f =12.5A)	8	1.2	TFP	0.8
YG801C06R	60	5.0 (T _c =125°C)	60	-40 to +150	0.58 (I _f =2.0A)	5	5.0	TO-220F	1.7
YG802C06R	60	10 (T _c =118°C)	80	-40 to +150	0.58 (I _f =4.0A)	5	3.5	TO-220F	1.7
YG803C06R	60	15 (T _c =94°C)	100	-40 to +150	0.58 (I _f =6.0A)	5	3.0	TO-220F	1.7
YG805C06R	60	20 (T _c =108°C)	80	-40 to +150	0.58 (I _f =8.0A)	15	2.5	TO-220F	1.7
MS808C06	60	30 (T _c =118°C)	150	-40 to +150	0.58 (I _f =12.5A)	3	1.2	TFP	0.8
KS823C09	90	5.0 (T _c =100°C)	60	-40 to +150	0.9 (I _f =2.5A)	5	10.0	K-pack(S)	0.6
YG801C10R	100	5.0 (T _c =117°C)	60	-40 to +150	0.8 (I _f =1.5A)	0.7	5.0	TO-220F	1.7
YG802C10R	100	10 (T _c =102°C)	80	-40 to +150	0.8 (I _f =3.0A)	1.2	3.5	TO-220F	1.7
YG805C10R	100	20 (T _c =91°C)	100	-40 to +150	0.8 (I _f =5.0A)	2.5	2.5	TO-220F	1.7
YG808C10R	100	30 (T _c =80°C)	180	-40 to +150	0.8 (I _f =10A)	20	2.0	TO-220F	1.7

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element *3: I_f=0.5/I_O per element

*4: V_R=V_{RRM} per element



Rectifier Diodes

Ultra Low IR Schottky-Barrier Diodes

Ultra Low IR Schottky-Barrier Diodes					TO-220	TO-220F
Chip	V_{RRM} (V)	I_O (A)	V_F (V)	I_R (mA)		
Dual	100	10	0.82	0.015	✓	✓
		20	0.86	0.02	✓	✓
		30	0.86	0.03	✓	✓
	120	10	0.84	0.015	✓	✓
		20	0.88	0.02	✓	✓
		30	0.88	0.03	✓	✓
	150	10	0.86	0.015	✓	✓
		20	0.89	0.02	✓	✓
		30	0.89	0.03	✓	✓
	200	10	0.89	0.015	✓	✓
		20	0.93	0.02	✓	✓
		30	0.93	0.03	✓	✓

2 in one-package

Device type	Maximum rating V_{RRM} Volts	I_O *1 Amps.	I_{FSM} *2 Amps.	Thermal rating T_{vj} and T_{stg} °C	Characteristics ($T_a=25^\circ\text{C}$) V_{FM} *3 max. Volts	I_{RRM} *4 max.mA	$R_{th(j-c)}$ °C/W	Package	Net mass Grams
YG872C10R	100	10 ($T_c=146^\circ\text{C}$)	125	-40 to +175	0.82	0.015	3.5	TO-220F	1.7
YA872C10R	100	10 ($T_c=158^\circ\text{C}$)	125	-40 to +175	0.82	0.015	2.0	TO-220	2.0
YG875C10R	100	20 ($T_c=131^\circ\text{C}$)	145	-40 to +175	0.86	0.020	2.5	TO-220F	1.7
YA875C10R	100	20 ($T_c=144^\circ\text{C}$)	145	-40 to +175	0.86	0.020	1.75	TO-220	2.0
YG878C10R	100	30 ($T_c=122^\circ\text{C}$)	160	-40 to +175	0.86	0.030	2.0	TO-220F	1.7
YA878C10R	100	30 ($T_c=142^\circ\text{C}$)	160	-40 to +175	0.86	0.030	1.25	TO-220	2.0
YG872C12R	120	10 ($T_c=143^\circ\text{C}$)	125	-40 to +175	0.84	0.015	3.5	TO-220F	1.7
YA872C12R	120	10 ($T_c=158^\circ\text{C}$)	125	-40 to +175	0.84	0.015	2.0	TO-220	2.0
YG875C12R	120	20 ($T_c=127^\circ\text{C}$)	145	-40 to +175	0.88	0.020	2.5	TO-220F	1.7
YA875C12R	120	20 ($T_c=144^\circ\text{C}$)	145	-40 to +175	0.88	0.020	1.75	TO-220	2.0
YG878C12R	120	30 ($T_c=116^\circ\text{C}$)	160	-40 to +175	0.88	0.030	2.0	TO-220F	1.7
YA878C12R	120	30 ($T_c=141^\circ\text{C}$)	160	-40 to +175	0.88	0.030	1.25	TO-220	2.0
YG872C15R	150	10 ($T_c=144^\circ\text{C}$)	125	-40 to +175	0.86	0.015	3.5	TO-220F	1.7
YA872C15R	150	10 ($T_c=157^\circ\text{C}$)	125	-40 to +175	0.86	0.015	2.0	TO-220	2.0
YG875C15R	150	20 ($T_c=130^\circ\text{C}$)	145	-40 to +175	0.89	0.020	2.5	TO-220F	1.7
YA875C15R	150	20 ($T_c=143^\circ\text{C}$)	145	-40 to +175	0.89	0.020	1.75	TO-220	2.0
YG878C15R	150	30 ($T_c=120^\circ\text{C}$)	160	-40 to +175	0.89	0.030	2.0	TO-220F	1.7
YA878C15R	150	30 ($T_c=140^\circ\text{C}$)	160	-40 to +175	0.89	0.030	1.25	TO-220	2.0
YG872C20R	200	10 ($T_c=143^\circ\text{C}$)	125	-40 to +175	0.89	0.015	3.5	TO-220F	1.7
YA872C20R	200	10 ($T_c=157^\circ\text{C}$)	125	-40 to +175	0.89	0.015	2.0	TO-220	2.0
YG875C20R	200	20 ($T_c=127^\circ\text{C}$)	145	-40 to +175	0.93	0.020	2.5	TO-220F	1.7
YA875C20R	200	20 ($T_c=141^\circ\text{C}$)	145	-40 to +175	0.93	0.020	1.75	TO-220	2.0
YG878C20R	200	30 ($T_c=116^\circ\text{C}$)	160	-40 to +175	0.93	0.030	2.0	TO-220F	1.7
YA878C20R	200	30 ($T_c=138^\circ\text{C}$)	160	-40 to +175	0.93	0.030	1.25	TO-220	2.0

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element *3: $I_F = 0.5 I_O$ per element

*4: $V_R = V_{RRM}$ per element

■ Low IR Schottky-Barrier Diodes

Low IR Schottky-Barrier Diodes					TO-220	TO-220F	TO-3P (Q)	TO-3PF	TO-247	T-Pack(L)	T-Pack(S)	TFP
Chip	V _{RRM} (V)	I _O (A)	V _F (V)	I _R (mA)								
Single	120	5	0.88	0.15		✓						
	150	5	0.9	0.15		✓						
Dual	45	20	0.63	0.175	✓	✓					✓	✓
		30	0.63	0.2	✓	✓					✓	✓
	60	10	0.68	0.15	✓	✓					✓	
		20	0.74	0.175	✓	✓					✓	
		30	0.74	0.2	✓	✓					✓	
		40	0.7	0.2	✓	✓					✓	
		80	10	0.76	0.15	✓	✓				✓	✓
		20	0.76	0.175	✓	✓					✓	✓
		30	0.76	0.2	✓	✓					✓	
		40	0.71	0.2	✓	✓					✓	
	100	10	0.86	0.15	✓	✓					✓	
		20	0.86	0.175	✓	✓					✓	✓
		30	0.86	0.2	✓	✓	✓				✓	✓
		40	0.82	0.2	✓	✓					✓	
120	10	0.88	0.15	✓	✓						✓	✓
	20	0.88	0.15	✓	✓						✓	✓
	30	0.88	0.2	✓	✓						✓	✓
	30	1.01	0.2									
	40	0.95	0.2	✓	✓							
150	10	0.9	0.15	✓	✓						✓	✓
	20	0.9	0.15	✓	✓						✓	✓
	30	0.9	0.2	✓	✓						✓	✓
	40	0.97	0.2	✓	✓						✓	✓

1 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O * ¹ Amps.	I _{FSM} * ² Amps.	Thermal rating T _{VJ} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} * ³ max. Volts	I _{RRM} * ⁴ max.mA	R _{th (j-c)} °C/W	Package	Net mass Grams
YG861S12R	120	5 (T _c =104°C)	75	-40 to +150	0.88	0.15	5.0	TO-220F	1.7
YG861S15R	150	5 (T _c =94°C)	75	-40 to +150	0.90	0.15	5.0	TO-220F	1.7

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms *3: I_F=I_O

*4: V_R=V_{RRM}



Rectifier Diodes

■ Low IR Schottky-Barrier Diodes

2 in one-package

Device type	Maximum rating			Thermal rating T _{Vj} and T _{stg} °C	Characteristics (T _a =25°C)			Package	Net mass Grams
	V _{RRM} Volts	I _O ^{*1} Amps.	I _{FSM} ^{*2} Amps.		V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max.mA	R _{th(j-c)} °C/W		
YG865C04R	45	20 (T _c =115°C)	145	-40 to +150	0.63	0.175	2.5	TO-220F	1.7
YA865C04R	45	20 (T _c =126°C)	145	-40 to +150	0.63	0.175	1.75	TO-220	2.0
TS865C04R	45	20 (T _c =126°C)	145	-40 to +150	0.63	0.175	1.75	T-pack(S)	1.6
MS865C04	45	20 (T _c =125°C)	145	-40 to +150	0.63	0.175	1.75	TFP	0.8
YG868C04R	45	30 (T _c =105°C)	160	-40 to +150	0.63	0.20	2.0	TO-220F	1.7
YA868C04R	45	30 (T _c =122°C)	160	-40 to +150	0.63	0.20	1.25	TO-220	2.0
TS868C04R	45	30 (T _c =122°C)	160	-40 to +150	0.63	0.20	1.25	T-pack(S)	1.6
MS868C04	45	30 (T _c =122°C)	160	-40 to +150	0.63	0.20	1.25	TFP	0.8
YG862C06R	60	10 (T _c =124°C)	125	-40 to +150	0.68	0.15	3.5	TO-220F	1.7
YA862C06R	60	10 (T _c =136°C)	125	-40 to +150	0.68	0.15	2.0	TO-220	2.0
TS862C06R	60	10 (T _c =136°C)	125	-40 to +150	0.68	0.15	2.0	T-pack(S)	1.6
YG865C06R	60	20 (T _c =109°C)	145	-40 to +150	0.74	0.175	2.5	TO-220F	1.7
YA865C06R	60	20 (T _c =122°C)	145	-40 to +150	0.74	0.175	1.75	TO-220	2.0
TS865C06R	60	20 (T _c =122°C)	145	-40 to +150	0.74	0.175	1.75	T-pack(S)	1.6
YG868C06R	60	30 (T _c =101°C)	160	-40 to +150	0.74	0.20	2.0	TO-220F	1.7
YA868C06R	60	30 (T _c =119°C)	160	-40 to +150	0.74	0.20	1.25	TO-220	2.0
TS868C06R	60	30 (T _c =119°C)	160	-40 to +150	0.74	0.20	1.25	T-pack(S)	1.6
YG869C06R	60	40 (T _c =105°C)	190	-40 to +150	0.70	0.20	1.2	TO-220F	1.7
YA869C06R	60	40 (T _c =114°C)	190	-40 to +150	0.70	0.20	1.0	TO-220	2.0
TP869C06R	60	40 (T _c =114°C)	190	-40 to +150	0.70	0.20	1.0	T-Pack(L)	1.6
YG862C08R	80	10 (T _c =109°C)	125	-40 to +150	0.76	0.15	3.5	TO-220F	1.7
YA862C08R	80	10 (T _c =126°C)	125	-40 to +150	0.76	0.15	2.0	TO-220	2.0
TS862C08R	80	10 (T _c =126°C)	125	-40 to +150	0.76	0.15	2.0	T-pack(S)	1.6
MS862C08	80	10 (T _c =115°C)	125	-40 to +150	0.76	0.15	3.0	TFP	0.8
YG865C08R	80	20 (T _c =89°C)	145	-40 to +150	0.76	0.175	2.5	TO-220F	1.7
YA865C08R	80	20 (T _c =107°C)	145	-40 to +150	0.76	0.175	1.75	TO-220	2.0
TS865C08R	80	20 (T _c =107°C)	145	-40 to +150	0.76	0.175	1.75	T-pack(S)	1.6
MS865C08	80	20 (T _c =108°C)	145	-40 to +150	0.76	0.175	1.75	TFP	0.8
YG868C08R	80	30 (T _c =72°C)	160	-40 to +150	0.76	0.20	2.0	TO-220F	1.7
YA868C08R	80	30 (T _c =105°C)	160	-40 to +150	0.76	0.20	1.25	TO-220	2.0
TS868C08R	80	30 (T _c =105°C)	160	-40 to +150	0.76	0.20	1.25	T-pack(S)	1.6
YG869C08R	80	40 (T _c =86°C)	190	-40 to +150	0.71	0.20	1.2	TO-220F	1.7
YA869C08R	80	40 (T _c =98°C)	190	-40 to +150	0.71	0.20	1.0	TO-220	2.0
TP869C08R	80	40 (T _c =98°C)	190	-40 to +150	0.71	0.20	1.0	T-Pack(L)	1.6

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element

*3: I_f=0.5/I_O per element

*4: V_R=V_{RRM} per element

■ Low IR Schottky-Barrier Diodes

2 in one-package

Device type	Maximum rating			Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C)			Package	Net mass Grams
	V _{RRM} Volts	I _O * ¹ Amps.	I _{FSM} * ² Amps.		V _{FM} * ³ max. Volts	I _{RRM} * ⁴ max. mA	R _{th(j-c)} °C/W		
YG862C10R	100	10 (T _c =118°C)	125	-40 to +150	0.86	0.15	3.5	TO-220F	1.7
YA862C10R	100	10 (T _c =132°C)	125	-40 to +150	0.86	0.15	2.0	TO-220	2.0
TS862C10R	100	10 (T _c =132°C)	125	-40 to +150	0.86	0.15	2.0	T-pack(S)	1.6
YG865C10R	100	20 (T _c =103°C)	145	-40 to +150	0.86	0.175	2.5	TO-220F	1.7
YA865C10R	100	20 (T _c =117°C)	145	-40 to +150	0.86	0.175	1.75	TO-220	2.0
TS865C10R	100	20 (T _c =117°C)	145	-40 to +150	0.86	0.175	1.75	T-pack(S)	1.6
MS865C10	100	20 (T _c =117°C)	145	-40 to +150	0.86	0.175	1.75	TFP	0.8
YG868C10R	100	30 (T _c =91°C)	160	-40 to +150	0.86	0.20	2.0	TO-220F	1.7
YA868C10R	100	30 (T _c =113°C)	160	-40 to +150	0.86	0.20	1.25	TO-220	2.0
TS868C10R	100	30 (T _c =113°C)	160	-40 to +150	0.86	0.20	1.25	T-pack(S)	1.6
TP868C10R	100	30 (T _c =113°C)	160	-40 to +150	0.86	0.20	1.25	T-Pack(L)	1.6
MS868C10	100	30 (T _c =114°C)	160	-40 to +150	0.86	0.20	1.2	TFP	0.8
PA868C10R	100	30 (T _c =107°C)	160	-40 to +150	0.86	0.20	1.5	TO-3P(Q)	5.1
YG869C10R	100	40 (T _c =94°C)	190	-40 to +150	0.82	0.20	1.2	TO-220F	1.7
YA869C10R	100	40 (T _c =105°C)	190	-40 to +150	0.82	0.20	1.0	TO-220	2.0
TP869C10R	100	40 (T _c =105°C)	190	-40 to +150	0.82	0.20	1.0	T-Pack(L)	1.6
YG862C12R	120	10 (T _c =122°C)	75	-40 to +150	0.88	0.15	3.00	TO-220F	1.7
YA862C12R	120	10 (T _c =137°C)	75	-40 to +150	0.88	0.15	1.20	TO-220	2.0
TP862C12R	120	10 (T _c =137°C)	75	-40 to +150	0.88	0.15	1.50	T-Pack(L)	1.6
TS862C12R	120	10 (T _c =137°C)	75	-40 to +150	0.88	0.15	1.50	T-pack(S)	1.6
YG865C12R	120	20 (T _c =116°C)	150	-40 to +150	0.88	0.15	1.75	TO-220F	1.7
YA865C12R	120	20 (T _c =126°C)	150	-40 to +150	0.88	0.15	1.25	TO-220	2.0
PH865C12	120	20 (T _c =126°C)	150	-40 to +150	0.88	0.15	1.50	TO-247	4.9
TP865C12R	120	20 (T _c =126°C)	150	-40 to +150	0.88	0.15	1.25	T-Pack(L)	1.6
TS865C12R	120	20 (T _c =126°C)	150	-40 to +150	0.88	0.15	1.25	T-pack(S)	1.6
MS865C12	120	20 (T _c =126°C)	150	-40 to +150	0.88	0.15	1.25	TFP	0.8
YG868C12R	120	30 (T _c =116°C)	190	-40 to +150	0.88	0.20	1.20	TO-220F	1.7
YA868C12R	120	30 (T _c =122°C)	190	-40 to +150	0.88	0.20	1.00	TO-220	2.0
PH868C12	120	30 (T _c =122°C)	190	-40 to +150	0.88	0.20	1.20	TO-247	4.9
TS868C12R	120	30 (T _c =122°C)	190	-40 to +150	0.88	0.20	1.00	T-pack(S)	1.6
MS868C12	120	30 (T _c =115°C)	190	-40 to +150	0.88	0.20	1.20	TFP	0.8
YG869C12R	120	40 (T _c =95°C)	190	-40 to +150	0.95	0.20	1.20	TO-220F	1.7
YA869C12R	120	40 (T _c =104°C)	190	-40 to +150	0.95	0.20	1.00	TO-220	2.0
YG862C15R	150	10 (T _c =117°C)	75	-40 to +150	0.90	0.15	3.00	TO-220F	1.7
YA862C15R	150	10 (T _c =134°C)	75	-40 to +150	0.90	0.15	1.50	TO-220	2.0
TP862C15R	150	10 (T _c =134°C)	75	-40 to +150	0.90	0.15	1.50	T-Pack(L)	1.6
TS862C15R	150	10 (T _c =134°C)	75	-40 to +150	0.90	0.15	1.50	T-pack(S)	1.6
YG865C15R	150	20 (T _c =101°C)	150	-40 to +150	0.90	0.15	1.75	TO-220F	1.7
PH865C15	150	20 (T _c =109°C)	150	-40 to +150	0.90	0.15	1.50	TO-247	4.9
PG865C15R	150	20 (T _c =80°C)	150	-40 to +150	0.90	0.15	2.50	TO-3PF	6.0
YA865C15R	150	20 (T _c =115°C)	150	-40 to +150	0.90	0.15	1.25	TO-220	2.0
TP865C15R	150	20 (T _c =115°C)	150	-40 to +150	0.90	0.15	1.25	T-Pack(L)	1.6
TS865C15R	150	20 (T _c =115°C)	150	-40 to +150	0.90	0.15	1.25	T-pack(S)	1.6
MS865C15	150	20 (T _c =115°C)	150	-40 to +150	0.90	0.15	1.25	TFP	0.8
YG868C15R	150	30 (T _c =113°C)	190	-40 to +150	0.90	0.20	1.20	TO-220F	1.7
YA868C15R	150	30 (T _c =119°C)	190	-40 to +150	0.90	0.20	1.00	TO-220	2.0
TS868C15R	150	30 (T _c =119°C)	190	-40 to +150	0.90	0.20	1.00	T-pack(S)	1.6
MS868C15	150	30 (T _c =113°C)	190	-40 to +150	0.90	0.20	1.20	TFP	0.8
PA868C15R	150	30 (T _c =129°C)	190	-40 to +150	0.90	0.20	1.20	TO-3P	5.5
PH868C15	150	30 (T _c =129°C)	190	-40 to +150	0.90	0.20	1.20	TO-247	4.9
YG869C15R	150	40 (T _c =90°C)	190	-40 to +150	0.97	0.20	1.20	TO-220F	1.7
YA869C15R	150	40 (T _c =100°C)	190	-40 to +150	0.97	0.20	1.00	TO-220	2.0

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element

*3: I_f=0.5I_o per element

*4: V_R=V_{RRM} per element



Rectifier Diodes

■ Super LLD 2 (Critical mode PFC)

Super LLD 2 (Critical mode PFC)						TO-220	TO-220F	TO-247
Chip	V_{RRM} (V)	I_o (A)	V_F (V)	$I_R(\mu A)$	t_{rr} (μsec)			
Single	600	8	1.55	10	0.05	✓	✓	
		10	1.55	10	0.05	✓	✓	
	800	5	2.2	10	0.05		✓	
Dual	600	10	1.55	10	0.05	✓	✓	✓

1 in one-package

Device type	Maximum rating V_{RRM} Volts	I_o *1 Amps.	I_{FSM} *2 Amps.	Thermal rating T_{vj} and T_{stg} °C	Characteristics ($T_a=25^\circ C$) V_{FM} max. Volts	I_{RRM} *3 max. μA	t_{rr} *4 μ sec.	$R_{th(j-c)}$ °C/W	Package	Net mass Grams
YA971S6R	600	8 ($T_c=116^\circ C$)	70	-40 to +150	1.55 ($I_F=8A$)	10	0.05	2.5	TO-220	2.0
YG971S6R	600	8 ($T_c=89^\circ C$)	70	-40 to +150	1.55 ($I_F=8A$)	10	0.05	4.5	TO-220F	1.7
YA972S6R	600	10 ($T_c=115^\circ C$)	100	-40 to +150	1.55 ($I_F=10A$)	10	0.05	2.0	TO-220	2.0
YG972S6R	600	10 ($T_c=89^\circ C$)	100	-40 to +150	1.55 ($I_F=10A$)	10	0.05	3.5	TO-220F	1.7
YG971S8R	800	5 ($T_c=93^\circ C$)	60	-40 to +150	2.2 ($I_F=5A$)	10	0.05	4.5	TO-220F	1.7

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms *3: $V_R=V_{RRM}$

*4: $I_F=0.1A$, $I_R=0.2A$, $I_{rec}=0.05A$

2 in one-package

Device type	Maximum rating V_{RRM} Volts	I_o *1 Amps.	I_{FSM} *2 Amps.	Thermal rating T_{vj} and T_{stg} °C	Characteristics ($T_a=25^\circ C$) V_{FM} max. Volts	I_{RRM} *3 max. μA	t_{rr} *4 μ sec.	$R_{th(j-c)}$ °C/W	Package	Net mass Grams
YA975C6R	600	20 ($T_c=106^\circ C$)	100	-40 to +150	1.55 ($I_F=10A$)	10	0.05	1.25	TO-220	2.0
YG975C6R	600	20 ($T_c=89^\circ C$)	100	-40 to +150	1.55 ($I_F=10A$)	10	0.05	1.75	TO-220F	1.7
PH975C6	600	20 ($T_c=97^\circ C$)	100	-40 to +150	1.55 ($I_F=10A$)	10	0.05	1.5	TO-247	4.9

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element *3: $V_R=V_{RRM}$ per element

*4: $I_F=0.1A$, $I_R=0.2A$, $I_{rec}=0.05A$

■ Super LLD 3 (Continuous mode PFC)

Super LLD 3 (Continuous mode PFC)					TO-220	TO-220F	TO-247	T-Pack (S)
Chip	V _{RRM} (V)	I _O (A)	V _F (V)	I _R (μA)	t _{rr} (μsec)			
Single	600	8	3	25	0.026	✓	✓	
		10	3	30	0.028	✓	✓	
Dual	600	16	3	25	0.026	✓	✓	✓
		20	3	30	0.028	✓	✓	✓

1 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O *1 Amps.	I _{FSM} *2 Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} max. Volts	I _{RRM} *3 max. μA	t _{rr} *4 μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
YA981S6R	600	8 (T _c =99°C)	40	-40 to +150	3.0 (I _f =8A)	25	0.026	2.5	TO-220	2.0
YG981S6R	600	8 (T _c =58°C)	40	-40 to +150	3.0 (I _f =8A)	25	0.026	4.5	TO-220F	1.7
YA982S6R	600	10 (T _c =99°C)	50	-40 to +150	3.0 (I _f =10A)	30	0.028	2.0	TO-220	2.0
YG982S6R	600	10 (T _c =60°C)	50	-40 to +150	3.0 (I _f =10A)	30	0.028	3.5	TO-220F	1.7

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms

*3: V_R=V_{RRM}

*4: I_f=0.1A, I_R=0.2A, I_{rec}=0.05A

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O *1 Amps.	I _{FSM} *2 Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} max. Volts	I _{RRM} *3 max. μA	t _{rr} *4 μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
YA982C6R	600	16 (T _c =88°C)	40	-40 to +150	3.0 (I _f =8A)	25	0.026	1.5	TO-220	2.0
TS982C6R	600	16 (T _c =88°C)	40	-40 to +150	3.0 (I _f =8A)	25	0.026	1.5	T-pack(S)	1.6
YG982C6R	600	16 (T _c =68°C)	40	-40 to +150	3.0 (I _f =8A)	25	0.026	2	TO-220F	1.7
YA985C6R	600	20 (T _c =86°C)	50	-40 to +150	3.0 (I _f =10A)	30	0.028	1.25	TO-220	2.0
TS985C6R	600	20 (T _c =86°C)	50	-40 to +150	3.0 (I _f =10A)	30	0.028	1.25	T-pack(S)	1.6
YG985C6R	600	20 (T _c =60°C)	50	-40 to +150	3.0 (I _f =10A)	30	0.028	1.75	TO-220F	1.7
PH985C6	600	20 (T _c =73°C)	50	-40 to +150	3.0 (I _f =10A)	30	0.028	1.5	TO-247	4.9

() Conditions

*1: 50Hz Square wave duty 1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element *3: V_R=V_{RRM} per element

*4: I_f=0.1A, I_R=0.2A, I_{rec}=0.05A



5 Rectifier Diodes

■ Low-Loss Fast Recovery Diodes (LLD)

Low-Loss Fast Recovery Diodes (LLD)						TO-220F	K-Pack(L)	K-Pack(S)	TFP
Chip	V _{RRM} (V)	I _O (A)	V _F (V)	I _R (μA)	t _{rr} (μsec)				
Single	200	5	0.95	100	0.035	✓	✓	✓	
		10	0.98	200	0.035	✓			
	300	5	1.2	100	0.035	✓			
Dual	200	5	0.95	100	0.035	✓	✓	✓	
		10	0.95	100	0.035	✓			
		20	0.98	200	0.035	✓			✓
	300	5	1.2	100	0.035	✓			
		10	1.2	100	0.035	✓			
	20	1.2	200	0.035					✓

1 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O ^{*1} Amps.	I _{FSM} ^{*2} Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max. μA	t _{rr} ^{*5} μ sec.	R _{th(j-c)} °C/W	Package	Net mass Grams
KP926S2	200	5 (T _c =106°C)	70	-40 to +150	0.95	100	0.035	10.0	K-Pack(L)	0.6
KS926S2	200	5 (T _c =106°C)	70	-40 to +150	0.95	100	0.035	10.0	K-pack(S)	0.6
YG911S2R	200	5 (T _c =134°C)	50	-40 to +150	0.95	100	0.035	3.5	TO-220F	1.7
YG912S2R	200	10 (T _c =116°C)	80	-40 to +150	0.98	200	0.035	3.5	TO-220F	1.7
YG911S3R	300	5 (T _c =128°C)	40	-40 to +150	1.2	100	0.035	3.5	TO-220F	1.7

() Conditions

*1: 50Hz Square wave duty 1/2

*2: Sine wave, 10ms

*3: I_F=I_O

*4: V_R=V_{RRM}

*5: I_F=0.1A. I_R=0.2A. I_{rec}=0.05A

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O ^{*1} Amps.	I _{FSM} ^{*2} Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max. μA	t _{rr} ^{*5} μ sec.	R _{th(j-c)} °C/W	Package	Net mass Grams
KP923C2	200	5 (T _c =103°C)	50	-40 to +150	0.95	100	0.035	10.0	K-Pack(L)	0.6
KS923C2	200	5 (T _c =103°C)	50	-40 to +150	0.95	100	0.035	10.0	K-pack(S)	0.6
YG901C2R	200	5 (T _c =120°C)	25	-40 to +150	0.95	100	0.035	5.0	TO-220F	1.7
YG902C2R	200	10 (T _c =115°C)	50	-40 to +150	0.95	100	0.035	3.5	TO-220F	1.7
YG906C2R	200	20 (T _c =102°C)	80	-40 to +150	0.98	200	0.035	2.5	TO-220F	1.7
MS906C2	200	20 (T _c =105°C)	80	-40 to +150	0.98	200	0.035	2.0	TFP	0.8
YG901C3R	300	5 (T _c =105°C)	25	-40 to +150	1.2	100	0.035	5.0	TO-220F	1.7
YG902C3R	300	10 (T _c =101°C)	40	-40 to +150	1.2	100	0.035	3.5	TO-220F	1.7
MS906C3	300	20 (T _c =95°C)	80	-40 to +150	1.2	200	0.035	2.0	TFP	0.8

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element

*3: I_F=0.5/I_O per element

*4: V_R=V_{RRM} per element

*5: I_F=0.1A. I_R=0.2A. I_{rec}=0.05A

■ Low-Loss Fast Soft Recovery Diodes (LLD)

Low-Loss Fast Soft Recovery Diodes (LLD)						TO-220	TO-220F	TO-3PF	T-Pack (S)	K-Pack (S)	TFP
Chip	V _{RRM} (V)	I _o (A)	V _F (V)	I _R (μA)	t _{rr} (μsec)						
Single	300	5	1.3	20	0.04					✓	
	400	5	1.45	20	0.05					✓	
Dual	300	10	1.3	20	0.04	✓	✓		✓		
		20	1.3	35	0.04	✓	✓	✓	✓		✓
	400	10	1.45	20	0.05	✓	✓		✓		
		20	1.45	35	0.05	✓	✓	✓	✓		✓

1 in one-package

Device type	Maximum rating V _{RRM} Volts	I _o ^{*1} Amps.	I _{FSM} ^{*2} Amps.	Thermal rating T _{Vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max. μA	t _{rr} ^{*5} μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
KS986S3	300	5 (T _c =128°C)	90	-40 to +150	1.3	20	0.04	3.5	K-pack(S)	0.6
KS986S4	400	5 (T _c =125°C)	80	-40 to +150	1.45	20	0.05	3.5	K-pack(S)	0.6

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms per element

*3: I_f=I_o per element *4: V_R=V_{RRM}

*5: I_f=0.1A. I_R=0.2A. I_{rec}=0.05A

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _o ^{*1} Amps.	I _{FSM} ^{*2} Amps.	Thermal rating T _{Vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max. μA	t _{rr} ^{*5} μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
YG982C3R	300	10 (T _c =112°C)	90	-40 to +150	1.3	20	0.04	3	TO-220F	1.7
YA982C3R	300	10 (T _c =128°C)	90	-40 to +150	1.3	20	0.04	1.75	TO-220	2.0
TS982C3R	300	10 (T _c =128°C)	90	-40 to +150	1.3	20	0.04	1.75	T-pack(S)	1.6
YG985C3R	300	20 (T _c =105°C)	110	-40 to +150	1.3	35	0.04	1.75	TO-220F	1.7
YA985C3R	300	20 (T _c =118°C)	110	-40 to +150	1.3	35	0.04	1.25	TO-220	2.0
TS985C3R	300	20 (T _c =118°C)	110	-40 to +150	1.3	35	0.04	1.25	T-pack(S)	1.6
MS985C3	300	20 (T _c =118°C)	110	-40 to +150	1.3	35	0.04	1.25	TFP	0.8
PG985C3R	300	20 (T _c =73°C)	110	-40 to +150	1.3	35	0.04	3	TO-3PF	6.0
YG982C4R	400	10 (T _c =107°C)	80	-40 to +150	1.45	20	0.05	3	TO-220F	1.7
YA982C4R	400	10 (T _c =125°C)	80	-40 to +150	1.45	20	0.05	1.75	TO-220	2.0
TS982C4R	400	10 (T _c =125°C)	80	-40 to +150	1.45	20	0.05	1.75	T-pack(S)	1.6
YG985C4R	400	20 (T _c =100°C)	100	-40 to +150	1.45	35	0.05	1.75	TO-220F	1.7
YA985C4R	400	20 (T _c =114°C)	100	-40 to +150	1.45	35	0.05	1.25	TO-220	2.0
TS985C4R	400	20 (T _c =114°C)	100	-40 to +150	1.45	35	0.05	1.25	T-pack(S)	1.6
MS985C4	400	20 (T _c =114°C)	100	-40 to +150	1.45	35	0.05	1.25	TFP	0.8
PG985C4R	400	20 (T _c =64°C)	100	-40 to +150	1.45	35	0.05	3	TO-3PF	6.0

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element

*3: I_f=0.5I_o per element

*4: V_R=V_{RRM} per element

*5: I_f=0.1A. I_R=0.2A. I_{rec}=0.05A



5 Rectifier Diodes

Schottky-Barrier Diodes (SBD)

Schottky-Barrier Diodes (SBD)					TO-3P(Q)	TO-3PF	T-Pack (S)	T-Pack (L)
Chip	V _{RRM} (V)	I _o (A)	V _F (V)	I _R (mA)				
Dual	40	10	0.55	5			✓	✓
		20	0.6	15			✓	
		30	0.55	20	✓	✓		
	60	30	0.58	20	✓	✓	✓	

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _o ^{*1} Amps.	I _{FSM} ^{*2} Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max. mA	R _{th} (j-c) °C/W	Package	Net mass Grams
TP802C04R	40	10 (T _c =116°C)	120	-40 to +150	0.55 (I _f =4.0A)	5	3.0	T-Pack(L)	1.6
TS802C04R	40	10 (T _c =116°C)	120	-40 to +150	0.55 (I _f =4.0A)	5	3.0	T-pack(S)	1.6
TS805C04R	40	20 (T _c =110°C)	120	-40 to +150	0.6 (I _f =10A)	15	2.0	T-pack(S)	1.6
ESAD83M-004RR	40	30 (T _c =105°C)	150	-40 to +150	0.55 (I _f =12.5A)	20	1.7	TO-3PF	6.0
ESAD83-004R	40	30 (T _c =118°C)	150	-40 to +150	0.55 (I _f =12.5A)	20	1.2	TO-3P	5.5
ESAD83M-006RR	60	30 (T _c =106°C)	120	-40 to +150	0.58 (I _f =12.5A)	20	1.7	TO-3PF	6.0
TS808C06R	60	30 (T _c =115°C)	120	-40 to +150	0.58 (I _f =12.5A)	20	1.2	T-pack(S)	1.6
ESAD83-006R	60	30 (T _c =119°C)	120	-40 to +150	0.58 (I _f =12.5A)	20	1.2	TO-3P	5.5

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element *3: per element

*4: V_R=V_{RRM} per element

Low-Loss Fast Recovery Diodes (LLD)

Low-Loss Fast Recovery Diodes (LLD)					TO-3P(Q)	TO-3PF	T-Pack (S)	T-Pack (L)	
Chip	V _{RRM} (V)	I _o (A)	V _F (V)	I _R (μA)	t _{rr} (μsec)				
Dual	200	5	0.95	100	0.035				✓
		10	0.95	100	0.035				✓
		20	0.95	200	0.04	✓	✓		
	20	0.98	200	0.035			✓		✓
300	10	1.2	100	0.035			✓		✓
	20	1.2	200	0.04	✓	✓			
	400	20	1.5	500	0.05	✓			

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _o ^{*1} Amps.	I _{FSM} ^{*2} Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} ^{*3} max. Volts	I _{RRM} ^{*4} max. μA	t _{rr} ^{*5} μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
TP901C2R	200	5 (T _c =120°C)	25	-40 to +150	0.95 (I _f =2.5A)	100	0.035	5.0	T-Pack(L)	1.6
TP902C2R	200	10 (T _c =125°C)	50	-40 to +150	0.95 (I _f =5A)	100	0.035	2.5	T-Pack(L)	1.6
TS902C2R	200	10 (T _c =125°C)	50	-40 to +150	0.95 (I _f =5A)	100	0.035	2.5	T-pack(S)	1.6
ESAD92M-02RR	200	20 (T _c =108°C)	100	-40 to +150	0.95 (I _f =10A)	200	0.04	2.0	TO-3PF	6.0
TP906C2R	200	20 (T _c =110°C)	80	-40 to +150	0.98 (I _f =10A)	200	0.035	2.0	T-Pack(L)	1.6
TS906C2R	200	20 (T _c =110°C)	80	-40 to +150	0.98 (I _f =10A)	200	0.035	2.0	T-pack(S)	1.6
ESAD92-02R	200	20 (T _c =115°C)	100	-40 to +150	0.95 (I _f =10A)	200	0.04	1.5	TO-3P	5.5
TP902C3R	300	10 (T _c =115°C)	40	-40 to +150	1.2 (I _f =5A)	100	0.035	2.5	T-Pack(L)	1.6
TS902C3R	300	10 (T _c =115°C)	40	-40 to +150	1.2 (I _f =5A)	100	0.035	2.5	T-pack(S)	1.6
ESAD92-03R	300	20 (T _c =110°C)	80	-40 to +150	1.2 (I _f =10A)	200	0.04	1.5	TO-3P	5.5
ESAD92M-03RR	300	20 (T _c =96°C)	80	-40 to +150	1.2 (I _f =10A)	200	0.04	2.0	TO-3PF	6.0
ESEA92-03R	300	30 (T _c =99°C)	115	-40 to +150	1.2 (I _f =15A)	300	0.04	1.2	TO-3P	5.5
ESAF92-03R	300	60 (T _c =86°C)	240	-40 to +150	1.2 (I _f =30A)	600	0.04	0.75	TO-3P	5.5
PA905C4R	400	20 (T _c =107°C)	70	-40 to +150	1.5 (I _f =10A)	500	0.05	1.5	TO-3P	5.5

() Conditions

*1: 50Hz Square wave duty=1/2 (Average forward current of centertap full wave connection)

*2: Sine wave, 10ms per element *3: per element

*4: V_R=V_{RRM} per element

*5: I_f=0.1A, I_R=0.2A, I_{rec}=0.05A

Ultra Fast Recovery Diodes

Ultra Fast Recovery Diodes						TO-220	TO-247-2L-P2	TO-247-P2	TO-247-2-P2
Chip	V _{RRM} (V)	I _O (A)	V _F (V)	I _R (μA)	t _{rr} (μsec)				
Single	600	15	2.6	250	0.031	✓	✓		
		25	2.6	250	0.033	✓	✓		
		35	2.6	250	0.036		✓		
		75	2.95	250	0.060				✓
	650	60	3.2	250	0.060				✓
Dual	600	50	2.6	250	0.033			✓	
		70	2.6	250	0.036			✓	

1 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O * ¹ Amps.	I _{FSM} * ² Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} * ³ max. Volts	I _{RRM} * ⁴ max. μA	t _{rr} * ⁵ μ sec.	R _{th(j-c)} °C/W	Package	Net mass Grams
FDRP15S60L	600	15 (T _c =98°C)	110	-40 to +150	2.6	250	0.031	1.6	TO-220	2.0
FDRW15S60L	600	15 (T _c =85°C)	110	-40 to +150	2.6	250	0.031	2.0	TO-247-2L-P2	4.9
FDRP25S60L	600	25 (T _c =86°C)	125	-40 to +150	2.6	250	0.033	1.2	TO-220	2.0
FDRW25S60L	600	25 (T _c =86°C)	125	-40 to +150	2.6	250	0.033	1.2	TO-247-2L-P2	4.9
FDRW35S60L	600	35 (T _c =91°C)	140	-40 to +150	2.6	250	0.036	0.8	TO-247-2L-P2	4.9
FDRW75T60L	600	75 (T _c =49°C)	300	-40 to +150	2.95	250	0.060	0.57	TO-247-2-P2	4.9
FDRW60T65L	650	60 (T _c =50°C)	250	-40 to +150	3.2	250	0.060	0.68	TO-247-2-P2	4.9

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms 1shot

*3: I_F=I_O

*4: V_R=V_{RRM} *5: V_R=30V, I_F=0.1 I_O, -di/dt=200A/us

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O * ¹ Amps.	I _{FSM} * ² Amps.	Thermal rating T _{vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} * ³ max. Volts	I _{RRM} * ⁴ max. μA	t _{rr} * ⁵ μ sec.	R _{th(j-c)} °C/W	Package	Net mass Grams
FDRW50C60L	600	50 (T _c =86°C)	125	-40 to +150	2.6	250	0.033	0.6	TO-247-P2	4.9
FDRW70C60L	600	70 (T _c =91°C)	140	-40 to +150	2.6	250	0.036	0.4	TO-247-P2	4.9

() Conditions

*1: 50Hz Square wave duty=1/2, Output Current of center tap full wave connection

*2: Sine wave, 10ms 1shot, Rating per element

*3: I_F=0.5 I_O, Rating per element

*4: V_R=V_{RRM}, Rating per element

*5: V_R=30V, I_F=0.05 I_O, -di/dt=200A/us, Rating per element



Rectifier Diodes

■ Soft Recovery Fast Recovery Diodes

Soft Recovery Fast Recovery Diodes						TO-247-2L-P2	TO-247-P2
Chip	V _{RRM} (V)	I _O (A)	V _F (V)	I _R (μA)	t _{rr} (μsec)		
Single	1200	12	2.8	250	0.042	✓	
		20	2.8	250	0.055	✓	
		30	2.8	250	0.063	✓	
Dual	1200	40	2.8	250	0.055		✓
		60	2.8	250	0.063		✓

1 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O *1 Amps.	I _{FSM} *2 Amps.	Thermal rating T _{Vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} *3 max. Volts	I _{RRM} *4 max. μA	t _{rr} *5 μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
FDRW12S120J	1200	12 (T _c =97°C)	100	-40 to +150	2.8	250	0.042	1.6	TO-247-2L-P2	4.9
FDRW20S120J	1200	20 (T _c =88°C)	120	-40 to +150	2.8	250	0.055	1.2	TO-247-2L-P2	4.9
FDRW30S120J	1200	30 (T _c =89°C)	150	-40 to +150	2.8	250	0.063	0.781	TO-247-2L-P2	4.9

() Conditions

*1: 50Hz Square wave duty=1/2

*2: Sine wave, 10ms 1shot *3: I_F=I_O

*4: V_R=V_{RRM} *5: V_R=30V, I_F=0.1 I_O, -di/dt=200A/us

2 in one-package

Device type	Maximum rating V _{RRM} Volts	I _O *1 Amps.	I _{FSM} *2 Amps.	Thermal rating T _{Vj} and T _{stg} °C	Characteristics (T _a =25°C) V _{FM} *3 max. Volts	I _{RRM} *4 max. μA	t _{rr} *5 μ sec.	R _{th} (j-c) °C/W	Package	Net mass Grams
FDRW40C120J	1200	40 (T _c =98°C)	120	-40 to +150	2.8	250	0.055	0.5	TO-247-P2	4.9
FDRW60C120J	1200	60 (T _c =87°C)	150	-40 to +150	2.8	250	0.063	0.397	TO-247-P2	4.9

() Conditions

*1: 50Hz Square wave duty=1/2, Output Current of center tap full wave connection

*2: Sine wave, 10ms 1shot, Rating per element *3: I_F=0.5 I_O, Rating per element

*4: V_R=V_{RRM}, Rating per element

*5: V_R=30V, I_F=0.05 I_O, -di/dt=200A/us, Rating per element

Pressure Sensors



Fuji Electric's pressure sensors combine piezo resistance, adjustment circuits, and EMC protection on single chip and contribute to reduction of system size. They operate in wide pressure range and are applicable to various uses.



Features of Pressure Sensors


- Absolute pressure measurement
- High accuracy with digital trimming
- Wide pressure range, full scale of 100kPa to 300kPa
- Provided with overvoltage protection circuit, EMC filter, and surge protective device in the sensor chip
- Surge protection conforms to ISO7637-level 3 (2011) for automotive components
- Diagnostic self-detecting function in the event of a wire opened among Vcc, Vout and GND terminals
- High reliability ensured by EPROM bit redundancy

■ Products

Device type	Max. applied voltage (kPa.abs)	Allowable voltage (V)	Operating temperature (°C)	Operating pressure (kPa.abs)	Operating voltage (V)	Output Voltage range (V)	Absolute pressure/ Relative pressure	Package
EPL4PC-R3S	500	7	-40 to 125	20 to 106.7	5.0±0.25	0.789 to 4.211	Absolute pressure	Assembly type
EPL6GC-R3S	500	7	-40 to 125	25 to 242	5.0±0.25	0.5 to 4.5	Absolute pressure	Assembly type

■ Dimensions, mm

Direct mounting type

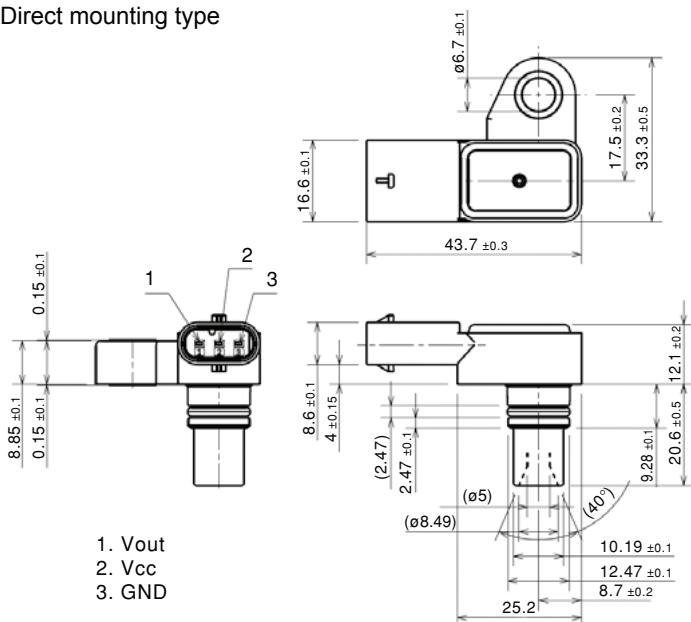


Outline


<Power devices>

Unit: mm


M151

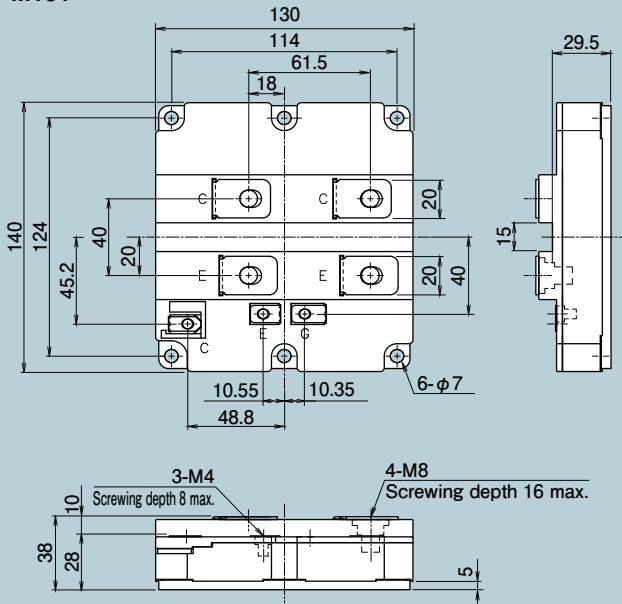


M152

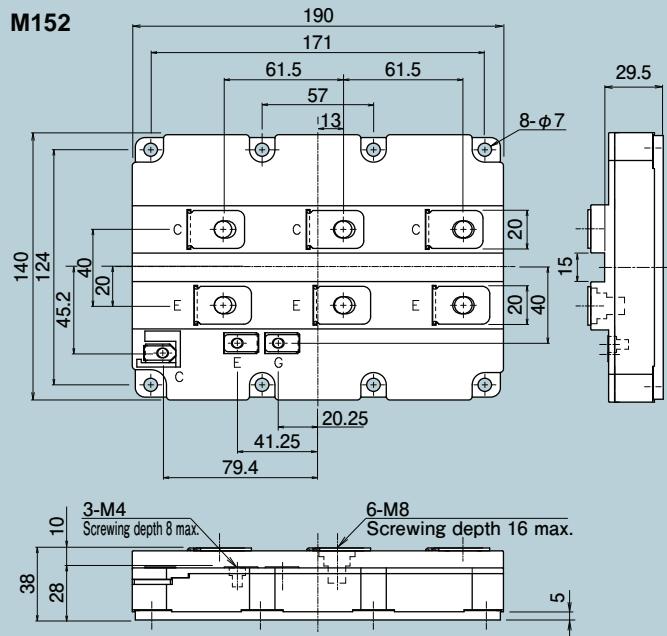


M153

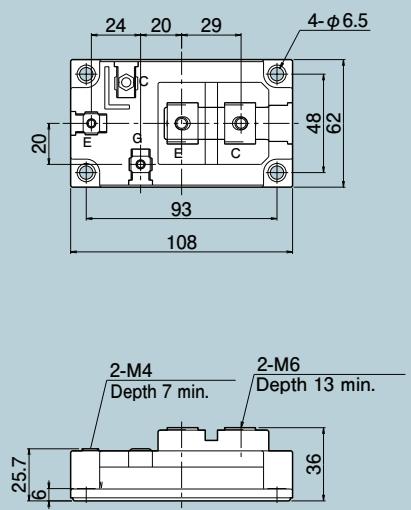



M155

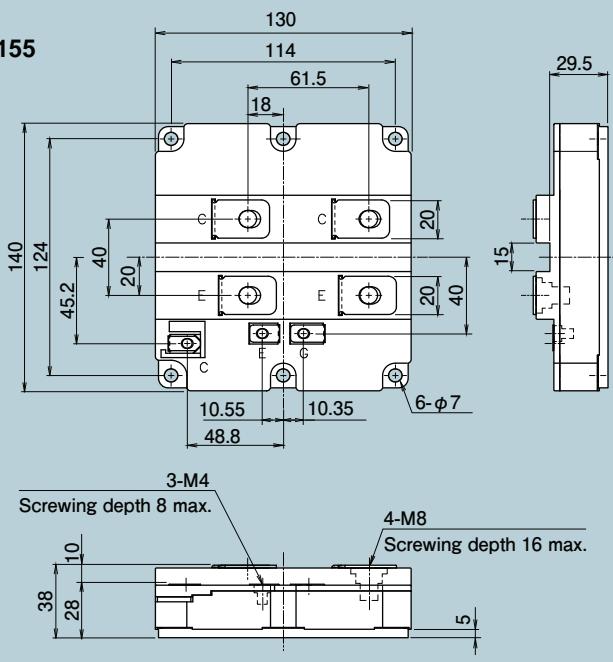



Unit: mm

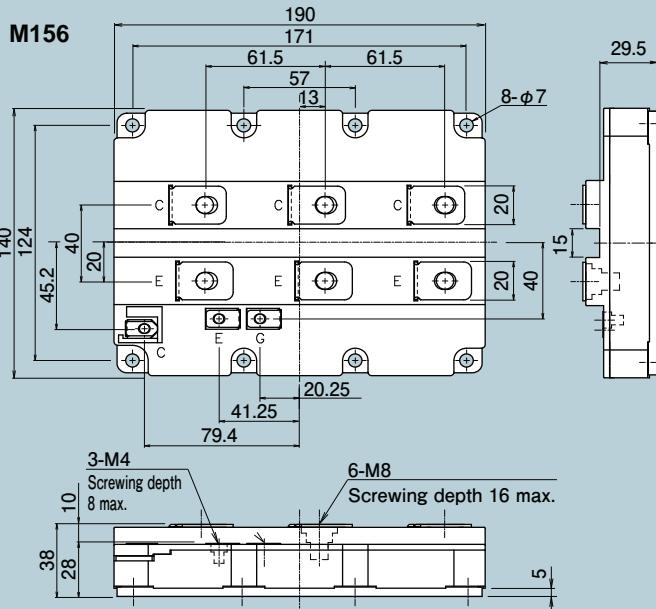



M233

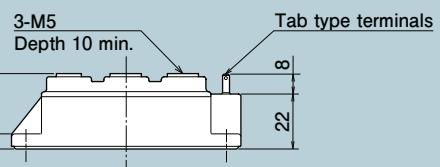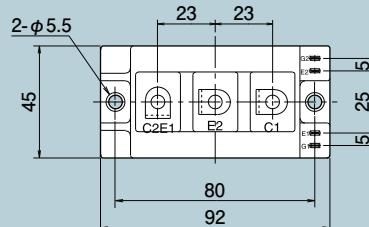



M249

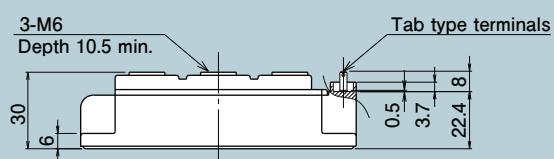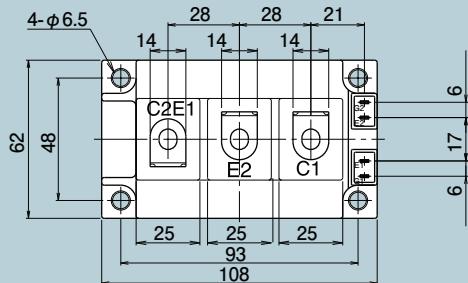

M256

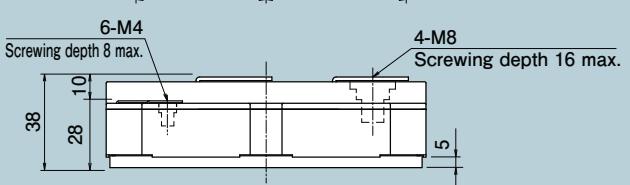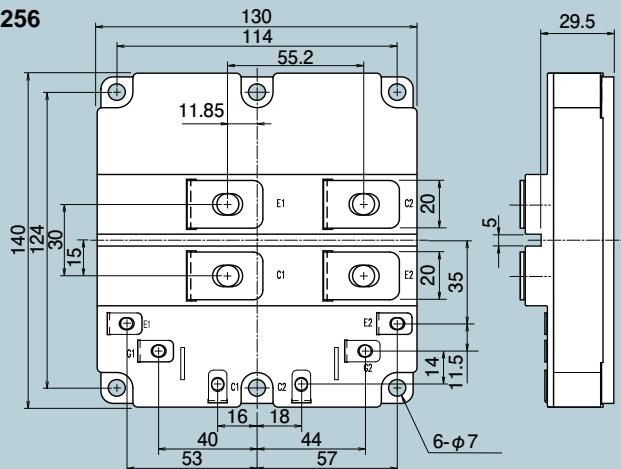


M254

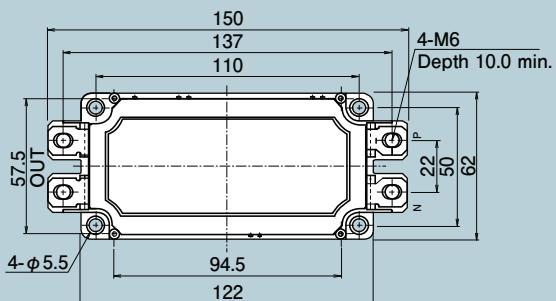


Outline

Unit: mm


M259

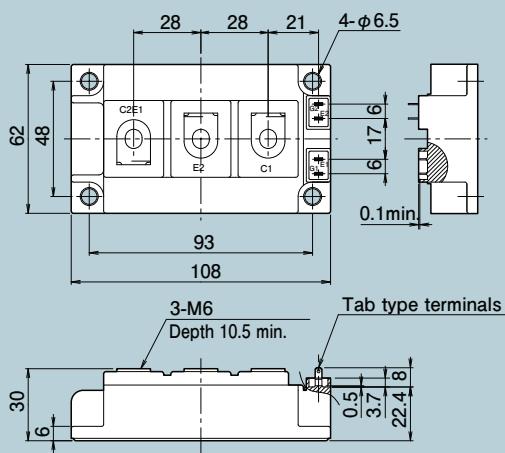


M260

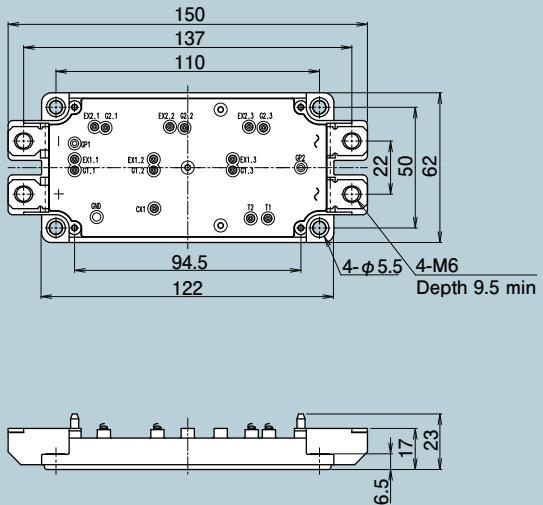


M262

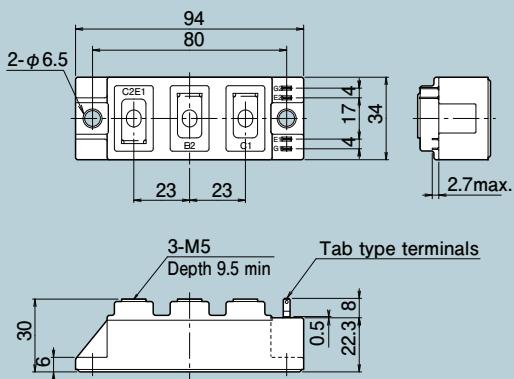


M263

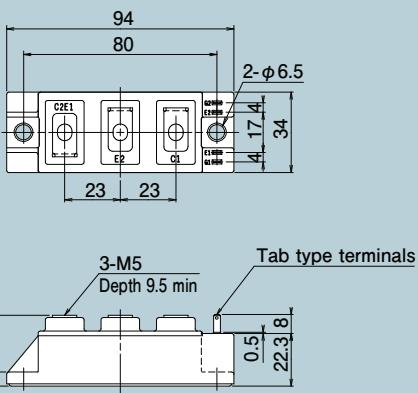

M271

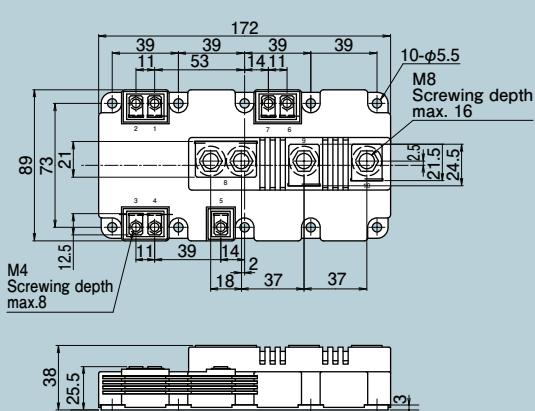


M272

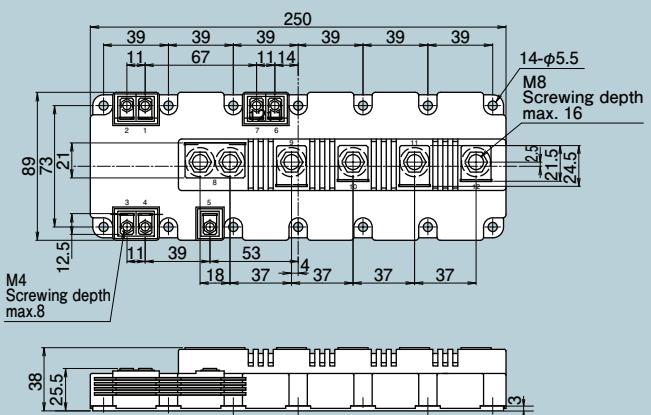


Unit: mm


M274

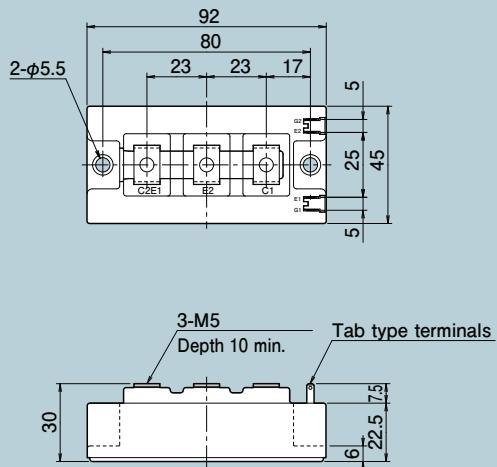


M275

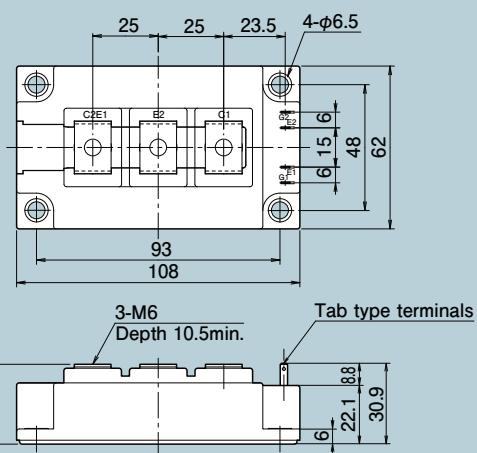


M276

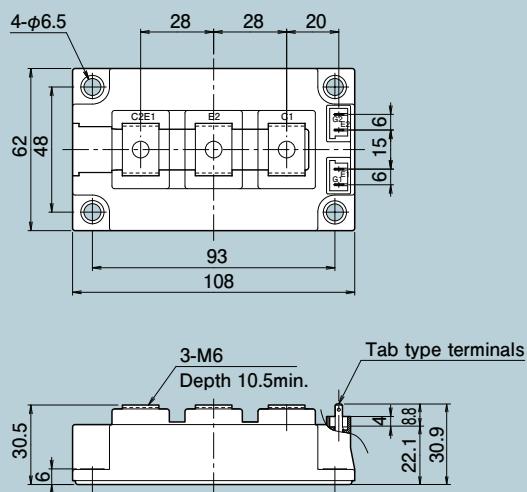


M277

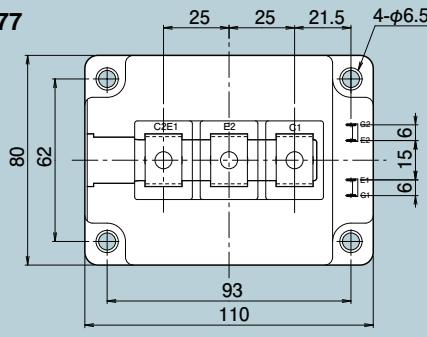

M278

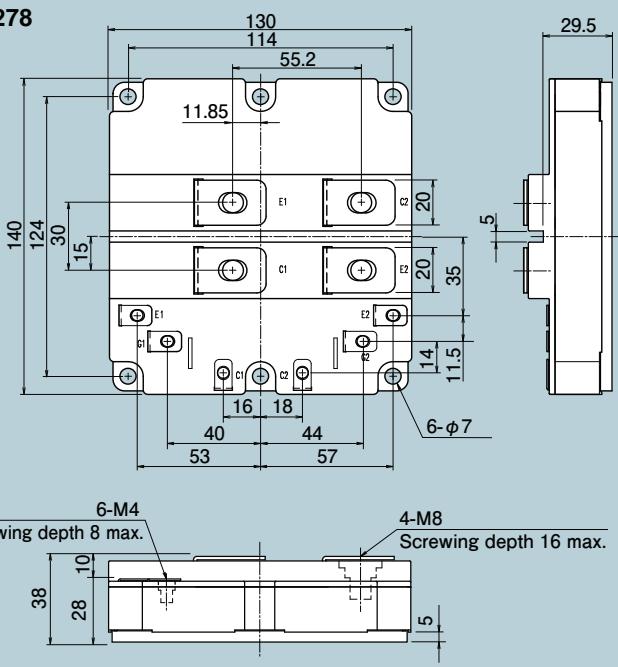

M282

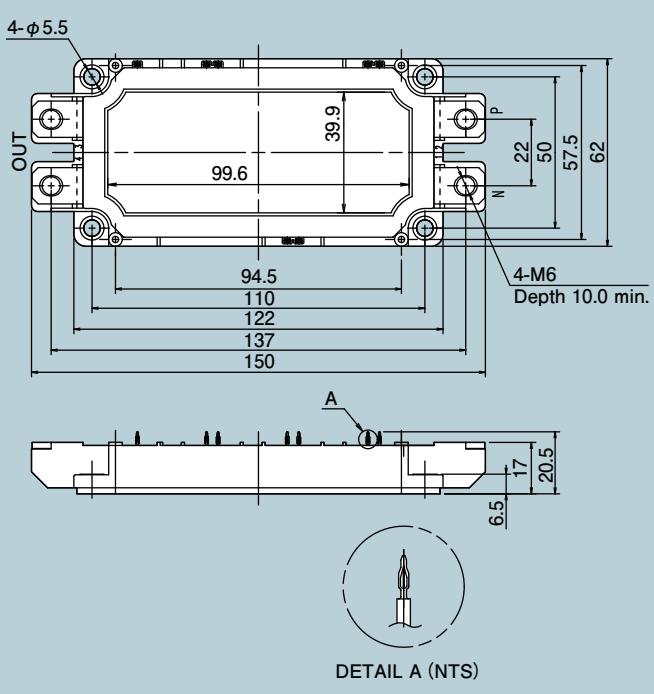


DETAIL A (NTS)


Outline

Unit: mm



M283

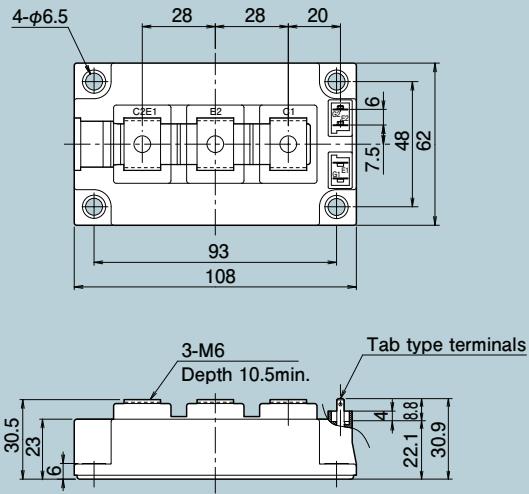


M285

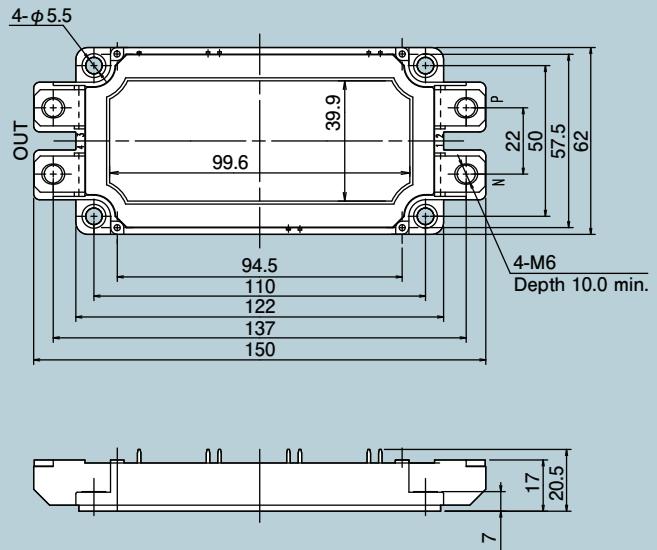

M286


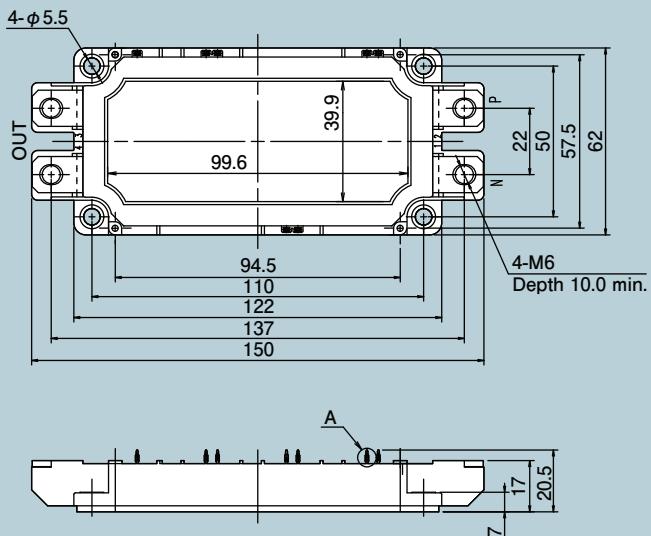


M288


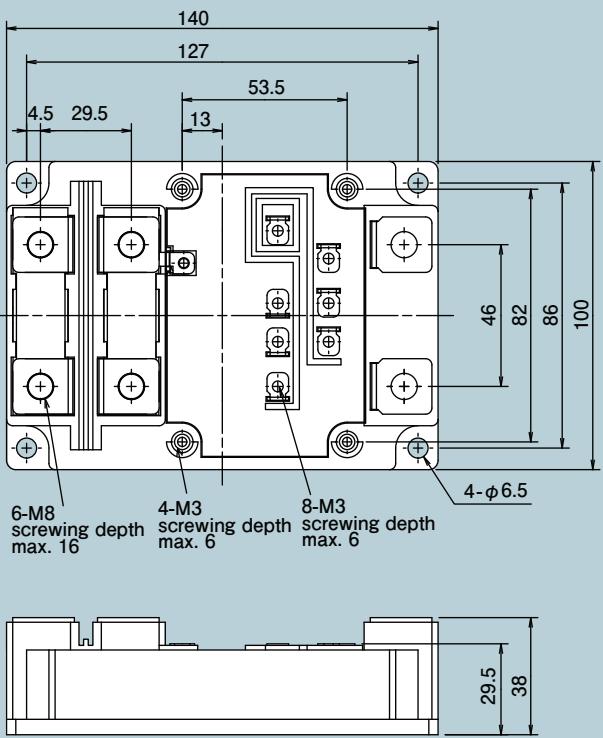


Unit: mm



M289

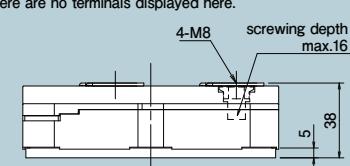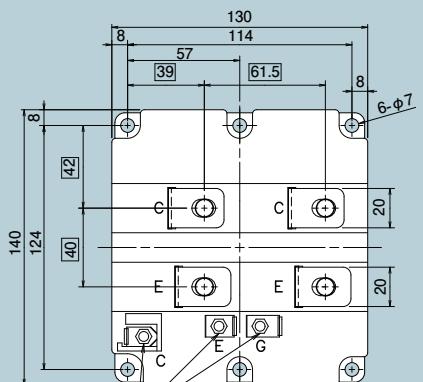


M292

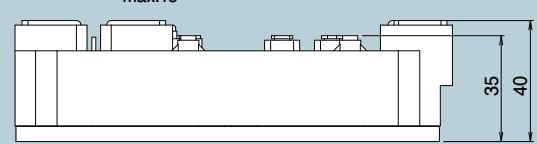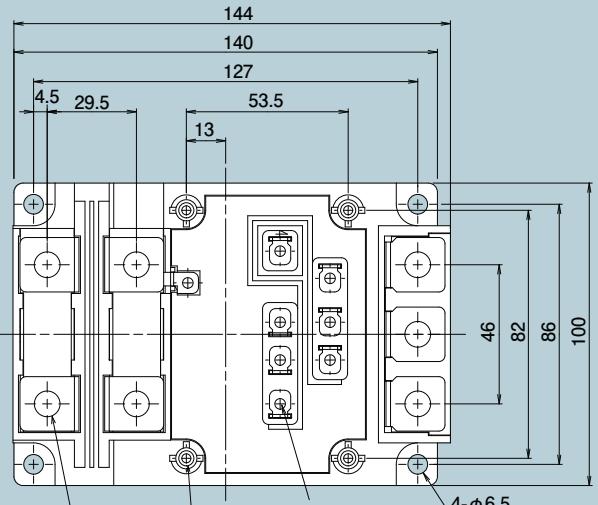

M403

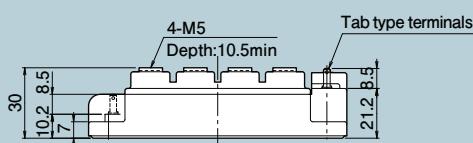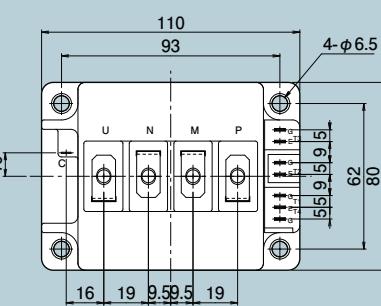


M404

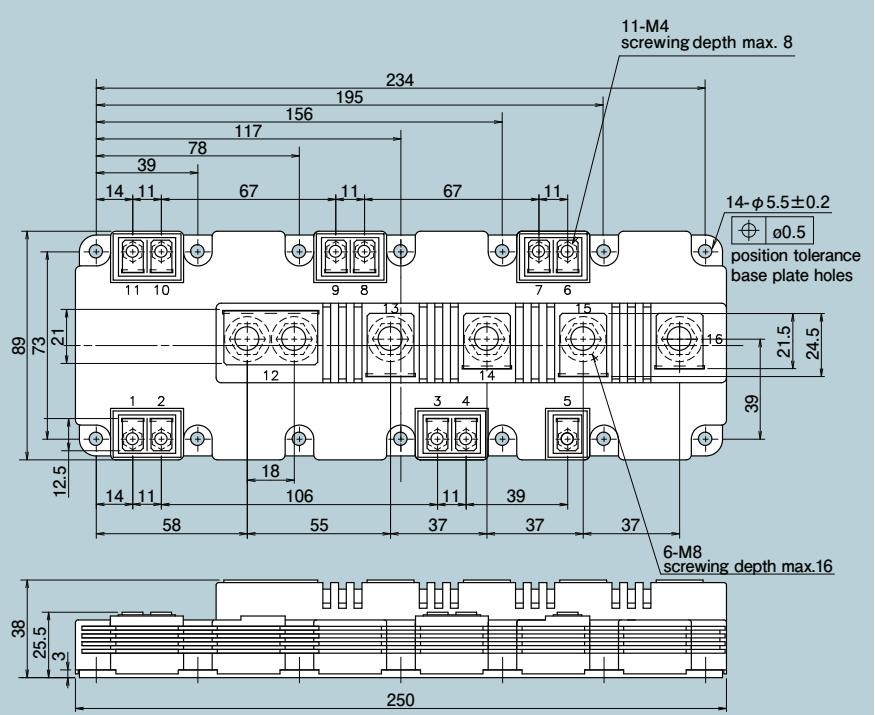


Outline

Unit: mm


M629

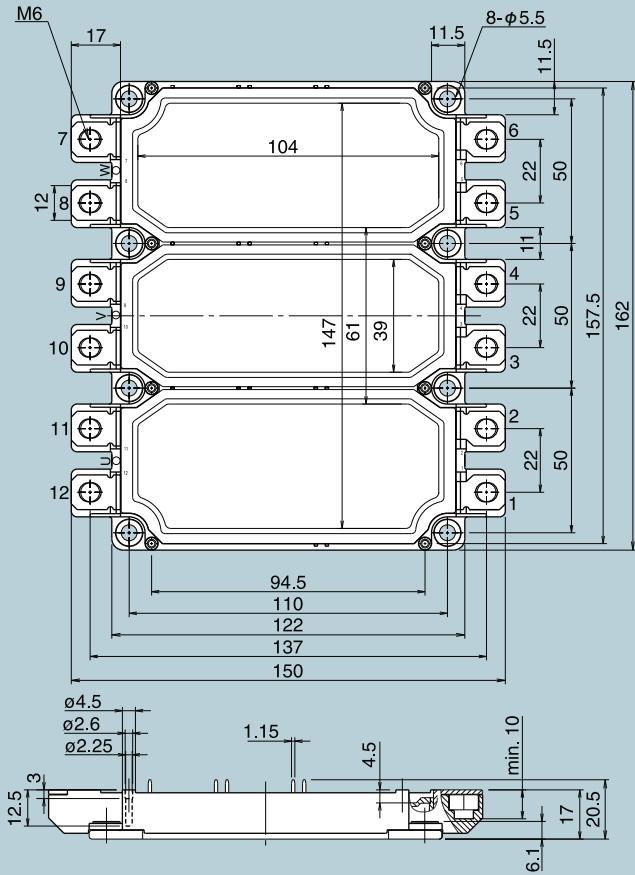


M633

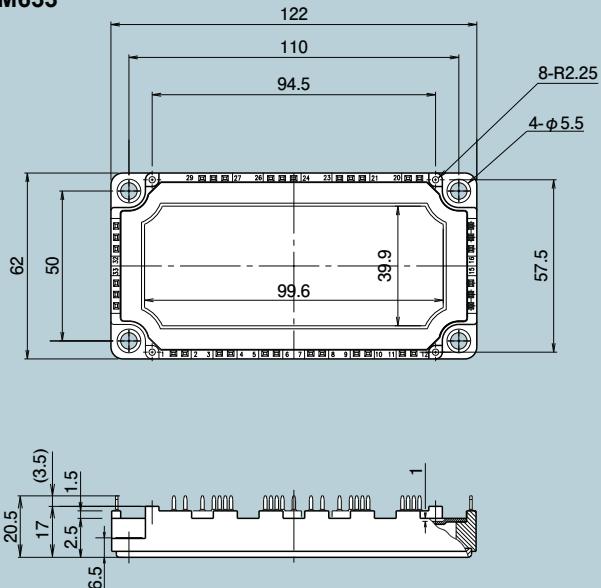

M636

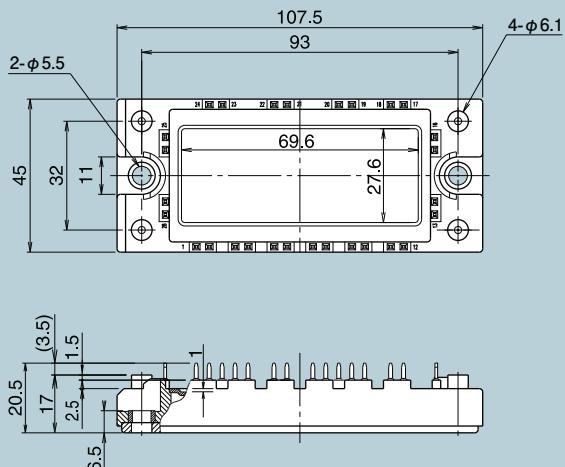


M647


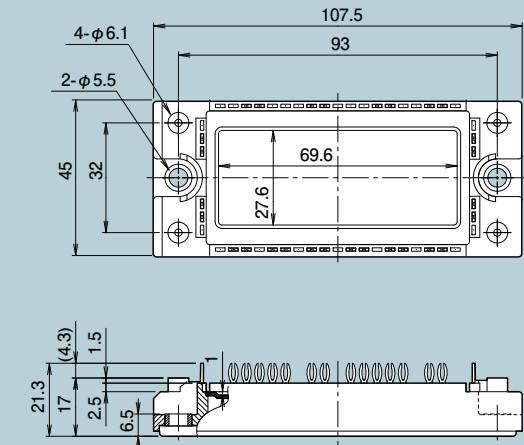


Unit: mm


M648

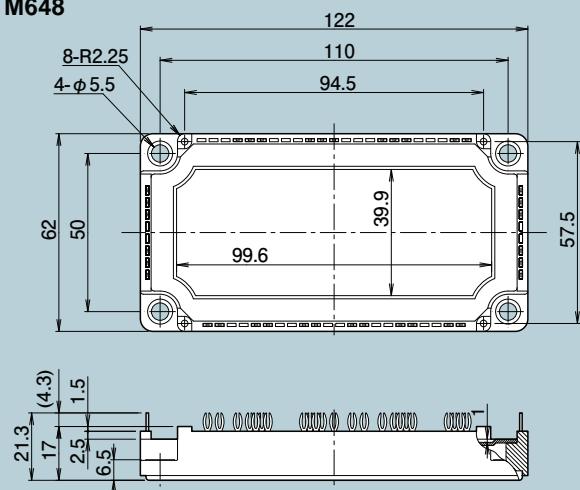


M653

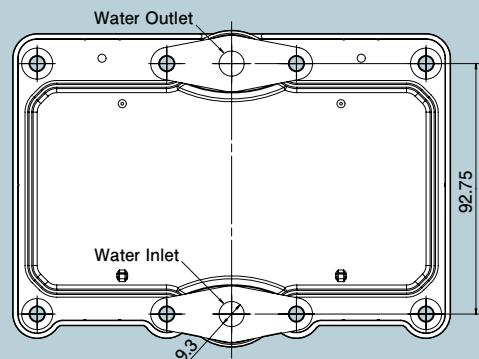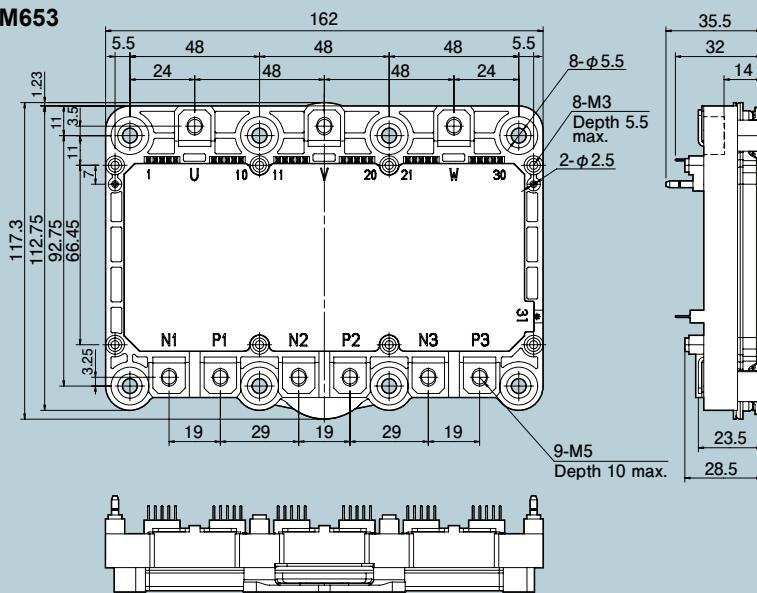

M668

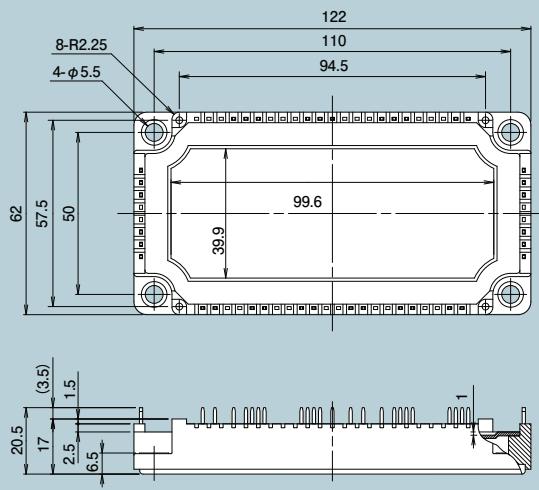



M669

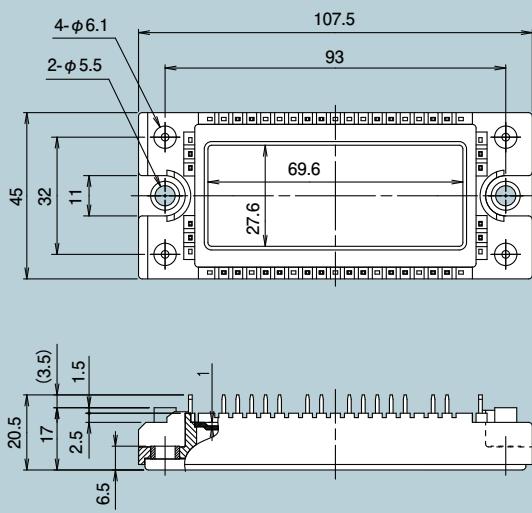



Outline

Unit: mm



M711

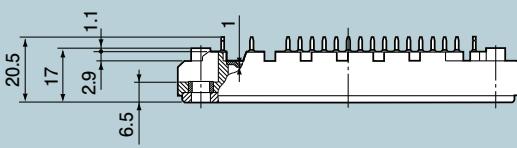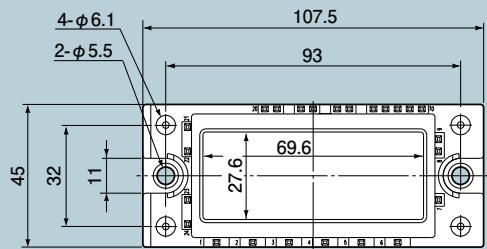



M712

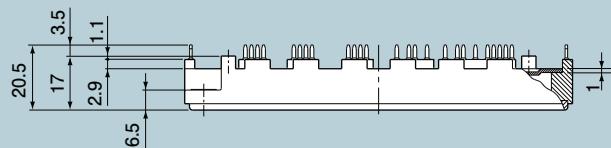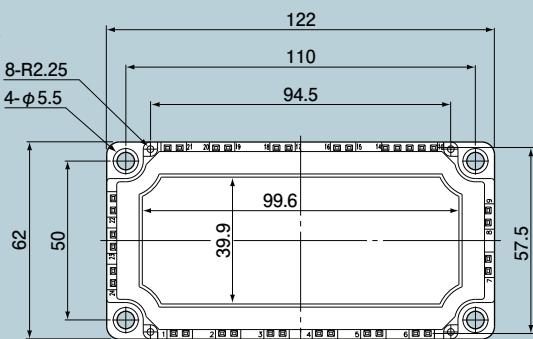



M719

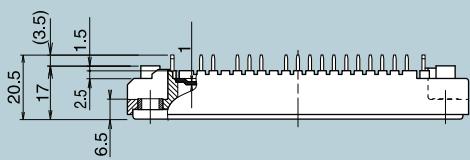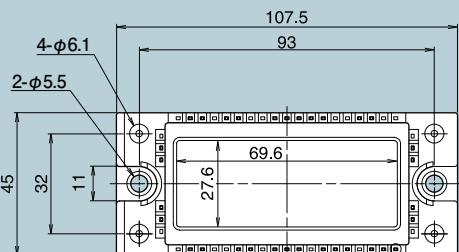



M720

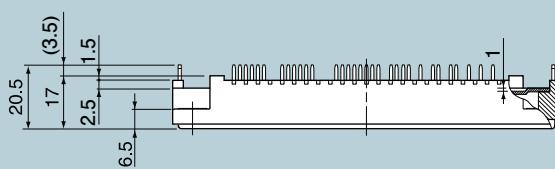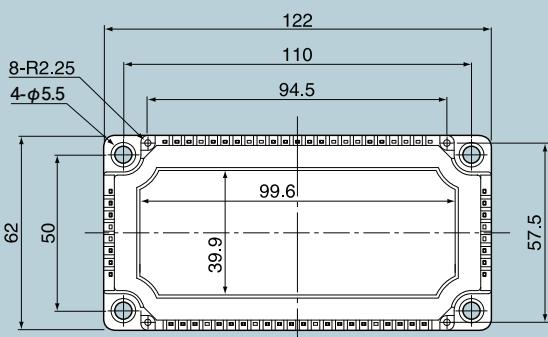

M721

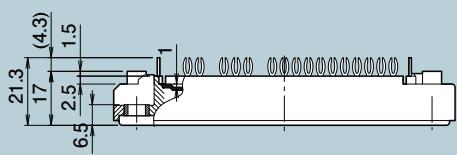
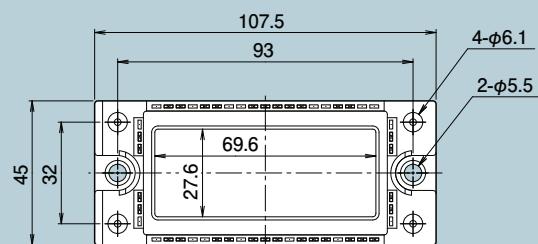


M722

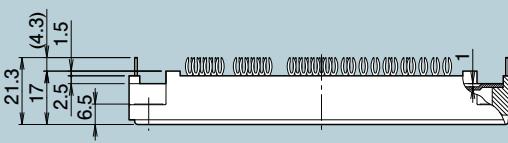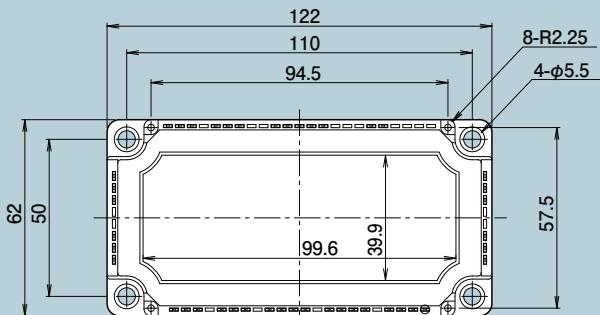


Unit: mm



M726

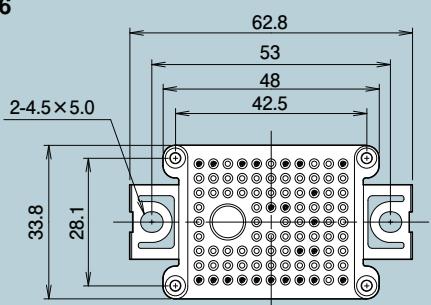


M727

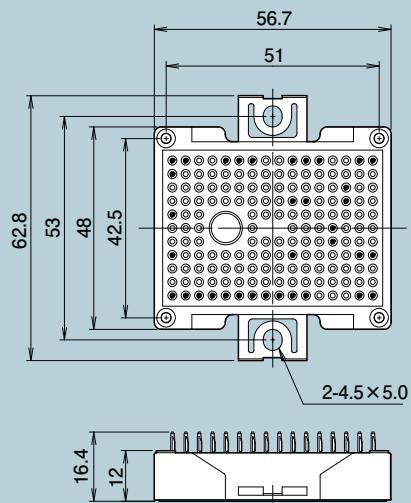



M728

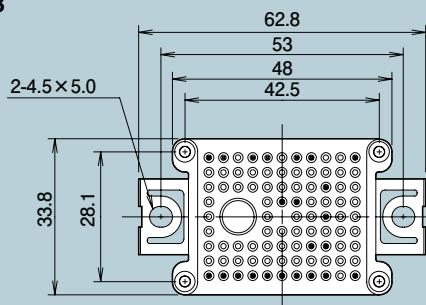



M729

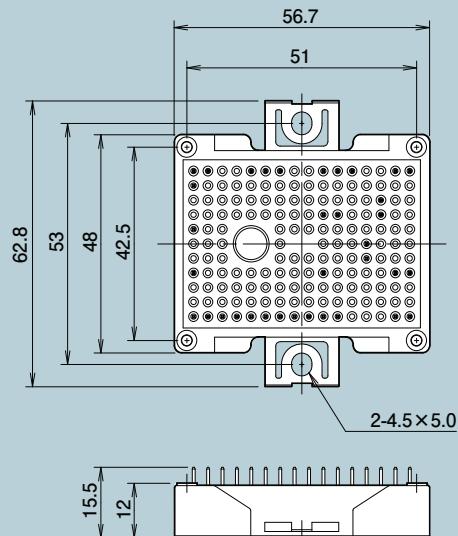

M730

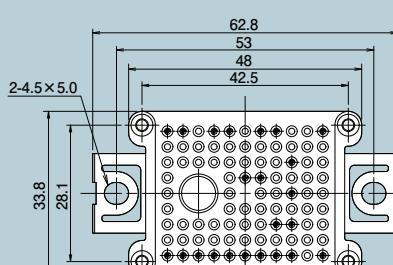


M731

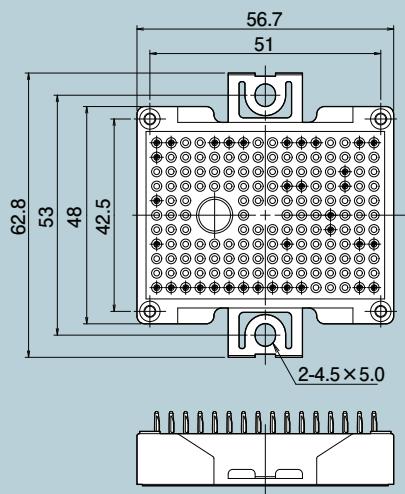


Outline

Unit: mm

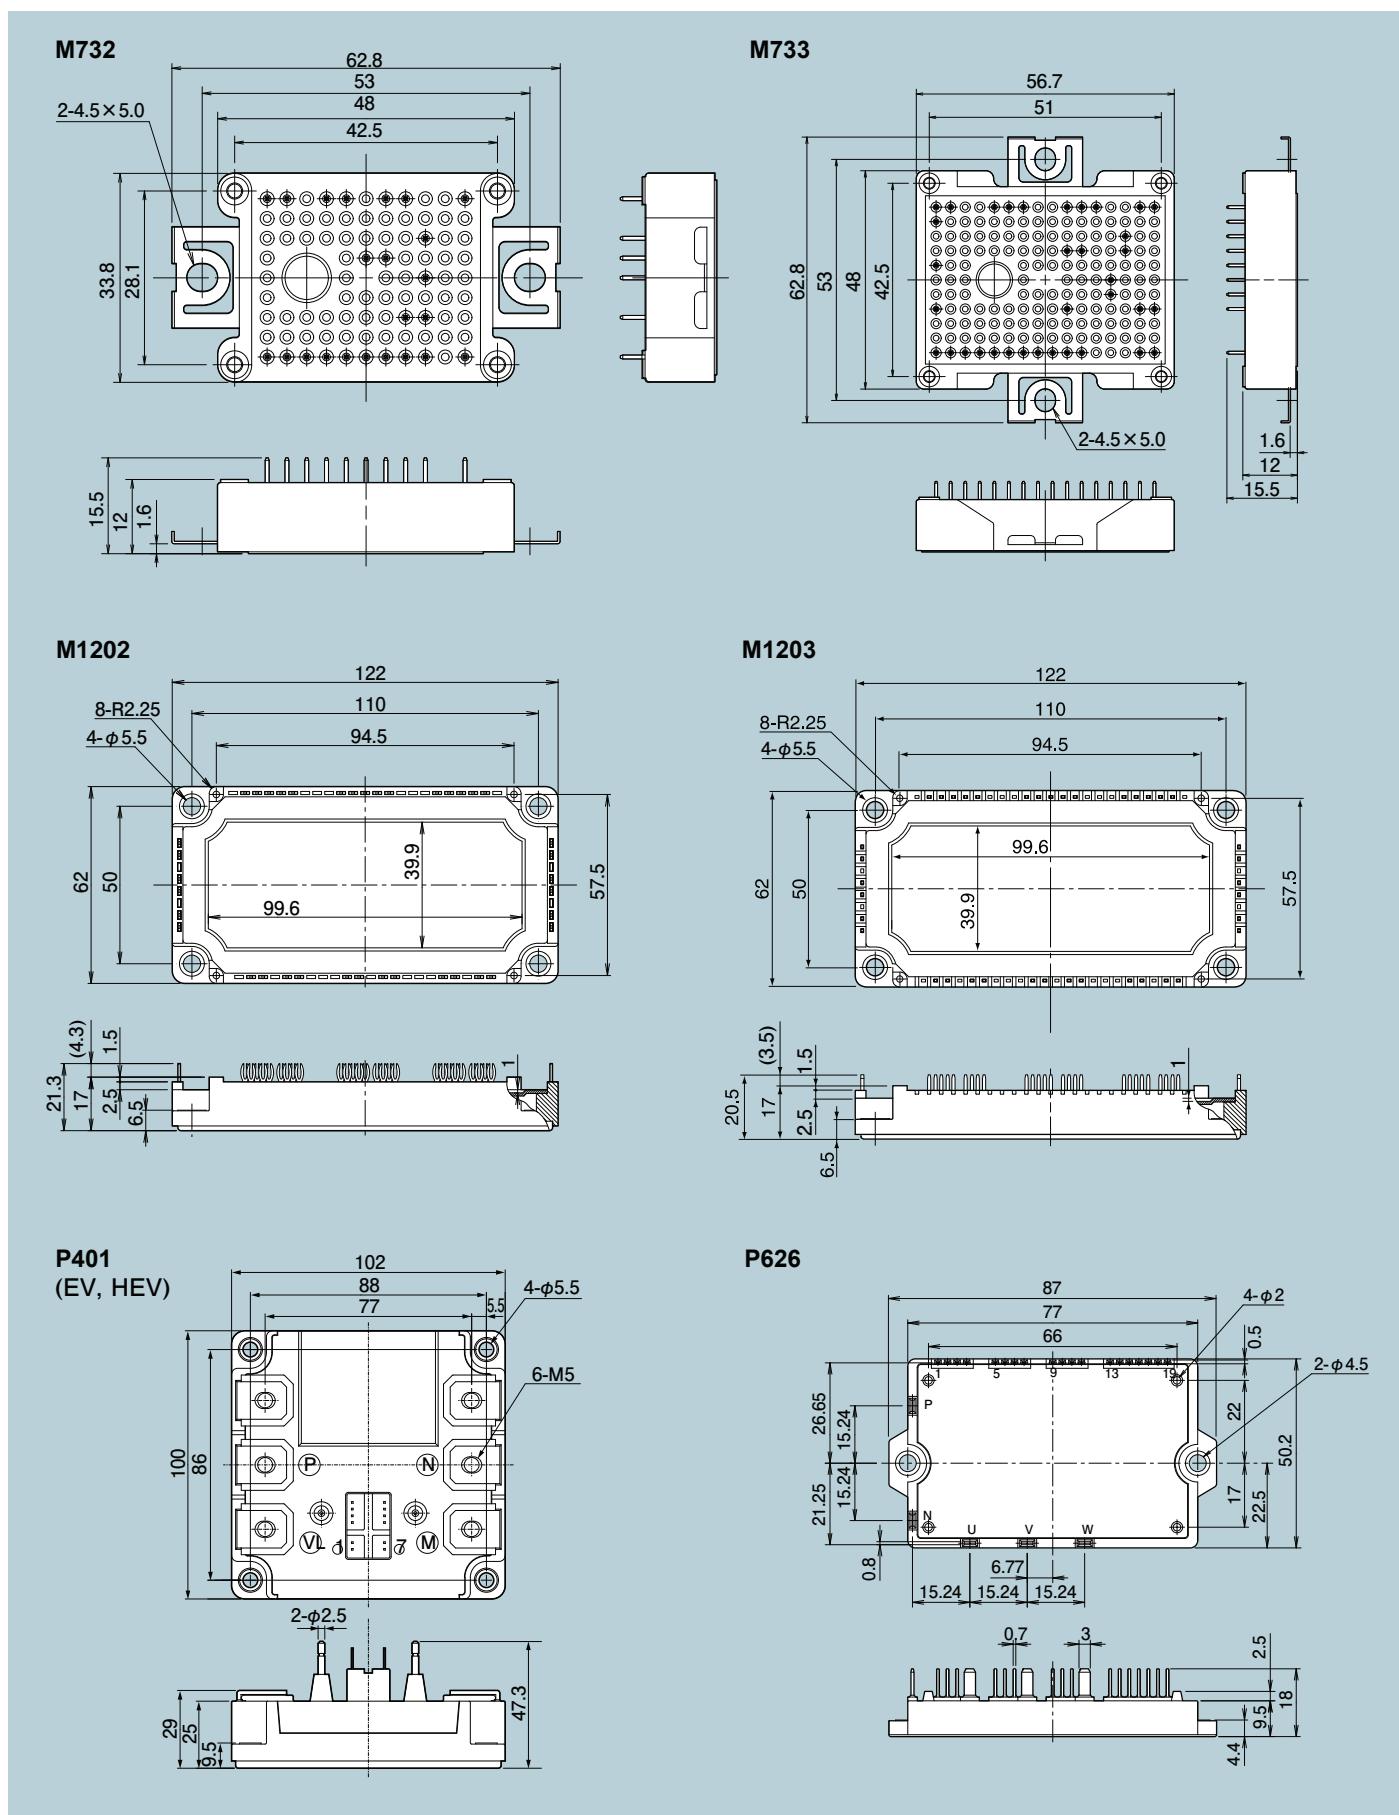


Unit: mm


P629

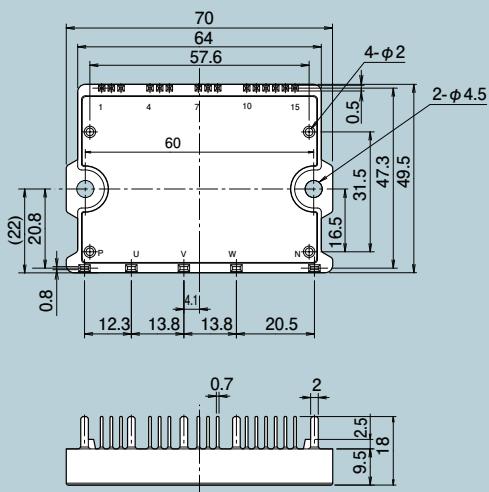


P630

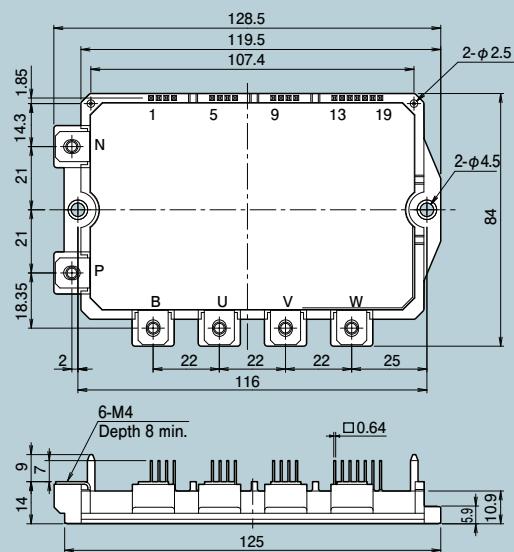

P631

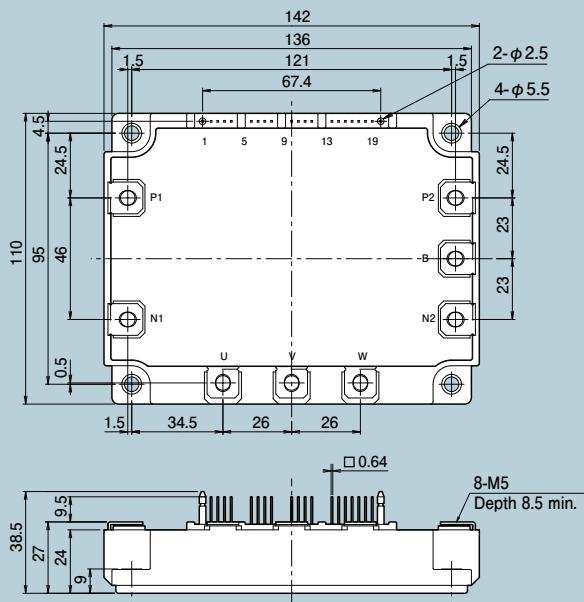


P636

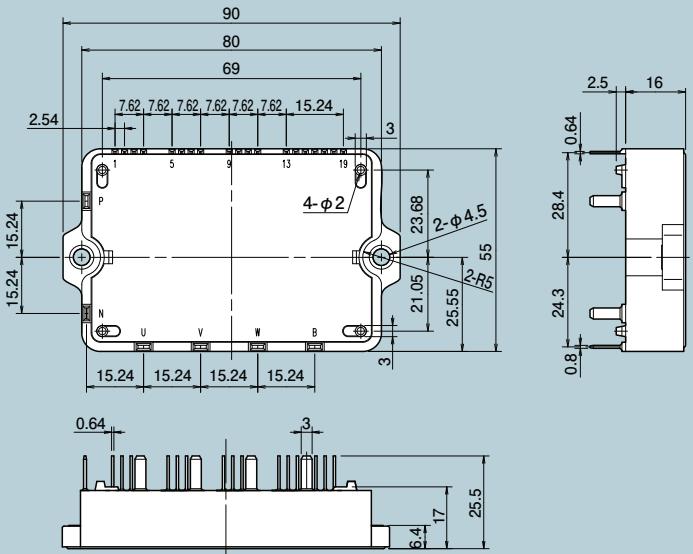

Outline

Unit: mm


P633A

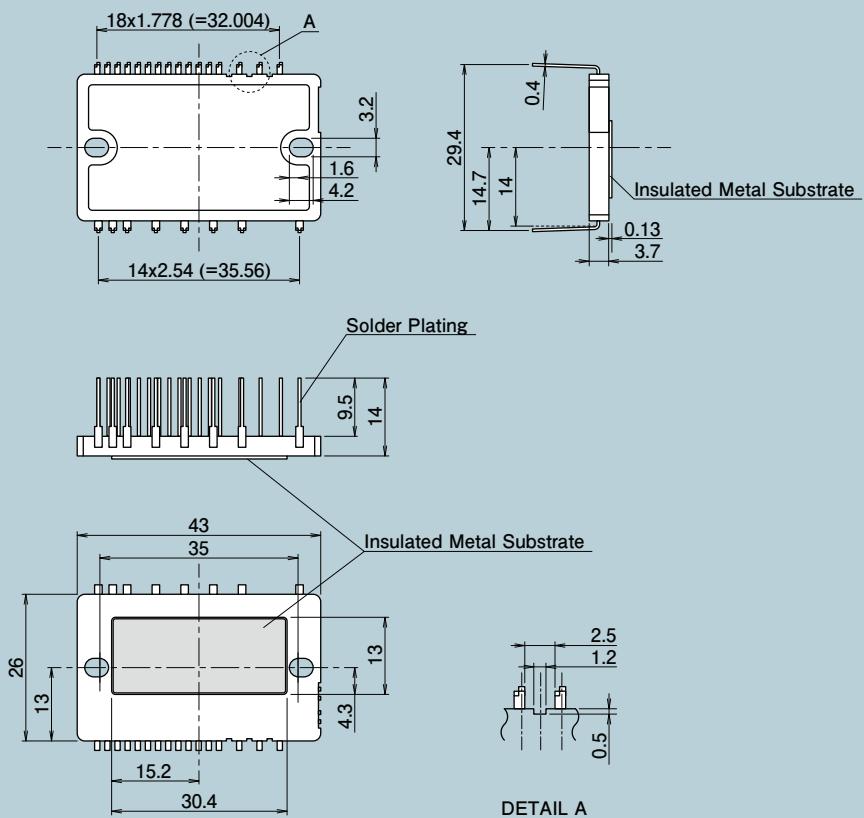


<Integrated circuits>

Unit: mm


SOP-8¹

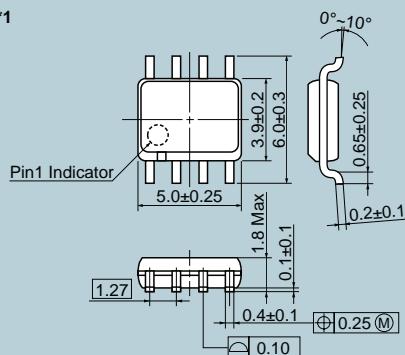


SOP-8E

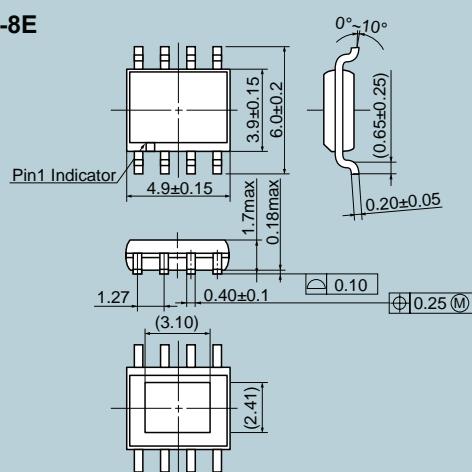


DIP-8

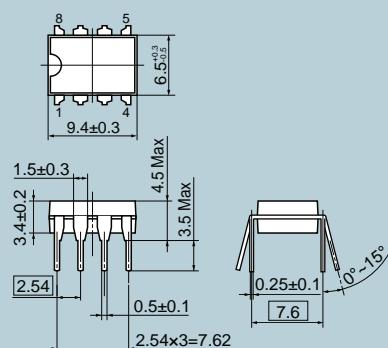


PSOP-12

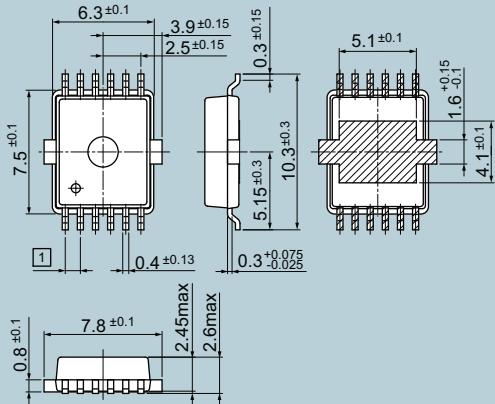


DIP-16

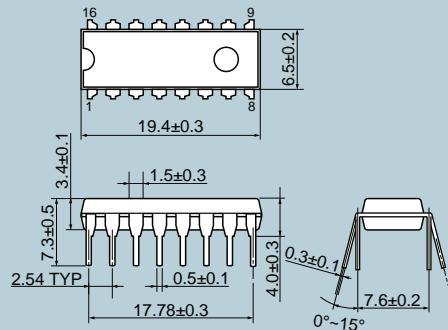


SOP-16(M)

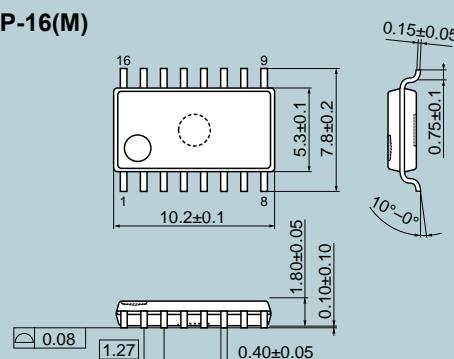

SOP-16(N)

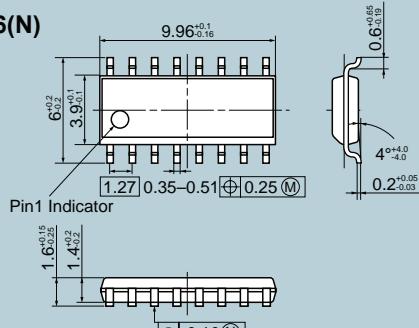

SSOP-20

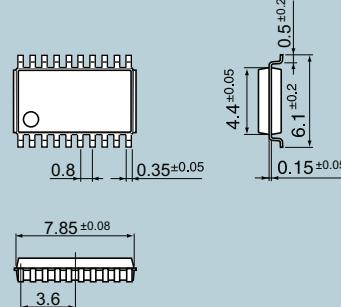


*1) This is the package size for the representative device type (FA8AxxN). For other ICs, please refer to the separate application note (specifications).


Outline

Unit: mm

TSSOP-8

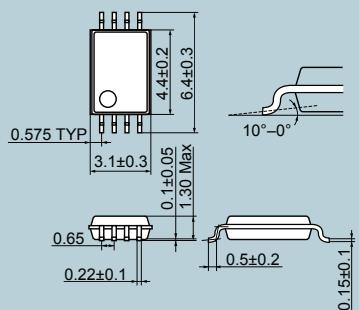


TSSOP-16

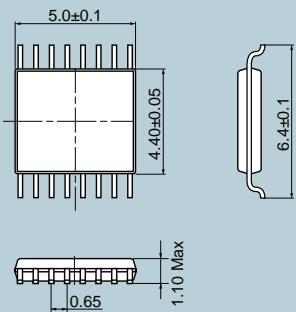


<Discrete devices>

Unit: mm


K-pack(S)

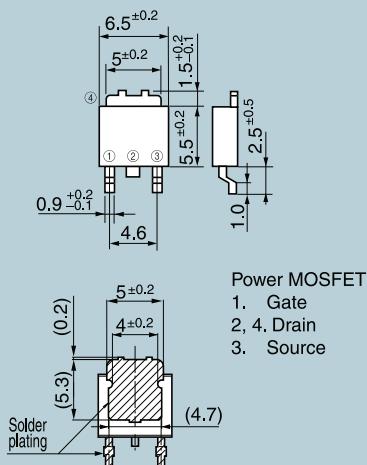


DFN8x8

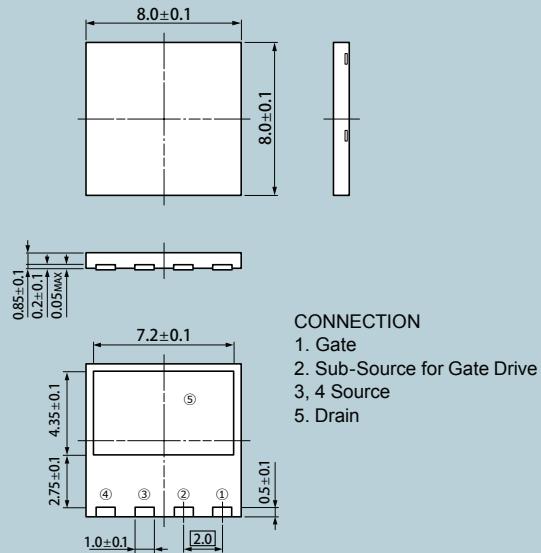


K-pack(L)/I-pack: Power MOSFET K-pack(P)/I-pack: Diode

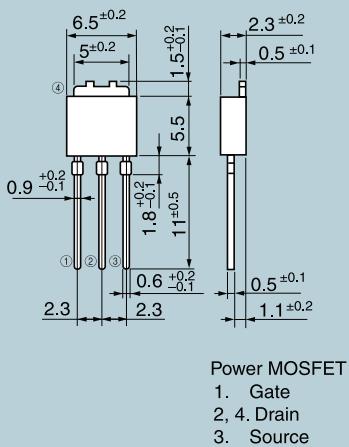


T-pack(S)

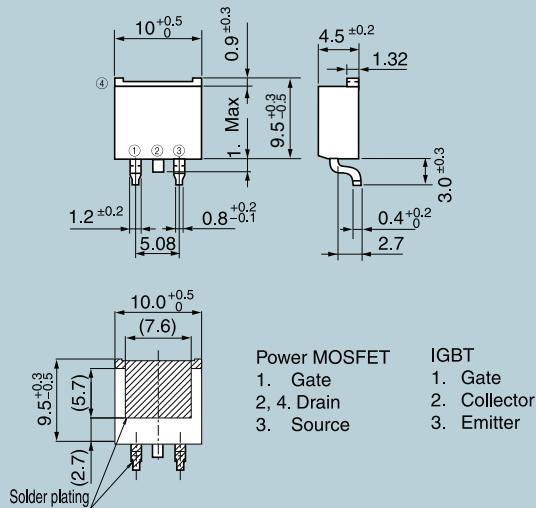

T-pack(L): Power MOSFET T-pack(P): Diode

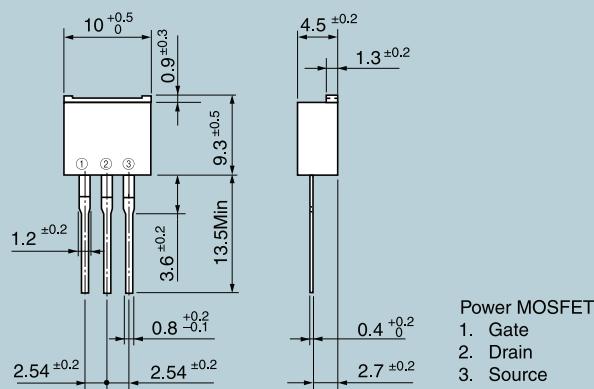

TFP

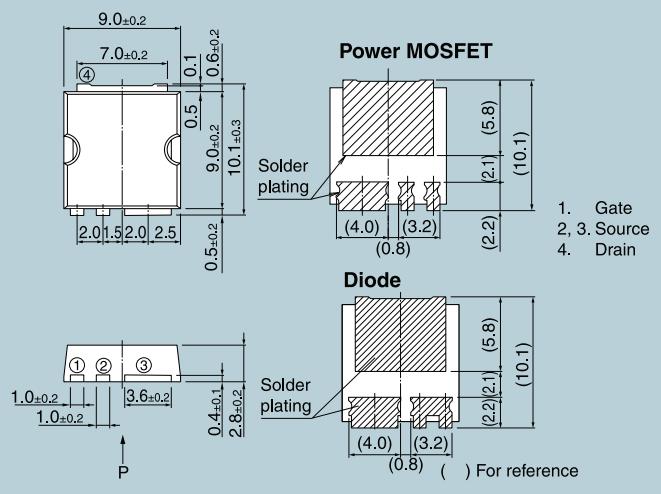


View from P


Outline

Unit: mm

D2-Pack

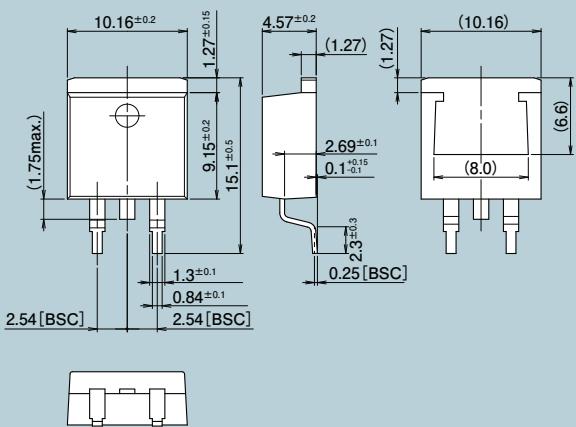

TO-220AB

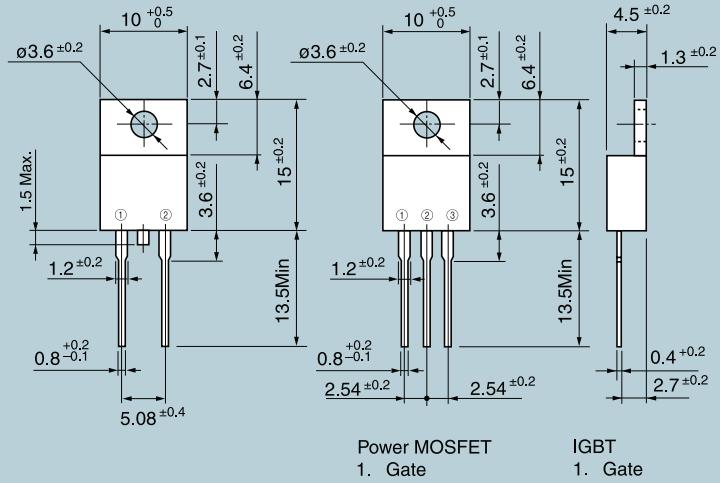


Power MOSFET

1. Gate
2. Drain
3. Source


IGBT

1. Gate
2. Collector
3. Emitter

TO-220-2

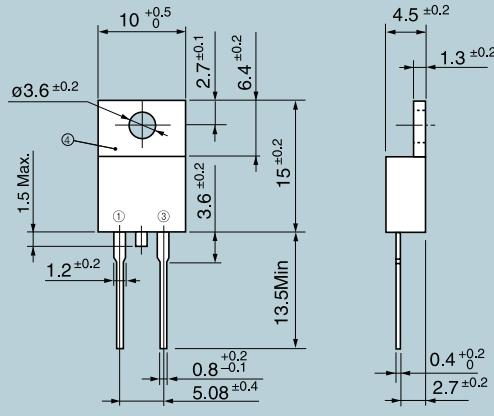


TO-220F

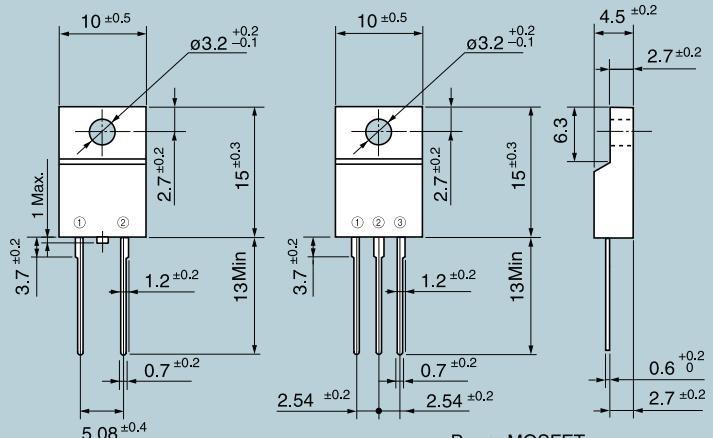


Power MOSFET

1. Gate
2. Drain
3. Source

TO-220F (SLS)

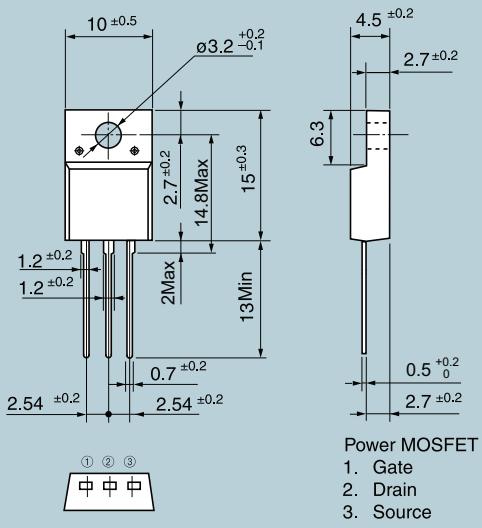


TO-220F-2

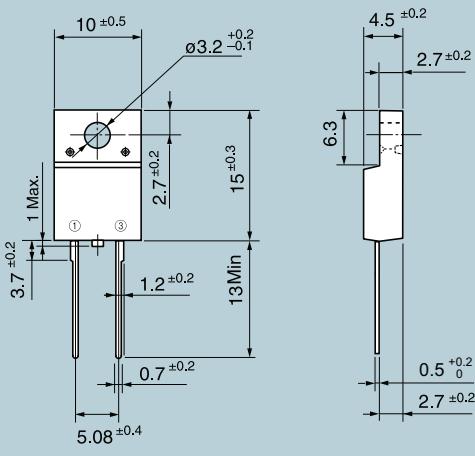

Unit: mm


TO-247

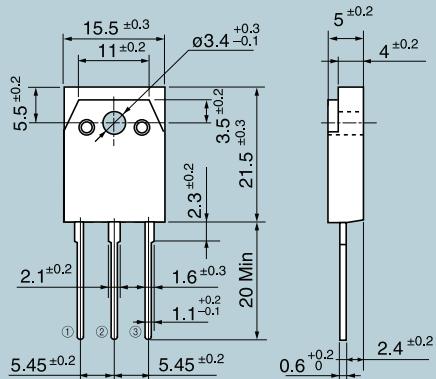

Power MOSFET

1. Gate
 2. Drain
 3. Source

TO-247-P2

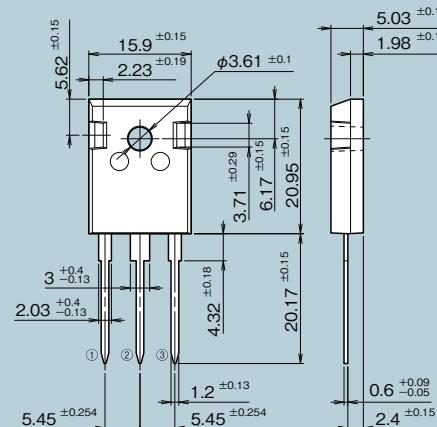

Power MOSFET

1. Gate
 2. Drain
 3. Source


IGBT

- 1. Gate
 - 2. Collector
 - 3. Emitter

FWD


1. Anode
 2. Cathode
 3. Anode

TO-247-2-P2

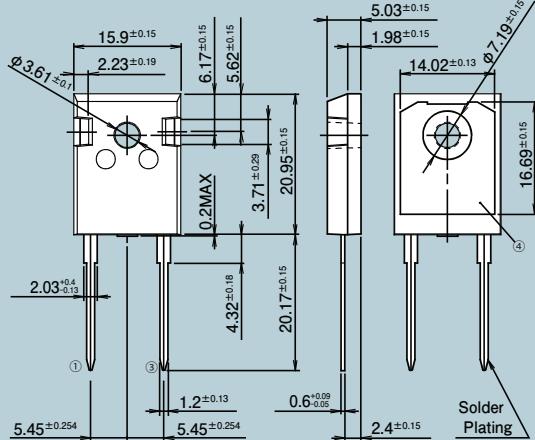

CONNECTION
①,④ CATHODE
③ ANODE


TO-247-2L-P2

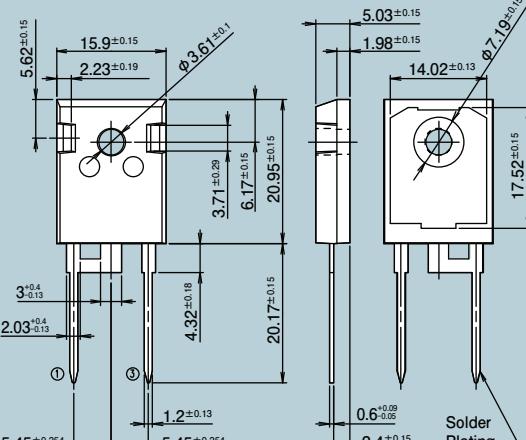


Rating

CONNECTION
① CATHODE

TO-247-4-P2

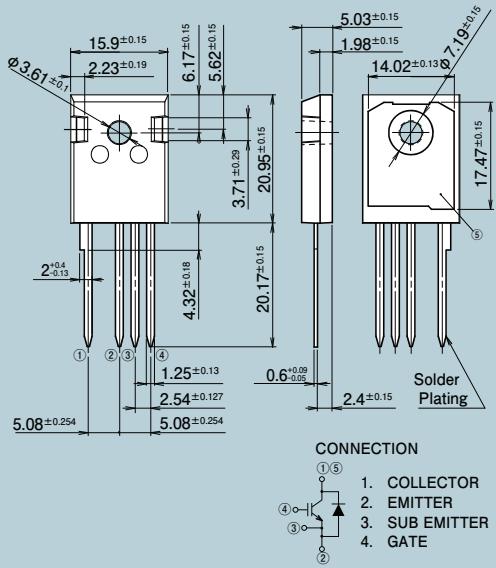

TO-3P

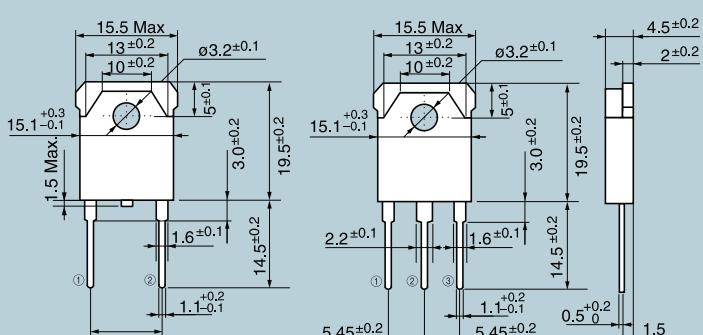

Power MOSFET

1. Gate
 2. Drain
 3. Source


IGBT

- 1. Gate
 - 2. Collector
 - 3. Emitter

Outline


Unit: mm

TO-3P(Q)

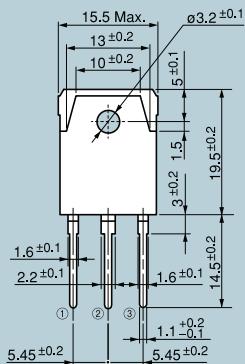

Power MOSFET
1. Gate
2. Drain
3. Source

TO-3PF

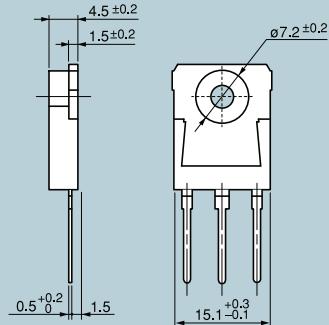

- Power MOSFET
- 1. Gate
- 2. Drain
- 3. Source

A vertical cylinder with a top section labeled 5.5 ± 0.3 , a middle section labeled $3.2 +0.3 -0.0$, and a bottom section labeled 3.5 ± 0.2 .

Order Quantity

- Order unit is the number in "Min. quantity per order" or its integral multiplication.
- This table covers single or reel package items (Except for taping items).
- Order unit of taping package is different for each specification.

Please contact us for more detail.

Products	Package	Type number	Min. quantity per order	Min. quantity per packing
Power MOSFETs Diodes	TO-220	All types	100	500
	TO-220F/TO-220F(SLS)		100	500
	TO-220F-2		1,000	1,000
	TO-247		100	500
	TO-247-2-P2		600	600
	TO-247-4-P2		600	600
	TO-247-2L-P2		600	600
	TO-3P, TO-3P(Q)		100	500
	TO-3PF		100	500
	TO-3PL		50	50
	TFP		1,500	1,500
	K-pack (S)		3,000	3,000
	T-pack (S)		1,000	1,000
Power MOSFETs Discrete IGBTs Diodes	K-pack (L, P)		500	500
	T-pack (L, P)		100	500
	DFN8x8		3,000	3,000
	TO-220	-S2□PP (Tube)	1,000	1,000
	TO-220F	-S3□PP (Tube)	1,000	1,000
	TO-247-P2	All types	600	600
ICs		All types (except for below types)	2,000	2,000
		FA8A-□□, FA6A-□□, FA1A-□□	3,000	3,000
		FA5627, 28	3,000	3,000
		FA5637	3,000	3,000
		FA5641, 42, 43, 44	3,000	3,000
		FA5680, FA5681	3,000	3,000
		FA5696	3,000	3,000
		FA5651	3,000	3,000
		FA5752	3,000	3,000
		FA5760	3,000	3,000

Type Number Index

Page	Page	Page	Page	Page	Page
12MBI100VN-120-50	41	1MBI400V-170-50	34	2MBI1400VXB-120P-54	32
12MBI100VX-120-50	41	1MBI400VF-120-50	34	2MBI1400VXB-120P-80	32
12MBI50VN-120-50	41	1MBI400VH-060L-50	36	2MBI1400VXB-170E-50	33
12MBI50VX-120-50	41	1MBI50U4F-120L-50	36	2MBI1400VXB-170E-54	33
12MBI75VN-120-50	41	1MBI600V-120-50	34	2MBI1400VXB-170E-80	33
12MBI75VX-120-50	41	1MBI600V-170-50	34	2MBI1400VXB-170P-50	33
1MBI1000UG-330	35	1MBI600VF-120-50	34	2MBI1400VXB-170P-54	33
1MBI1000UG-330B	35	1MBI650VXA-170EH-50	37	2MBI1400VXB-170P-80	33
1MBI1000VXB-170EH-50	37	1MBI650VXA-170EH-54	37	2MBI1400XXB120P-50	32
1MBI1000VXB-170EH-54	37	1MBI650VXA-170EH-80	37	2MBI1400XXB170-50	33
1MBI1000VXB-170EH-80	37	1MBI650VXA-170EL-50	37	2MBI150HH-120-50	39
1MBI1000VXB-170EL-50	37	1MBI650VXA-170EL-54	37	2MBI150HJ-120-50	39
1MBI1000VXB-170EL-54	37	1MBI650VXA-170EL-80	37	2MBI150VA-060-50	22
1MBI1000VXB-170EL-80	37	1MBI75U4F-120L-50	36	2MBI150VA-120-50	24
1MBI100U4F-120L-50	36	1MBI800UG-330	35	2MBI150VB-120-50	24
1MBI1200UE-330	35	1MBI900V-120-50	34	2MBI150VH-170-50	25
1MBI1200VC-120P	35	1MBI900VXA-120PC-50	38	2MBI150VH-170-80	25
1MBI1200VC-170E	35	1MBI900VXA-120PC-54	38	2MBI150XAA065-50	22
1MBI1200VR-170E	35	1MBI900VXA-120PC-80	38	2MBI150XAA120-50	23
1MBI1400VXB-120PH-54	37	1MBI900VXA-120PD-50	38	2MBI150XAA170-50	25
1MBI1400VXB-120PH-80	37	1MBI900VXA-120PD-54	38	2MBI150XHA170-50	25
1MBI1400VXB-120PL-54	37	1MBI900VXA-120PD-80	38	2MBI1800XXF120P-50	32
1MBI1400VXB-120PL-80	37	1MSI1200XAGF330-03	53	2MBI1800XXF170-50	33
1MBI1400VXB-170PH-50	37	1MSI1800XAEF330-03	53	2MBI200HH-120-50	39
1MBI1400VXB-170PH-54	37	2MBI1000VXB-170E-50	33	2MBI200HJ-120-50	39
1MBI1400VXB-170PL-50	37	2MBI1000VXB-170E-54	33	2MBI200VA-060-50	22
1MBI1400VXB-170PL-54	37	2MBI1000VXB-170E-80	33	2MBI200VB-120-50	24
1MBI1500UE-330	35	2MBI1000VXB-170EA-50	33	2MBI200VH-120-50	24
1MBI1500UE-330B	35	2MBI1000VXB-170EA-54	33	2MBI200VH-120-80	24
1MBI150VA-120L-50	36	2MBI1000VXB-170EA-80	33	2MBI200VH-170-50	25
1MBI1600VC-120P	35	2MBI1000XUF170-50	30	2MBI200VH-170-80	25
1MBI1600VC-170E	35	2MBI1000XVF170-50	30	2MBI200XAA065-50	22
1MBI1600VR-170E	35	2MBI1000XXB170-50	33	2MBI200XAA120-50	23
1MBI200HH-120L-50	39	2MBI100HB-120-50	39	2MBI200XBE120-50	23
1MBI200U4H-120L-50	36	2MBI100HJ-120-50	39	2MBI200XHA170-50	25
1MBI200VA-120L-50	36	2MBI100VA-060-50	22	2MBI225VJ-120-50	27
1MBI2400VC-120P	35	2MBI100VA-120-50	24	2MBI225VJ-120-80	27
1MBI2400VC-170E	35	2MBI100VA-170-50	25	2MBI225VN-120-50	27
1MBI2400VD-120P	35	2MBI100XAA120-50	23	2MBI225VN-120-80	27
1MBI2400VD-170E	35	2MBI100XAA170-50	25	2MBI225VN-120S-50	27
1MBI2400VR-170E	35	2MBI1200VG-120P	31	2MBI225VX-120-50	27
1MBI2400VS-170E	35	2MBI1200VG-170E	31	2MBI225VX-120-80	27
1MBI300HH-120L-50	39	2MBI1200VT-170E	31	2MBI225VX-170-50	29
1MBI300U2H-060L-50	36	2MBI1200XXE120E-50	32	2MBI225VX-170-80	29
1MBI300V-170-50	34	2MBI1200XXE120P-50	32	2MBI225XNA120-50	26
1MBI3600VD-120P	35	2MBI1200XXE170-50	33	2MBI225XNA170-50	28
1MBI3600VD-170E	35	2MBI1400VXB-120E-50	32	2MBI225XNB120-50	26
1MBI3600VS-170E	35	2MBI1400VXB-120E-54	32	2MBI225XNB170-50	28
1MBI400HH-120L-50	39	2MBI1400VXB-120E-80	32	2MBI300HJ-120-50	39
1MBI400V-120-50	34	2MBI1400VXB-120P-50	32	2MBI300VB-060-50	22

Type Number Index

Page	Page	Page	Page	Page	Page	Page
2SK3474-01	86	2SK3650-01L, S	86	2SK3931-01	87	6MBI100XAE120-50
2SK3501-01	88	2SK3651-01R	86	2SK3932-01MR	87	6MBI100XBA120-50
2SK3502-01MR	88	2SK3676-01L, S	88	2SK3933-01L, S	87	6MBI100XXA120-50
2SK3504-01	87	2SK3680-01	87	2SK3981-01	88	6MBI150U4B-170-50
2SK3505-01MR	87	2SK3681-01	88	2SK3982-01MR	88	6MBI150VB-060-50
2SK3512-01L, S	87	2SK3682-01	87	2SK3983-01L, S	88	6MBI150VB-120-50
2SK3513-01L, S	88	2SK3683-01MR	87	2SK3985-01	87	6MBI150VX-060-50
2SK3514-01	87	2SK3684-01L, S	87	2SK3986-01MR	87	6MBI150VX-060-80
2SK3515-01MR	87	2SK3685-01	87	2SK3987-01L, S	87	6MBI150VX-120-50
2SK3516-01L, S	87	2SK3686-01	88	2SK3988-01	88	6MBI150VX-120-80
2SK3519-01	87	2SK3687-01MR	88	2SK3989-01MR	88	6MBI150XBA120-50
2SK3520-01MR	87	2SK3688-01L, S	88	2SK3990-01L, S	88	6MBI150XXA120-50
2SK3521-01L, S	87	2SK3689-01	88	2SK4004-01MR	87	6MBI180VB-120-50
2SK3522-01	87	2SK3692-01	87	2SK4040-01	87	6MBI180VB-120-55
2SK3523-01R	87	2SK3693-01MR	87	2SK4047-01S	90	6MBI180VX-120-50
2SK3524-01	88	2SK3694-01L, S	87	2SK4047-01S	94	6MBI180VX-120-55
2SK3525-01MR	88	2SK3695-01	89	2SK4068-01	90	6MBI180VX-120-80
2SK3526-01L, S	88	2SK3696-01MR	89	2SK4068-01	94	6MBI180VX-120-85
2SK3527-01	88	2SK3697-01	89	4MBI220VF-170R2-50	40	6MBI200XBA120-50
2SK3528-01R	88	2SK3698-01	88	4MBI220VF-170R2-60	40	6MBI200XBE120-50
2SK3535-01	86	2SK3699-01MR	88	4MBI300VG-120R-50	40	6MBI200XXA120-50
2SK3537-01MR	86	2SK3725-01	87	4MBI300VG-120R1-50	40	6MBI200XXE120-50
2SK3554-01	86	2SK3726-01MR	87	4MBI340VF-120R-50	40	6MBI225V-120-50
2SK3555-01MR	86	2SK3727-01	88	4MBI400VF-120R-50	40	6MBI300V-120-50
2SK3556-01L, S	86	2SK3728-01MR	88	4MBI400VG-060R-50	40	6MBI300V-120-80
2SK3580-01MR	87	2SK3730-01MR	90	4MBI450VB-120R1-50	40	6MBI300V-170-50
2SK3581-01L, S	87	2SK3730-01MR	94	4MBI450VB-120R1-60	40	6MBI450V-120-50
2SK3590-01	86	2SK3753-01R	88	4MBI450VB-170R2-50	40	6MBI450V-170-50
2SK3591-01MR	86	2SK3772-01	87	4MBI450VB-170R2-60	40	6MBI450V-170-80
2SK3592-01L, S	86	2SK3773-01MR	87	4MBI450VF-120RD-50	40	6MBI50VA-060-50
2SK3593-01	86	2SK3774-01L, S	87	4MBI600VB-170R2-50	40	6MBI50VA-120-50
2SK3594-01	86	2SK3775-01	87	4MBI600VB-170R2-60	40	6MBI50VW-060-50
2SK3595-01MR	86	2SK3778-01	86	4MBI600VC-120-50	40	6MBI50VW-120-50
2SK3596-01L, S	86	2SK3779-01R	86	4MBI600VC-120-60	40	6MBI550V-120-50
2SK3597-01	86	2SK3804-01S	90	4MBI650VB-120R1-50	40	6MBI75VA-060-50
2SK3598-01	86	2SK3804-01S	94	4MBI650VB-120R1-60	40	6MBI75VA-120-50
2SK3599-01MR	86	2SK3882-01	86	4MBI900VB-120R1-50	40	6MBI75VW-060-50
2SK3600-01L, S	86	2SK3886-01MR	86	4MBI900VB-120R1-60	40	6MBI75VW-120-50
2SK3602-01	86	2SK3887-01	88	4MBI900VB-120RA-50	40	6MBI800XV-075V-01
2SK3603-01MR	86	2SK3888-01MR	88	4MBI900VB-120RA-60	40	6MBP100VDA060-50
2SK3604-01L, S	86	2SK3889-01L, S	88	6MBI100U4B-170-50	20	6MBP100VDA120-50
2SK3606-01	86	2SK3891-01R	88	6MBI100VA-060-50	18	6MBP100VDN060-50
2SK3607-01MR	86	2SK3916-01	87	6MBI100VA-120-50	19	6MBP100VDN120-50
2SK3608-01L, S	86	2SK3917-01MR	87	6MBI100VB-120-50	19	6MBP100VEA120-50
2SK3609-01	86	2SK3920-01	86	6MBI100VV-060-50	18	6MBP100VFN060-50
2SK3610-01	86	2SK3921-01L, S	86	6MBI100VW-120-50	19	6MBP10VAA120-50
2SK3611-01MR	86	2SK3922-01	86	6MBI100VX-120-50	19	6MBP150VDA060-50
2SK3612-01L, S	86	2SK3928-01	89	6MBI100VX-120-80	19	6MBP150VDN060-50
2SK3648-01	86	2SK3929-01MR	89	6MBI100VX-170-50	20	6MBP150VEA120-50
2SK3649-01MR	86	2SK3930-01L, S	89	6MBI100VX-170-80	20	6MBP15VAA120-50
					43	7MBP200VEA120-50
					45	7MBP200VR060-50
					45	7MBR100VR120-50

Type Number Index

Page	Page	Page	Page	Page	Page	Page					
7MBR150VX120-50	17	7MBR35VKB120-50	12	7MBR75VX120-80	17	F5074H	95	FA5696N	65	FDCP10S65A	56
7MBR150VX120-80	17	7MBR35VKD120-50	12	7MBR75VY060-50	15	F5106H	95	FA5752N	68	FDCP20C65	55
7MBR150VZ060-50	15	7MBR35VM120-50	14	7MBR75VY060-80	15	F5112H	95	FA5760N	67	FDCP20C65A	56
7MBR150VZ060-80	15	7MBR35VP120-50	14	7MBR75VZ120-50	17	FA13842P/N	61	FA6A00N	67	FDCP25S65	55
7MBR150VZ120-50	17	7MBR35VW120-50	17	7MBR75VZ120-80	17	FA13843P/N	61	FA6A10N	67	FDCP25S65A	56
7MBR150VZ120-80	17	7MBR35VW120-80	17	7MBR75XMA065-50	13	FA13844P/N	61	FA6A11N	67	FDCW18T120	55
7MBR150XNA065-50	13	7MBR35VY120-50	17	7MBR75XME120-50	14	FA13845P/N	61	FA6A19N	67	FDCY10S65	55
7MBR150XNE120-50	14	7MBR35VY120-80	17	7MBR75XNA065-50	13	FA1A00N	65	FA6A30N	67	FDCY10S65A	56
7MBR150XRA065-50	13	7MBR35XKB120-50	12	7MBR75XNA120-50	14	FA1A01N	65	FA6A31N	67	FDCY18S120	55
7MBR150XRE065-50	13	7MBR35XKD120-50	12	7MBR75XPA065-50	13	FA1A10N	65	FA6B20N	67	FDCY18S120A	56
7MBR150XRE120-50	14	7MBR35XMA120-50	14	7MBR75XPE120-50	14	FA1A11N	65	FA7700V	69	FDCY20C65	55
7MBR150XXA065-50	15	7MBR35XPA120-50	14	7MBR75XRA120-50	14	FA1A21N	65	FA7701V	69	FDCY20C65A	56
7MBR150XXE120-50	16	7MBR35XWA120-50	16	7MBR75XRE120-50	14	FA1A50N	65	FA7703V	69	FDCY25S65	55
7MBR150XZA065-50	15	7MBR35XYA120-50	16	7MBR75XWA065-50	15	FA1A60N	65	FA7764N/P	69	FDCY25S65A	56
7MBR150XZE120-50	16	7MBR50VA060-50	13	7MBR75XWE120-50	16	FA3641P/N	61	FA8A00N	59	FDCY36C120	55
7MBR15VKA060-50	11	7MBR50VB120-50	14	7MBR75XXA065-50	15	FA3647P/N	61	FA8A01N	59	FDCY36C120A	56
7MBR15VKA120-50	12	7MBR50VKB060-50	11	7MBR75XXA120-50	16	FA3687V	69	FA8A12N	59	FDCY50C65	55
7MBR15VKB120-50	12	7MBR50VKD060-50	11	7MBR75XYA065-50	15	FA5502P/M	65	FA8A27N	59	FDCY50C65A	56
7MBR15VKC060-50	11	7MBR50VM120-50	14	7MBR75XYE120-50	16	FA5504P/N	61	FA8A37N	59	FDRP15S60L	109
7MBR15VKC120-50	12	7MBR50VN120-50	14	7MBR75XZA120-50	16	FA5510P/N	61	FA8A39N	59	FDRP25S60L	109
7MBR15VKD120-50	12	7MBR50VP060-50	13	7MSR100VAB060-50	51	FA5511P/N	61	FA8A40N	59	FDRW12S120J	110
7MBR15XKA065-50	11	7MBR50VP120-50	14	7MSR35VAB120-50	51	FA5514P/N	61	FA8A41N	59	FDRW15S60L	109
7MBR15XKA120-50	12	7MBR50VR120-50	14	7MSR50VAB060-50	51	FA5515P/N	61	FA8A60N	59	FDRW20S120J	110
7MBR15XKB120-50	12	7MBR50VW120-50	17	7MSR50VAB120-50	51	FA5570N	63	FA8A61N	59	FDRW25S60L	109
7MBR15XKC065-50	11	7MBR50VW120-80	17	7MSR75VAB060-50	51	FA5571N	63	FA8A64N	59	FDRW30S120J	110
7MBR15XKC120-50	12	7MBR50VX120-50	17	EPL4PC-R3S	111	FA5572N	63	FA8A65N	59	FDRW35S60L	109
7MBR15XKD120-50	12	7MBR50VX120-80	17	EPL6GC-R3S	111	FA5573N	63	FA8A70N	59	FDRW40C120J	110
7MBR20VKA060-50	11	7MBR50VY060-50	15	ESAD83-004R	108	FA5574N	63	FA8A71N	59	FDRW50C60L	109
7MBR20VKC060-50	11	7MBR50VY060-80	15	ESAD83-006R	108	FA5577N	63	FA8A74N	59	FDRW60C120J	110
7MBR20XKA065-50	11	7MBR50VY120-50	17	ESAD83M-004RR	108	FA5590N	65	FA8A75N	59	FDRW60T65L	109
7MBR20XKC065-50	11	7MBR50VY120-80	17	ESAD83M-006RR	108	FA5591N	65	FA8A80N	59	FDRW70C60L	109
7MBR25VA120-50	14	7MBR50VZ120-50	17	ESAD92-02R	108	FA5601N	65	FA8A81N	59	FDRW75T60L	109
7MBR25VKB120-50	12	7MBR50VZ120-80	17	ESAD92-03R	108	FA5604N	61	FA8A84N	59	FGW15N120H	48
7MBR25VKD120-50	12	7MBR50XKB065-50	11	ESAD92M-02RR	108	FA5605N	61	FA8A85N	59	FGW15N120HD	48
7MBR25VM120-50	14	7MBR50XKD065-50	11	ESAD92M-03RR	108	FA5606N	61	FA8A90N	59	FGW15N120VD	48
7MBR25VP120-50	14	7MBR50XMA065-50	13	ESAЕ92-03R	108	FA5607N	61	FA8A91N	59	FGW25N120VD	48
7MBR25VW120-50	17	7MBR50XMA120-50	14	ESAF92-03R	108	FA5612N	65	FA8A94N	59	FGW25N120W	47
7MBR25VW120-80	17	7MBR50XPA065-50	13	F5018	95	FA5613N	65	FA8A95N	59	FGW25N120WD	47
7MBR25VY120-50	17	7MBR50XPA120-50	14	F5019	95	FA5614N	65	FA8B16N	59	FGW25N120WE	47
7MBR25VY120-80	17	7MBR50XPE120-50	14	F5020	95	FA5615N	65	FDCA10S65	55	FGW30N120H	48
7MBR25XKA120-50	12	7MBR50XWA065-50	15	F5033	95	FA5640N	63	FDCA18S120	55	FGW30N120HD	48
7MBR25XKB120-50	12	7MBR50XWA120-50	16	F5041	95	FA5641N	63	FDCA20C65	55	FGW30N60VD	48
7MBR25XKC120-50	12	7MBR50XYA065-50	15	F5042	95	FA5642N	63	FDCA25S65	55	FGW30N65W	47
7MBR25XKD120-50	12	7MBR50XYA120-50	16	F5043	95	FA5643N	63	FDCC10S65	55	FGW30XS65	47
7MBR30VKA060-50	11	7MBR75VB060-50	13	F5044H	95	FA5644N	63	FDCC10S65A	56	FGW30XS65C	47
7MBR30VKC060-50	11	7MBR75VB120-50	14	F5045P	95	FA5648N	63	FDCC20C65	55	FGW35N60H	48
7MBR30XKA065-50	11	7MBR75VN120-50	14	F5048	95	FA5650N	68	FDCC20C65A	56	FGW35N60HC	48
7MBR30XKC065-50	11	7MBR75VP060-50	13	F5055	95	FA5651N	68	FDCC25S65	55	FGW35N60HD	48
7MBR35VA120-50	14	7MBR75VR120-50	14	F5062H	95	FA5680N	59	FDCC25S65A	56	FGW40N120H	48
7MBR35VB120-50	14	7MBR75VX120-50	17	F5063L	95	FA5681N	59	FDCP10S65	55	FGW40N120HD	48

Type Number Index

Page	Page	Page	Page	Page	Page	Page					
FGW40N120VD	48	FMC13N60E	81	FMH22N60S1FD	78	FML60N093S2FD	76	FMP60N160S2	74	FMV15N60S1	77
FGW40N120W	47	FMC13N60ES	84	FMH23N50E	80	FML60N103S2	74	FMP60N170S2FD	76	FMV15N70E	81
FGW40N120WD	47	FMC16N50E	80	FMH23N50ES	83	FML60N104S2FD	76	FMP60N190S2	74	FMV16N50E	80
FGW40N120WE	47	FMC16N50ES	83	FMH23N60E	81	FML60N115S2	74	FMP60N280S2	74	FMV16N50ES	83
FGW40N65W	47	FMC16N60E	81	FMH23N60ES	84	FML60N118S2FD	76	FMP60N380S2	74	FMV16N60E	81
FGW40N65WD	47	FMC16N60ES	84	FMH28N50E	80	FML60N146S2	74	FMP65N15T2	90	FMV16N60ES	84
FGW40N65WE	47	FMC20N50E	80	FMH28N50ES	83	FML60N150S2FD	76	FMP80N10T2	90	FMV17N60ES	84
FGW40XS65	47	FMC20N50ES	83	FMH30N60S1	77	FML60N187S2	74	FMR09N90E	82	FMV19N60E	81
FGW40XS65C	47	FMC29N60S1FDA	91	FMH30N60S1FD	78	FML60N191S2FD	76	FMR11N90E	82	FMV19N60ES	84
FGW50N60H	48	FMC40N060S2FDA	93	FMH35N60S1	77	FML60N223S2	74	FMR17N60ES	84	FMV20N50E	80
FGW50N60HC	48	FMC49N20T2	90	FMH35N60S1FD	78	FMP03N60E	81	FMR19N60E	81	FMV20N50ES	83
FGW50N60HD	48	FMC50N071S2FDA	93	FMH40N60S1	77	FMP05N50E	80	FMR19N60ES	84	FMV20N60S1	77
FGW50N60VD	48	FMC60N079S2A	92	FMH40N60S1FD	78	FMP05N60E	81	FMR21N50ES	83	FMV20N60S1FD	78
FGW50N65W	47	FMC60N081S2FDA	93	FMH47N60S1	77	FMP06N60E	81	FMR23N50E	80	FMV21N50ES	83
FGW50N65WD	47	FMC60N088S2A	92	FMH47N60S1FD	78	FMP06N60ES	84	FMR23N50ES	83	FMV22N60S1	77
FGW50N65WE	47	FMC60N099S2A	92	FMH60N190S2	74	FMP07N50E	80	FMR23N60E	81	FMV22N60S1FD	78
FGW50XS65	47	FMC60N105S2FDA	93	FMH60N280S2	74	FMP07N60S1	77	FMR23N60ES	84	FMV23N50E	80
FGW50XS65C	47	FMC60N125S2A	92	FMI03N60E	81	FMP08N50E	80	FMR28N50E	80	FMV23N50ES	83
FGW60N65W	47	FMC60N133S2FDA	93	FMI05N50E	80	FMP08N60S1	77	FMR28N50ES	83	FMV24N25G	86
FGW60N65WD	47	FMC60N160S2A	92	FMI05N60E	81	FMP10N60E	81	FMV03N60E	81	FMV30N60S1	77
FGW60N65WE	47	FMC65N15T2	90	FMI06N60ES	84	FMP10N60S1	77	FMV05N50E	80	FMV30N60S1FD	78
FGW75N60H	48	FMC80N10R6	90	FMI06N80E	81	FMP11N60E	81	FMV05N60E	81	FMV35N60S1	77
FGW75N60HC	48	FMC80N10R6	94	FMI06N90E	82	FMP12N50E	80	FMV06N60E	81	FMV35N60S1FD	78
FGW75N60HD	48	FMC80N10T2	90	FMI07N50E	80	FMP12N50ES	83	FMV06N60ES	84	FMV40N60S1	77
FGW75N65W	47	FMH06N80E	81	FMI07N90E	82	FMP12N60ES	84	FMV06N80E	81	FMV60N070S2	75
FGW75N65WE	47	FMH06N90E	82	FMI08N80E	81	FMP13N60E	81	FMV06N90E	82	FMV60N075S2FD	76
FGW75XS65	47	FMH07N70E	81	FMI10N60E	81	FMP13N60ES	84	FMV07N50E	80	FMV60N079S2	75
FGW75XS65C	47	FMH07N90E	82	FMI11N60E	81	FMP13N60S1	77	FMV07N60S1	77	FMV60N084S2FD	76
FGW85N60RB	48	FMH08N80E	81	FMI12N50E	80	FMP15N60S1	77	FMV07N65E	81	FMV60N088S2	75
FGZ40N120WE	47	FMH09N70E	81	FMI12N50ES	83	FMP16N50E	80	FMV07N70E	81	FMV60N094S2FD	76
FGZ50N65WD	47	FMH09N90E	82	FMI12N60ES	84	FMP16N50ES	83	FMV07N90E	82	FMV60N099S2	74
FGZ50N65WE	47	FMH10N80E	81	FMI13N60E	81	FMP16N60E	81	FMV08N50E	80	FMV60N105S2FD	76
FGZ75N65WE	47	FMH11N70E	81	FMI13N60ES	84	FMP16N60ES	84	FMV08N60S1	77	FMV60N125S2	74
FMA49N20T2	90	FMH11N90E	82	FMI16N50E	80	FMP20N50E	80	FMV08N80E	81	FMV60N133S2FD	76
FMA65N15T2	90	FMH13N60ES	84	FMI16N50ES	83	FMP20N50ES	83	FMV09N65E	81	FMV60N160S2	74
FMA80N10T2	90	FMH13N60S1	77	FMI16N60E	81	FMP20N60S1	77	FMV09N70E	81	FMV60N170S2FD	76
FMC03N60E	81	FMH13N80E	81	FMI16N60ES	84	FMP20N60S1FD	78	FMV09N90E	82	FMV60N190S2	74
FMC05N50E	80	FMH15N60S1	77	FMI20N50E	80	FMP22N60S1	77	FMV10N60E	81	FMV60N280S2	74
FMC05N60E	81	FMH16N50E	80	FMI20N50ES	83	FMP22N60S1FD	78	FMV10N60S1	77	FMV60N380S2	74
FMC06N60ES	84	FMH16N50ES	83	FMI49N20T2	90	FMP30N60S1	77	FMV10N80E	81	FMW15N60S1	77
FMC06N80E	81	FMH16N60ES	84	FMI65N15T2	90	FMP30N60S1FD	78	FMV11N60E	81	FMW20N60S1	77
FMC06N90E	82	FMH17N60ES	84	FMI80N10T2	90	FMP49N20T2	90	FMV11N70E	81	FMW20N60S1FD	78
FMC07N50E	80	FMH19N60E	81	FML12N50ES	83	FMP60N079S2	75	FMV11N90E	82	FMW22N60S1	77
FMC07N90E	82	FMH19N60ES	84	FML12N60ES	84	FMP60N084S2FD	76	FMV12N50E	80	FMW22N60S1FD	78
FMC08N80E	81	FMH20N50E	80	FML13N60ES	84	FMP60N088S2	75	FMV12N50ES	83	FMW30N60S1	77
FMC10N60E	81	FMH20N50ES	83	FML16N50ES	83	FMP60N094S2FD	76	FMV12N60ES	84	FMW30N60S1FD	78
FMC11N60E	81	FMH20N60S1	77	FML16N60ES	84	FMP60N099S2	74	FMV13N60E	81	FMW35N60S1	77
FMC12N50E	80	FMH20N60S1FD	78	FML19N50G	87	FMP60N105S2FD	76	FMV13N60ES	84	FMW35N60S1FD	78
FMC12N50ES	83	FMH21N50ES	83	FML20N50ES	83	FMP60N125S2	74	FMV13N60S1	77	FMW40N60S1	77
FMC12N60ES	84	FMH22N60S1	77	FML60N091S2	74	FMP60N133S2FD	76	FMV13N80E	81	FMW40N60S1FD	78

Type Number Index

Page	Page	Page	Page	Page	Page
FMW47N60S1 77	FMY60N105S2FDA 93	TP862C15R 103	YA865C15R 103	YG838C04R 103	YG982C3R 99
FMW47N60S1FD 78	FMY60N125S2A 92	TP865C12R 103	YA868C04R 102	YG861S12R 101	YG982C4R 107
FMW57N60S1 77	FMY60N133S2FDA 93	TP865C15R 103	YA868C06R 102	YG861S15R 101	YG982C6R 105
FMW57N60S1FD 78	FMY60N160S2A 92	TP868C10R 103	YA868C08R 102	YG862C06R 102	YG982S6R 105
FMW60N025S2 75	FMY67N30ESF 94	TP869C06R 102	YA868C10R 103	YG862C08R 102	YG985C3R 107
FMW60N027S2FD 76	FMY67N60S1FDA 91	TP869C08R 102	YA868C12R 103	YG862C10R 103	YG985C4R 107
FMW60N040S2 75	FMY68N60S1A 91	TP869C10R 103	YA868C15R 103	YG862C12R 103	YG985C6R 105
FMW60N043S2FD 76	FMY72N30ES 94	TP901C2R 108	YA869C06R 102	YG862C15R 103	
FMW60N055S2 75	KP883C02 99	TP902C2R 108	YA869C08R 102	YG865C04R 102	
FMW60N059S2FD 76	KP923C2 106	TP902C3R 108	YA869C10R 103	YG865C06R 102	
FMW60N070S2 75	KP926S2 106	TP906C2R 108	YA869C12R 103	YG865C08R 102	
FMW60N075S2FD 76	KS823C03 99	TS802C04R 108	YA869C15R 103	YG865C10R 103	
FMW60N079S2 75	KS823C04 99	TS805C04R 108	YA872C10R 100	YG865C12R 103	
FMW60N084S2FD 76	KS823C09 99	TS808C06R 108	YA872C12R 100	YG865C15R 103	
FMW60N088S2 75	KS826S04 98	TS862C06R 102	YA872C15R 100	YG868C04R 102	
FMW60N094S2FD 76	KS883C02 99	TS862C08R 102	YA872C20R 100	YG868C06R 102	
FMW60N099S2 74	KS923C2 106	TS862C10R 103	YA875C10R 100	YG868C08R 102	
FMW60N105S2FD 76	KS926S2 106	TS862C12R 103	YA875C12R 100	YG868C10R 103	
FMW60N125S2 74	KS986S3 107	TS862C15R 103	YA875C15R 100	YG868C12R 103	
FMW60N133S2FD 76	KS986S4 107	TS865C04R 102	YA875C20R 100	YG868C15R 103	
FMW60N160S2 74	MS808C06 99	TS865C06R 102	YA878C10R 100	YG869C06R 102	
FMW60N170S2FD 76	MS838C04 99	TS865C08R 102	YA878C12R 100	YG869C08R 102	
FMW60N190S2 74	MS862C08 102	TS865C10R 103	YA878C15R 100	YG869C10R 103	
FMW79N60S1 77	MS865C04 102	TS865C12R 103	YA878C20R 100	YG869C12R 103	
FMW79N60S1FD 78	MS865C08 102	TS865C15R 103	YA971S6R 104	YG869C15R 103	
FMY100N06T 94	MS865C10 103	TS868C04R 102	YA972S6R 104	YG872C10R 100	
FMY100N10R6 90	MS865C12 103	TS868C06R 102	YA975C6R 104	YG872C12R 100	
FMY100N10R6 94	MS865C15 103	TS868C08R 102	YA981S6R 105	YG872C15R 100	
FMY22N60ESF 94	MS868C04 102	TS868C10R 103	YA982C3R 107	YG872C20R 100	
FMY24N60ES 94	MS868C10 103	TS868C12R 103	YA982C4R 107	YG875C10R 100	
FMY29N60S1FDA 91	MS868C12 103	TS868C15R 103	YA982C6R 105	YG875C12R 100	
FMY30N60ESF 94	MS868C15 103	TS902C2R 108	YA982S6R 105	YG875C15R 100	
FMY31N60ES 94	MS906C2 106	TS902C3R 108	YA985C3R 107	YG875C20R 100	
FMY35N60ESF 94	MS906C3 106	TS906C2R 108	YA985C4R 107	YG878C10R 100	
FMY36N60ES 94	MS985C3 107	TS982C3R 107	YA985C6R 105	YG878C12R 100	
FMY46N60S1FDA 91	MS985C4 107	TS982C4R 107	YG801C04R 99	YG878C15R 100	
FMY47N30ESF 94	PA868C10R 103	TS982C6R 105	YG801C06R 99	YG878C20R 100	
FMY47N60S1A 91	PA868C15R 103	TS985C3R 107	YG801C10R 99	YG901C2R 106	
FMY50N071S2FDA 93	PA905C4R 108	TS985C4R 107	YG802C04R 99	YG901C3R 106	
FMY50N30ES 94	PG865C15R 103	TS985C6R 105	YG802C06R 99	YG902C2R 106	
FMY52N60S1FDA 91	PG985C3R 107	YA862C06R 102	YG802C10R 99	YG902C3R 106	
FMY52N65S1FDA 91	PG985C4R 107	YA862C08R 102	YG803C06R 99	YG906C2R 106	
FMY53N60S1A 91	PH865C12 103	YA862C10R 103	YG804S06R 98	YG911S2R 106	
FMY60N025S2A 92	PH865C15 103	YA862C12R 103	YG805C04R 99	YG911S3R 106	
FMY60N040S2A 92	PH868C12 103	YA862C15R 103	YG805C06R 99	YG912S2R 106	
FMY60N070S2A 92	PH868C15 103	YA865C04R 102	YG805C10R 99	YG971S6R 104	
FMY60N079S2A 92	PH975C6 104	YA865C06R 102	YG808C10R 99	YG971S8R 104	
FMY60N081S2FDA 93	PH985C6 105	YA865C08R 102	YG811S04R 98	YG972S6R 104	
FMY60N088S2A 92	TP802C04R 108	YA865C10R 103	YG811S06R 98	YG975C6R 104	
FMY60N099S2A 92	TP862C12R 103	YA865C12R 103	YG812S04R 98	YG981S6R 105	

Maintenance products

- Models listed below are for maintenance products only.
- Do not use them for new designing

Products	Type number	Products	Type number	Products	Type number
Power Devices	1MBI1200U4C-120	Power Devices	2MBI300UC-170	Power Devices	6MBP25RU2A120
	1MBI1200U4C-170		2MBI300UD-120		6MBP25TEA120-50
	1MBI1600U4C-120		2MBI300UD-120-50		6MBP300RA060
	1MBI1600U4C-170		2MBI300UE-120		6MBP30RTB060
	1MBI2400U4D-120		2MBI400U2B-060-50		6MBP30RTB060-50
	1MBI2400U4D-170		2MBI400U4H-120		6MBP35RJB120-50
	1MBI300U4-120		2MBI400U4H-120-50		6MBP50RA060
	1MBI3600U4D-120		2MBI400U4H-170		6MBP50RA120
	1MBI3600U4D-170		2MBI400U4H-170-50		6MBP50RJ120
	1MBI400U4-120		2MBI450U4E-120		6MBP50RTB060
	1MBI600U4-120		2MBI450U4J-120-50		6MBP50RTB060-50
	1MBI600U4B-120		2MBI450U4N-120-50		6MBP50RTJ060
	1MBI800U4B-120		2MBI450U4N-170-50		6MBP50RU2A120
	2MBI100TA-060-50		2MBI450UE-120		6MBP50TBA060-50
	2MBI100U4A-120		2MBI600U4G-120		6MBP50TEA060
	2MBI100U4A-120-50		2MBI600U4G-170		6MBP50TEA060-50
	2MBI100U4H-170-50		2MBI75U4A-120		6MBP50TEA120-50
	2MBI1200U4G-120		2MBI75U4A-120-50		6MBP75RA060
	2MBI1200U4G-170		2MBI75UA-120		6MBP75RA120
	2MBI150TA-060-50		2MBI75UA-120-50		6MBP75RJ120
	2MBI150U2A-060-50		2MBI800U4G-120		6MBP75RTB060
	2MBI150U4A-120		2MBI800U4G-170		6MBP75RTB060-50
	2MBI150U4A-120-50		4MBI100T-060		6MBP75RTJ060
	2MBI150U4B-120		6MBI35U4A-120-50		6MBP75RU2A120
	2MBI150U4B-120-50		6MBI50U4A-120-50		6MBP75RU2A120-50
	2MBI150U4H-120		6MBI50UA-120-50		6MBP75TBA060-50
	2MBI150U4H-120-50		6MBI75U4A-120-50		6MBP75TEA060-50
	2MBI150U4H-170		6MBI75U4B-120-50		6MBP75TEA120-50
	2MBI150U4H-170-50		6MBI75UA-120-50		7MBP25RA120
	2MBI150UA-120		6MBI100U4B-120-50		7MBP25RU2A120-50
	2MBI150UA-120-50		6MBI100UB-120-50		7MBP50RE120
	2MBI150UB-120-50		6MBI150U4B-120-50		7MBP50RTA060-50
	2MBI200U2A-060-50		6MBI150UB-120-50		7MBP50RTB060-50
	2MBI200U4B-120		6MBI225U4-120		7MBP50RU2A120-50
	2MBI200U4B-120-50		6MBI225U4-120-50		7MBP75RE120
	2MBI200U4D-120		6MBI300U4-120		7MBP75RTB060-50
	2MBI200U4D-120-50		6MBI300U4-120-50		7MBP75RU2A120
	2MBI200U4H-120		6MBI300U4-170		7MBP75RU2A120-50
	2MBI200U4H-120-50		6MBI450U-120		7MBP75TEA060-50
	2MBI200U4H-170		6MBI450U-170		7MBP75TEA120-50
	2MBI200U4H-170-50		6MBI450U4-120		7MBP80RTA060-50
	2MBI200UB-120		6MBI450U4-120-50		7MBP100RA060
	2MBI200UB-120-50		6MBI450U4-170		7MBP100RA120
	2MBI200UC-120-50		6MBP100RA060		7MBP100RTA060-50
	2MBI200UD-120-50		6MBP100RA120		7MBP100RTB060
	2MBI200UM-120		6MBP100RTB060		7MBP100RTB060-50
	2MBI225U4J-120-50		6MBP100RTB060-50		7MBP100RTJ060
	2MBI225U4N-120-50		6MBP100RTD060-50		7MBP100TEA060-50
	2MBI225U4N-170-50		6MBP100RTJ060		7MBP150RA060
	2MBI300U2B-060-50		6MBP100TEA060		7MBP150RA120
	2MBI300U4D-120		6MBP100TEA060-50		7MBP150RTB060
	2MBI300U4D-120-50		6MBP150RA060		7MBP150RTB060-50
	2MBI300U4E-120		6MBP150RA120		7MBP150RTJ060
	2MBI300U4H-120		6MBP150RTB060		7MBP150TEA060-50
	2MBI300U4H-120-50		6MBP150RTB060-50		7MBP160RTA060-50
	2MBI300U4H-170		6MBP150RTJ060		7MBP200RA060
	2MBI300U4H-170-50		6MBP150TEA060-50		7MBP200RUC060
	2MBI300U4J-120-50		6MBP15RA120		7MBP200RUC060-50
	2MBI300U4N-120-50		6MBP200RA060		7MBR10UF120
	2MBI300U4N-170-50		6MBP20RTA060		7MBR15UF060
	2MBI300UC-120		6MBP25RA120		7MBR15UF120
	2MBI300UC-120-50		6MBP25RJ120		7MBR20UF060

Maintenance products

Products	Type number	Products	Type number
Power Devices	7MBR25U4P120-50 7MBR25UA120-50 7MBR30UF060 7MBR35U4A120-50 7MBR35U4P120-50 7MBR35UA120-50 7MBR35UB120-50 7MBR50U4P120-50 7MBR50UA120-50 7MBR50UB120-50 7MBR75U4B120-50 7MBR75U4R120-50 7MBR75UB120-50 7MBR100U4B120-50 7MBR100UB120-50	Rectifier Diodes	CB803-03 CB863-06 CB863-12 CB863-15 CB903-4 ERA81-004 ERA82-004 ERA83-004 ERA83-006 ERA84-009 ERA85-009 ERA91-02 ERA92-02 ERB81-004 ERB83-004 ERB83-006 ERB84-009 ERB91-02 ERB93-02 ERC81-004 ERC81-006 ERC81S-004 ERC84-009 ERC91-02 FD867-12 FD867-15 FD868-12 FD868-15 SC802-04 SC802-06 SC802-09 SC902-2 SD832-03 SD832-04 SD833-03 SD833-04 SD833-06 SD833-09 SD834-03 SD834-04 SD862-04 SD863-04 SD863-06 SD863-10 SD882-02 SD883-02 SD883-04

Discontinued products

- Models listed below are discontinued products.
- Do not use them for new designing

Products	Type number	Products	Type number	Products	Type number
Power Devices	1MBI150NH-060 1MBI150NK-060 1MBI200N-120 1MBI200NH-060 1MBI200NK-060 1MBI300N-120 1MBI300NN-120 1MBI300NP-120 1MBI400N-120 1MBI400NN-120 1MBI400NP-120 1MBI600NN-060 1MBI600NP-060 2MBI100N-060 2MBI100N-120 2MBI100NB-120 2MBI100NC-120 2MBI150N-060 2MBI150N-120 2MBI150NB-120 2MBI150NC-060 2MBI150NC-120 2MBI200N-060 2MBI200N-060-03 2MBI200N-120 2MBI200NB-120 2MBI200NB-120-01 2MBI300N-060 2MBI300N-060-04 2MBI300N-120 2MBI300N-120-01 2MBI300NB-060 2MBI300NB-060-01 2MBI400N-060 2MBI400N-060-01 2MBI50N-060 2MBI50N-120 2MBI600NT-060 2MBI75N-060 2MBI75N-120 4MBI75T-060 4MBI100T-060 4MBI150T-060 4MBI200T-060 1MBI600PX-120 1MBI600PX-140 2MBI100PC-140 2MBI100SC-120 2MBI150PC-140 2MBI150SC-120 2MBI200PB-140 2MBI200S-120 2MBI300P-140 2MBI300S-120 2MBI50P-140 2MBI75P-140 6MBI100S-060 6MBI100S-120 6MBI100S-140 6MBI10S-120 6MBI15S-120 6MBI25S-120 6MBI35S-120	Power Devices	6MBI35S-140 6MBI50S-060 6MBI50S-120 6MBI50S-140 6MBI75S-060 6MBI75S-120 6MBI75S-140 6MBP15RH060-50 6MBP20RH060-50 6MBP30RH060-50 7MBR100SB060 7MBR100SD060 7MBR10SA120 7MBR10SA140 7MBR10SC120 7MBR15SA120 7MBR15SA140 7MBR15SC120 7MBR20SC060 7MBR25SA120 7MBR25SA140 7MBR25SC120 7MBR30SA060 7MBR30SC060 7MBR35SB120 7MBR35SB140 7MBR35SD120 7MBR50SA060 7MBR50SB060 7MBR50SB120 7MBR50SB140 7MBR50SC060 7MBR50SD120 7MBR75SB060 7MBR75SD060	IPS (Intelligent Power switch)	F5016H F5017H F5021H F5022 F5038H
		Integrated Circuits	FA3635S-H1 FA3675F-H1 FA3702AV-H1 FA5316P FA5317S FA5701P-A2 FA5705AP-A2 FA5707AP-A2 FA5708AP-A2 FA7709R-H1 FA7716R-H4 FA7723R-H4 FA7724R-H4 FA7724AR-H4 FA7728F-D1 FA7729R-H1 FA7730F-D1 FA7731F-D1 FA7743N-D1	Rectifier Diodes	FDLA20C20 FDLC20C20 FDLH20C20 FDLP20C20 FDLR20C20 KP823C03 KP823C04 KP823C09 PA955C6R PG985C6R TP858C12R TP869C04R TS862C04R TS906C3R TS952C6R TS955C6R YA852C12R YA852C15R YA855C12R YA855C15R YA858C12R YA858C15R YA862C04R YA869C04R YA951S6R YA952C6R YA952S6R YA955C6R YG801C09R YG802C03R YG802C09R YG803C04R YG811S09R YG831C03R YG831C04R YG832C03R YG832C04R YG835C03R YG835C04R YG838C03R YG852C12R YG852C15R YG855C12R YG855C15R YG858C12R YG858C15R YG862C04R YG864S06R YG869C04R YG881C02R YG882C02R YG885C02R YG906C3R YG951S6R YG952C6R YG952S6R YG955C6R
		Hybrid ICs for IGBT Drive	EXB840 EXB841		

Discontinued products

Products	Type number	Products	Type number
Power MOSFET	2SJ314-01L, S	Power MOSFET	2SK3679-01MR
	2SJ472-01L, S		2SK3690-01
	2SJ473-01L, S		2SK3691-01MR
	2SJ474-01L, S		2SK3769-01MR
	2SJ475-01		2SK3770-01MR
	2SJ476-01L, S		2SK3771-01MR
	2SJ477-01MR		2SK3776-01
	2SK2687-01		2SK3777-01R
	2SK2688-01L, S		2SK3780-01
	2SK2689-01MR		2SK3781-01R
	2SK2690-01		2SK3788-01
	2SK2691-01R		2SK3789-01R
	2SK2806-01		2SK3870-01
	2SK2807-01L, S		2SK3871-01MR
	2SK2808-01MR		2SK3872-01L, S
	2SK2809-01MR		2SK3873-01
	2SK2890-01MR		2SK3874-01R
	2SK2891-01		2SK3875-01
	2SK2892-01R		2SK3876-01R
	2SK2893-01		2SK3883-01
	2SK2894-01R		2SK3884-01
	2SK2895-01		2SK3885-01
	2SK2896-01L, S		2SK3913-01MR
	2SK2897-01MR		2SK3914-01
	2SK2898-01		2SK3915-01MR
	2SK2899-01R		2SK3923-01
	2SK2900-01		2SK3924-01L, S
	2SK2901-01L, S		2SK3925-01
	2SK2902-01MR		2SK3926-01MR
	2SK2903-01MR		2SK3927-01L, S
	2SK2904-01		2SK4005-01MR
	2SK2905-01R		2SK4006-01L, S
	2SK2906-01		FMA18N25G
	2SK2907-01R		
	2SK3362-01		
	2SK3363-01		
	2SK3364-01		
	2SK3517-01		
	2SK3518-01MR		
	2SK3529-01		
	2SK3530-01MR		
	2SK3531-01		
	2SK3532-01MR		
	2SK3533-01		
	2SK3534-01MR		
	2SK3549-01		
	2SK3550-01R		
	2SK3586-01		
	2SK3587-01MR		
	2SK3588-01L, S		
	2SK3589-01		
	2SK3601-01		
	2SK3605-01		
	2SK3613-01		
	2SK3644-01		
	2SK3645-01MR		
	2SK3646-01L, S		
	2SK3647-01		
	2SK3673-01MR		
	2SK3674-01L, S		
	2SK3675-01		
	2SK3677-01MR		
	2SK3678-01		

Global semiconductor website

We will continue to keep our global semiconductor website updated and fulfilled with new information on our semiconductor products including new products release, search function, data sheets, and the related exhibition for our customers all over the world.

We hope it will be of much use to our customers. Thank you.

Japanese: www.fujielectric.co.jp/products/semiconductor/

English: www.fujielectric.com/products/semiconductor/

Chinese: www.fujielectric.com/products/semiconductor/cn/

We would like to thank you for your continued patronage and further support for our semiconductor products.

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of March 2018. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Co., Ltd. is (or shall be deemed) granted. Fuji Electric Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.

• Computers	• OA equipment	• Communications equipment (terminal devices)	• Measurement equipment
• Machine tools	• Audiovisual equipment	• Electrical home appliances	• Personal equipment
			• Industrial robots etc.
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.

• Transportation equipment (mounted on cars and ships)	• Trunk communications equipment
• Traffic-signal control equipment	• Gas leakage detectors with an auto-shut-off feature
• Emergency equipment for responding to disasters and anti-burglary devices	• Safety devices
• Medical equipment	
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).

• Space equipment	• Aeronautic equipment	• Nuclear control equipment
• Submarine repeater equipment		
7. Copyright ©1996-2018 by Fuji Electric Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.

FE Fuji Electric Co.,Ltd.

Power Semiconductors Group

URL www.fujielectric.com/products/semiconductor/

Head Office:

Gate City Ohsaki, East Tower, 11-2 Osaki 1-chome,
Shinagawa-ku, Tokyo 141-0032, Japan

Fuji Electric Hong Kong Co., Ltd.

Suites 1911-13, 19/F, Tower 6, The Gateway, Harbour City,
Tsim Sha Tsui, Kowloon, Hong Kong
Tel: +852-2664-8699

Fuji Electric Taiwan Co., Ltd.

10F. No.168, Song Jiang Road, Taipei, Taiwan
Tel: +886-2-2515-1850

Fuji Electric Asia Pacific Pte. Ltd.

151 Lorong Chuan, #03-01/01A New Tech Park, SINGAPORE 556741
Tel: +65-6533-0014

Fuji Electric India Private Ltd.

409-410, Meadows, Sahar Plaza, J.B. Nagar Andheri-Kurla Road,
Andheri (E), Mumbai, India 400059
Tel: +91-22-4010-4870

Fuji Electric (China) Co., Ltd.

26F, Global Harbor Tower B,
1188 North KaiXuan Road, PuTuo District,
Shanghai 200062, P.R.China
Tel: +86-21-5496-1177

Fuji Electric Corp. of America

50 Northfield Avenue
Edison, NJ 08837, USA
Tel: +1-732-560-9410

Fuji Electric Europe GmbH



Goethering 58, 63067 Offenbach, am Main, F.R. GERMANY
Tel: +49-69-6690290



Power Semiconductors

March 2018

IGBT Modules, MOSFETs, All SiC Modules, SiC-Schottky Diodes and Discrete IGBTs

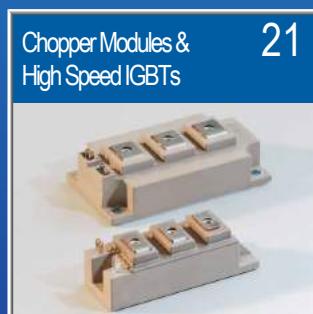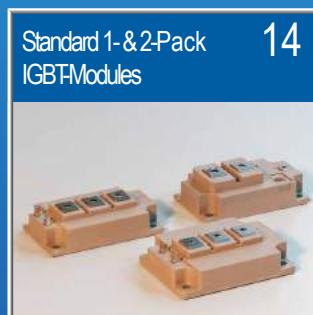

Fuji Electric Corp. of America
50 Northfield Avenue
Edison, NJ 08837 USA

Tel: (732)560-9410
Fax: (732)457-0042

xfea-semi-group@fujielectric.com
www.americas.fujielectric.com

Email



Website



Industrialized Process for Pre-applied Thermal Interface Material (TIM)



Fuji Electric's printing process of pre-applied TIM is automated and carried out by a computer controlled printing line under clean environment.

Precise printing equipment and optimized module specific printing patterns guaranty a uniform print and maximum thermal conductivity.

3D-imaging tests ensure the compliance of our specified TIM thickness.

The whole process is controlled by our qualified staff to ensure our high quality standards.

Features

- + Optimized for Fuji Electric modules
- + Increase lifetime of IGBT
- + Advanced IGBT power density

Process - Benefits

- + Outsourcing of a dirty process
- + Stable quality level
- + Increased system reliability

Thermal - Benefits

- + Higher thermal conductivity
- + Uniform thermal resistance
- + Higher reliability and life time.

Our range of modules with pre-applied TIM is being continually expanded

For latest availability status please contact us


About Type Name

The Type Name is not exactly the item code for the ordering process

1. Modules with Standard IGBT-Chips

2 M Bi 450 V H - 120 - 50

→ Current class I_c [A]
 → Device type & configuration
 MBI : Standard IGBT module (1-, 2- and 6-pack)
 MBR : PIM IGBT (Power Integrated Module)
 MBP : IPM IGBT (Intelligent Power Module)
 MSi, MSR: The "S" indicates hybrid module with Si-IGBT & SiC Schottky free wheeling diodes

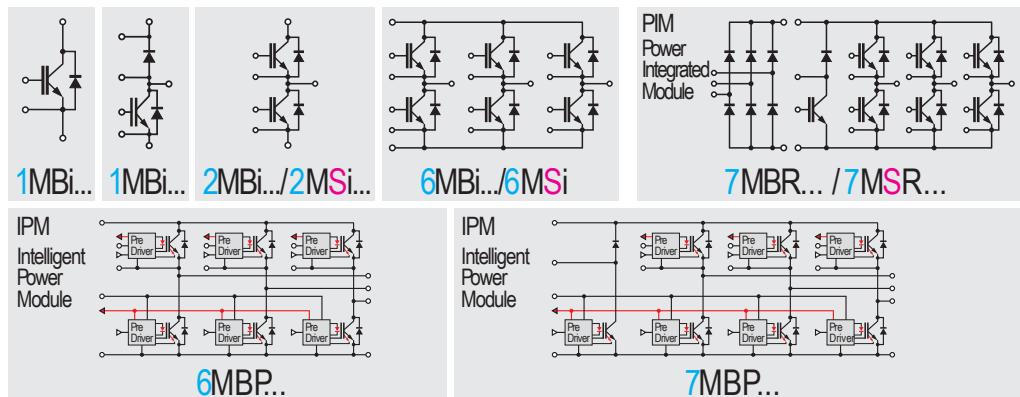


→ Suffix - 50 = RoHS compliant

→ Voltage class: 060= 600V · 065= 650V · 120= 1200V · 170= 1700V · 330= 3300V

→ Package Style

IGBT-series (here V-Series) / IGBT-technology

IGBT development

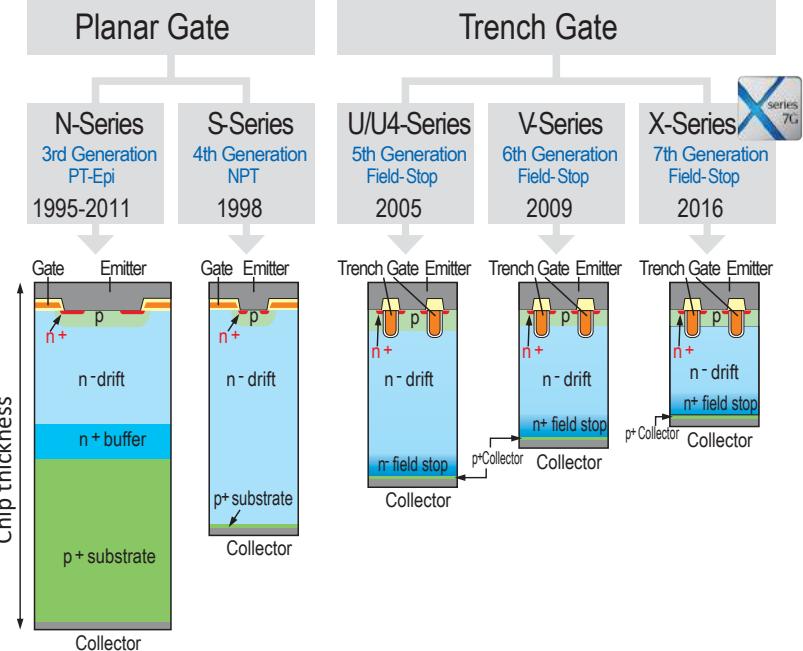

→ Number of IGBT-switches (not chips)

About Type Name


The Type Name is not exactly the item code for the ordering process

2. Modules with RB-IGBT (Reverse Blocking IGBT)


4 M Bi300 VG - 120 R1 - 50

Voltage class of inverter part
060= 600V
120=1200V
170=1700V


R = 600V
R1= 900V
R2=1200V

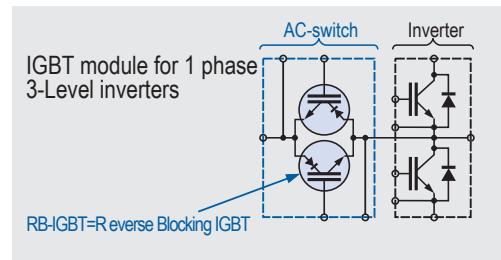

3. Discrete IGBTs

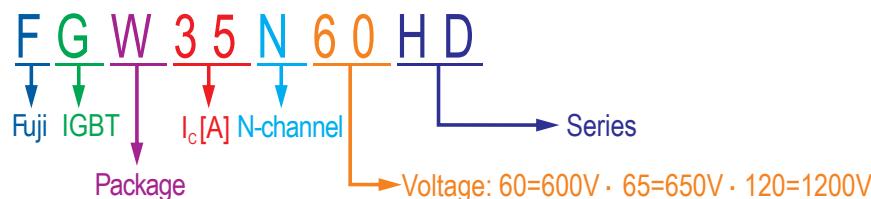

4. Super-Junction MOSFETs

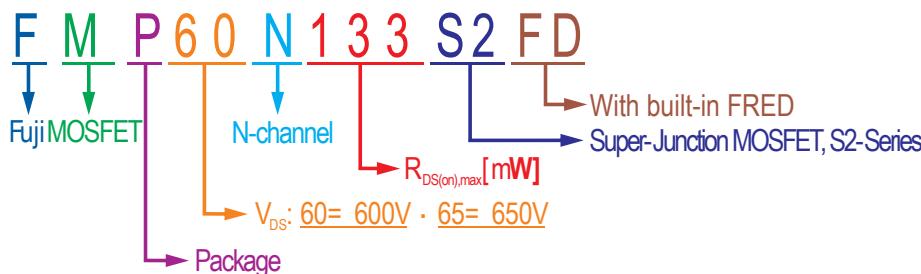


5. SiC Schottky Barrier Diodes





IGBT -Modules for 3-Level Inverters




	I_C	600V		1200V		1700V	
		V-Series 6th Generation	AC-switch	V-Series 6th Generation	AC-switch	V-Series 6th Generation	AC-switch
3 Phase	50A			12MBi 50VN-120-50	600V		
	75A			12MBi 75VN-120-50	600V		
	100A			12MBi 100VN-120-50	600V		
3 Phase	50A			12MBi 50VX-120-50	600V		
	75A			12MBi 75VX-120-50	600V		
	100A			12MBi 100VX-120-50	600V		
1 Phase	220A					4MBi 220VF-170R2-50	1200V
	300A			4MBi 300VG-120R-50	600V		
	340A			4MBi 300VG-120R1-50	900V		
	400A	4MBi 400VG-060R-50	600V	4MBi 340VF-120R-50	600V	4MBi 400VF-120R-50	600V

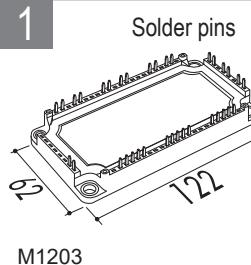

RB-IGBT=Reverse Blocking IGBT

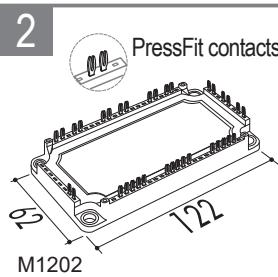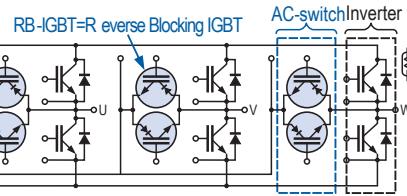

RB-IGBT=Reverse Blocking IGBT

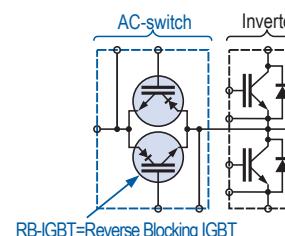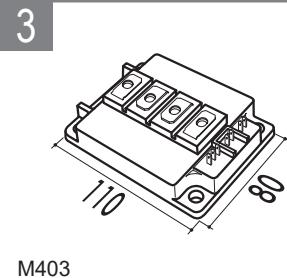
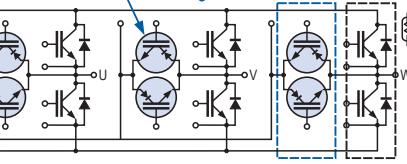


RB-IGBT=Reverse Blocking IGBT



AC-switch

Inverter

IGBT -Modules for 3-Level Inverters

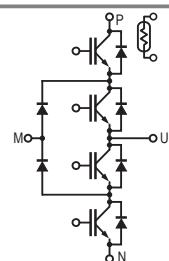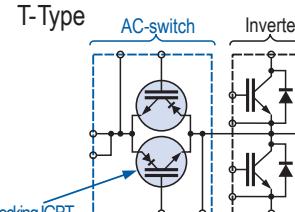1 Phase	I	1200V		1700V	
		V-Series 6th Generation	AC-switch	V-Series 6th Generation	AC-switch
4	I-Type		I _C 600A 4MBi 600VC-120-50		
	T-Type		450A 600A 650A 900A	900V 4MBi 450VB-120R1-50 4MBi 600VB-170R2-50 900V	1200V 4MBi 450VB-170R2-50 1200V
					

AC - switch

2-Pack	I	1200V	
		V-Series 6th Generation	
5			I _C 450A 2MBi 450VH-120F-50
			





Hybrid IGBT-Modules with SiC-SBD ➔







 I_C 1200V
V-Series
6th Generation1700V
V-Series
6th Generation

2-Pack	6			200A	2MSi 200VAB-120-53	
	7			300A	2MSi 300VAH-120C-53	
	8			400A		2MSi 400VAE-170-53
	9			300A	2MSi 300VAN-120-53*	
				450A	2MSi 450VAN-120-53*	2MSi 450VAN-170-53*
				550A		2MSi 550VAN-170-53*
				600A	2MSi 600VAN-120-53*	
	10			1200A		2MSi 1200VAT-170 PC* 2MSi 1200VAT-170 EC*

Suffix -53 = With $V_{CE,sat}$ & V_F rank label

* Under Development

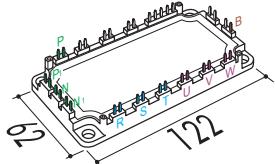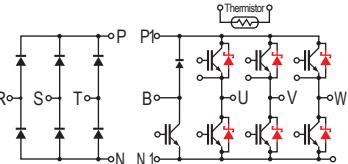Hybrid IGBT-Modules with SiC-SBD ➔			I_C	600V	1200V
PIM	V-Series 6th Generation			V-Series 6th Generation	V-Series 6th Generation
11			35A	7MSR 35VB-120-50	
			50A	7MSR 50VB-060-50	7MSR 50VB-120-50
			75A	7MSR 75VB-060-50	
			100A	7MSR 100VB-060-50	
12			100A		
				6MSi 100VB-120-50	



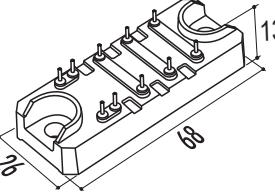

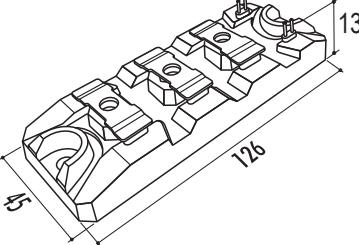

All SiC 2in1modules (SiC MOS-FET & SiC Schottky diode)			1st gen. Trench MOS	
PIM	Circuit Diagram		Current Rating	Part Number
13			25A	2CSi 25CAN120A-50*
			50A	2CSi 50CAN120A-50*
14			75A	2CSi 75CAM120A-50*
			100A	2CSi 100CAM120A-50*
15			200A	2CSi 200CAS120A-50 *
			300A	2CSi 300CAS120A-50 *
			400A	2CSi 400CAS120A-50 *

* Under development

Small PIM IGBTs (Power Integrated Modules)

	I_C	600V	650V	1200V
		V-Series 6th Generation	X-Series 7th Generation	V-Series 6th Generation
With PressFit Contacts				
16	10A	7MBR 10VKA-060-50	7MBR 10XKA65-50	7MBR 10VKA-120-50
	15A	7MBR 15VKA-060-50	7MBR 15XKA065-50	7MBR 15VKA-120-50
	20A	7MBR 20VKA-060-50	7MBR 20XKA065-50	
	25A			7MBR 25XKA120-50
	30A	7MBR 30VKA-060-50	7MBR 30XKA065-50	
17	15A			7MBR 15VKB-120-50
	25A			7MBR 25VKB-120-50
	35A			7MBR 35VKB-120-50
	50A	7MBR 50VKB-060-50	7MBR 50XKB065-50	
18	10A	7MBR 10VKC-060-50	7MBR 10XKC065-50	7MBR 10VKC-120-50
	15A	7MBR 15VKC-060-50	7MBR 15XKC065-50	7MBR 15VKC-120-50
	20A	7MBR 20VKC-060-50	7MBR 20XKC065-50	
	25A			7MBR 25XKC120-50
	30A	7MBR 30VKC-060-50	7MBR 30XKC065-50	
19	15A			7MBR 15VKD-120-50
	25A			7MBR 25VKD-120-50
	35A			7MBR 35VKD-120-50
	50A	7MBR 50VKD-060-50	7MBR 50XKD065-50	

PIM and 6-PACK IGBTs with V-Series IGBT (MiniSKiiP® compatible)

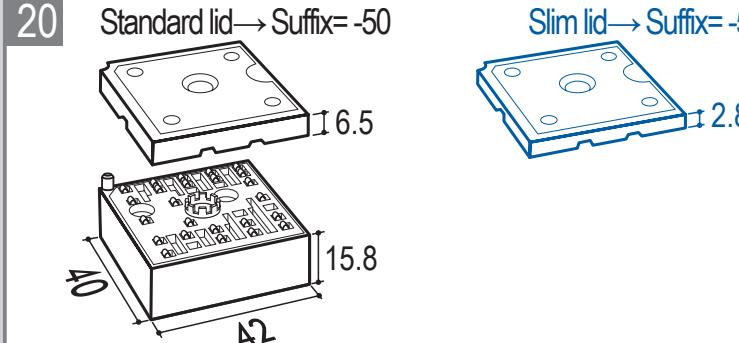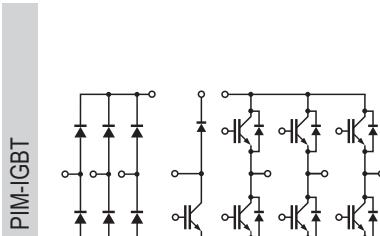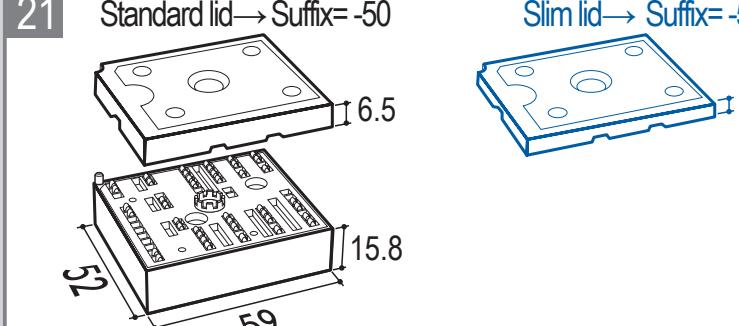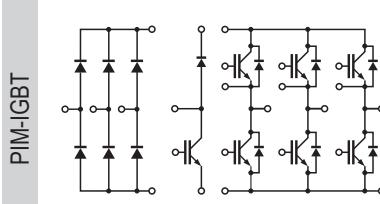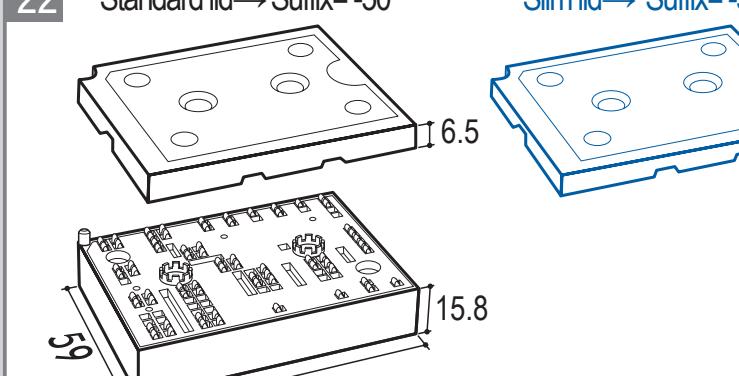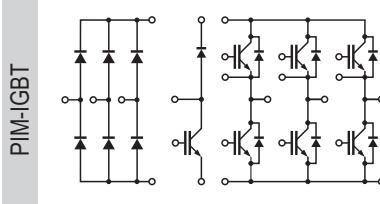			I_C	1200V V-Series 6th Generation
20	MiniSKiiP® 1	 <p>Standard lid → Suffix= -50 Slim lid → Suffix= -53</p> <p>6.5 15.8</p> <p>42</p>		
			8A	7MBR 8VJA-120-50 7MBR 8VJA-120-53
			15A	7MBR 15VJA-120-50 7MBR 15VJA-120-53
21	MiniSKiiP® 2	 <p>Standard lid → Suffix= -50 Slim lid → Suffix= -53</p> <p>6.5 15.8</p> <p>59</p>		
			25A	7MBR 25VJB-120-50 7MBR 25VJB-120-53
			35A	7MBR 35VJB-120-50 7MBR 35VJB-120-53 7MBR 35VJB-120A-50 With larger rectifier diodes 7MBR 35VJB-120A-53 With larger rectifier diodes
22	MiniSKiiP® 3	 <p>Standard lid → Suffix= -50 Slim lid → Suffix= -53</p> <p>6.5 15.8</p> <p>82</p>		
			50A	7MBR 50VJC-120-50 7MBR 50VJC-120-53
			75A	7MBR 75VJC-120-50 7MBR 75VJC-120-53
			100A	7MBR 100VJC-120-50 7MBR 100VJC-120-53
			100A	6MBi 100VJC-120-50* 6MBi 100VJC-120-53*
			150A	6MBi 150VJC-120-50* 6MBi 150VJC-120-53* 6MBi 150VJC-120-55* With SiN-DCB

MiniSKiiP® is a trademark of SEMIKRON Elektronik GmbH & Co. KG - Germany



* Under development

PIM IGBTs (Power Integrated Modules) with Solder Pins







With Solder Pins	I_C	600V	650V	1200V
		V-Series 6th Generation	X-Series 7th Generation	V-Series 6th Generation
23	25A			7MBR 25VA-120-50
	35A			7MBR 35VA-120-50
	50A	7MBR 50VA-060-50		
24	35A			7MBR 35VB-120-50
	50A			7MBR 50VB-120-50
	75A	7MBR 75VB-060-50		7MBR 75VB-120-50
	100A	7MBR 100VB-060-50		
25	25A			7MBR 25VM-120-50
	35A			7MBR 35VM-120-50
	50A		7MBR 50XMA065-50	7MBR 50VM-120-50
	75A		7MBR 75XMA065-50	7MBR 75XME120-50
26	25A			7MBR 25VP-120-50
	35A			7MBR 35VP-120-50
	50A	7MBR 50VP-060-50	7MBR 50XPA065-50	7MBR 50VP-120-50
	75A	7MBR 75VP-060-50	7MBR 75XPA065-50	7MBR 75XPE120-50
	100A	7MBR 100VP-060-50	7MBR 100XPE065-50	
27	50A			7MBR 50VN-120-50
	75A		7MBR 75XNA065-50	7MBR 75VN-120-50
	100A		7MBR 100XNA065-50	7MBR 100VN-120-50
	150A		7MBR 150XNA065-50	7MBR 150VN-120-50
28	50A			7MBR 50VR -120-50
	75A			7MBR 75VR -120-50
	100A	7MBR 100VR-060-50	7MBR 100XRA065-50	7MBR 100VR-120-50
	150A	7MBR 150VR-060-50	7MBR 150XRA065-50	7MBR 150VR-120-50

PIM IGBTs (Power Integrated Modules) with PressFit Contacts





With PressFit Contacts

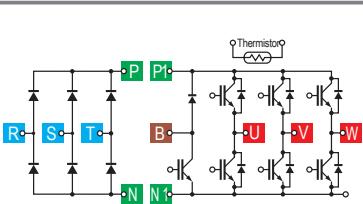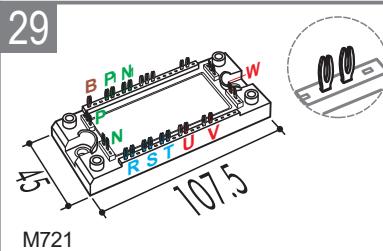

I_C	600V V-Series 6th Generation	650V X-Series 7th Generation	1200V V-Series 6th Generation	1200V X-Series 7th Generation
25A		7MBR 50XWA065-50	7MBR 25WW-120-50	
35A			7MBR 35WW-120-50	7MBR 35XWA120-50
50A			7MBR 50WW-120-50	7MBR 50XWA120-50
75A		7MBR 75XWA065-50		7MBR 75XWE120-50
50A			7MBR 50VX-120-50	
75A		7MBR 75XXA065-50	7MBR 75VX-120-50	7MBR 75XXA120-50
100A		7MBR 100XXA065-50	7MBR 100VX-120-50	7MBR 100XXA120-50
150A		7MBR 150XXA065-50	7MBR 150VX-120-50	7MBR 150XXE120-50
25A			7MBR 25VY-120-50	
35A			7MBR 35VY-120-50	7MBR 35XYA120-50
50A	7MBR 50VY-060-50	7MBR 50XYA065-50	7MBR 50VY-120-50	7MBR 50XYA120-50
75A	7MBR 75VY-060-50	7MBR 75XYA065-50		7MBR 75XYE120-50
100A	7MBR 100VY-060-50	7MBR 100XYE065-50		
50A			7MBR 50VZ-120-50	
75A			7MBR 75VZ-120-50	7MBR 75XZA120-50
100A	7MBR 100VZ-060-50	7MBR 100XZA065-50	7MBR 100VZ-120-50	7MBR 100XZA120-50
150A	7MBR 150VZ-060-50	7MBR 150XZA065-50	7MBR 150VZ-120-50	7MBR 150XZE120-50

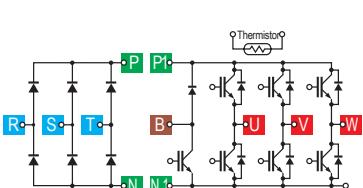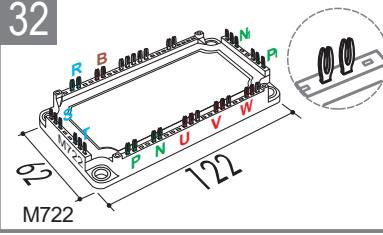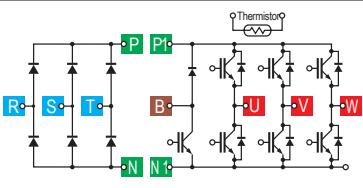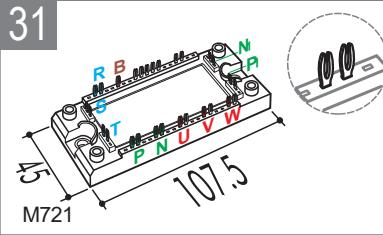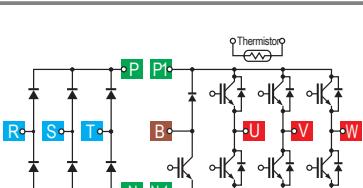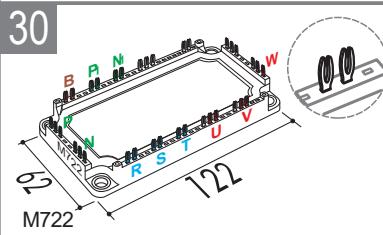

6-Pack IGBTs

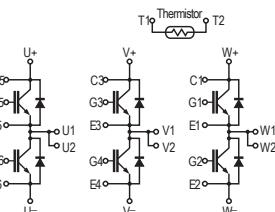	I_C	600V V-Series 6th Generation	1200V V-Series 6th Generation	X-Series 7th Generation	1700V V-Series 6th Generation	
With Solder Pins	33		50A 6MBi 50VA-060-50	6MBi 50VA-120-50		
	75A 6MBi 75VA-060-50	6MBi 75VA-120-50				
	100A 6MBi 100VA-060-50	6MBi 100VA-120-50				
	100A 150A 180A 200A		6MBi 100VB-120-50 6MBi 150VB-060-50 6MBi 180VB-120-50 6MBi 180VB-120-55 Equivalent to 200A by lower $R_{th(j-c)}$	6MBi 100XBA120-50 6MBi 150XBA120-50 6MBi 180VB-120-50 6MBi 200XBA120-50 6MBi 200XBE120-50		
With PressFit Contacts	35		50A 6MBi 50WW-060-50	6MBi 50WW-120-50		
	75A 6MBi 75WW-060-50	6MBi 75WW-120-50				
	100A 6MBi 100WW-060-50	6MBi 100WW-120-50				
High Power	36		100A 150A 180A 200A	6MBi 100VX-120-50 6MBi 150VX-060-50 6MBi 180VX-120-50 6MBi 180VX-120-55 Equivalent to 200A by lower $R_{th(j-c)}$	6MBi 100XXA120-50 6MBi 150XXA120-50 6MBi 200XXA120-50 6MBi 200XXE120-50	6MBi 100VX-170-50
	225A 6MBi 225V-120-50					
	300A 6MBi 300V-120-50				6MBi 300V-170-50	
	450A 6MBi 450V-120-50				6MBi 450V-170-50	
	550A 6MBi 550V-120-50				6MBi 550V-170-50	
						
						

2-Pack IGBT-Modules with Spring, Pin & PressFit Contacts







	I _C	1200V			1700	
		V-Series 6th Generation	V-Series 6th Generation With SiN-substrate 20% Lower thermal impedance	X-Series 7th Generation	V-Series 6th Generation	X-Series 7th Generation
Spring Contacts	225A	2MBi 225VJ-120-50				
	300A	2MBi 300VJ-120-50				
	450A	2MBi 450VJ-120-50				
	550A				2MBi 550VJ-170-50	
	600A		2MBi 600VJ-120-50			
Solder Pins	225A	2MBi 225VN-120-50	2MBi 225VN-120S-50	2MBi 225XNA120-50 *		2MBi 225XNA170-50 *
	300A	2MBi 300VN-120-50	2MBi 300VN-120S-50	2MBi 300XNA120-50 *	2MBi 300VN-170-50	2MBi 300XNA170-50 *
	450A	2MBi 450VN-120-50	2MBi 450VN-120S-50	2MBi 450XNA120-50 *	2MBi 450VN-170-50	2MBi 450XNA170-50 *
	550A				2MBi 550VN-170-50	
	600A		2MBi 600VN-120-50	2MBi 600XNE120-50		2MBi 600XNE170-50 *
	800A			2MBi 800XNE120-50		
PressFit Contacts	225A	2MBi 225VX-120-50		2MBi 225XNB120-50 *	2MBi 225VX-170-50	2MBi 225XNB170-50 *
	300A	2MBi 300VX-120-50		2MBi 300XNB120-50 *	2MBi 300VX-170-50	2MBi 300XNB170-50 *
	450A	2MBi 450VX-120-50		2MBi 450XNB120-50 *	2MBi 450VX-170-50	2MBi 450XNB170-50 *
	550A				2MBi 550VX-170-50	
	600A		2MBi 600VX-120-50	2MBi 600XNF120-50 *		2MBi 600XNF170-50 *
	800A			2MBi 800XNF120-50 *		

* Under development

		600V	650V X series 7G	1200V X series 7G		1700V X series 7G		
Standard1 & 2-Pack		I _C	V-Series 6th Generation	X-Series 7th Generation	V-Series 6th Generation	X-Series 7th Generation	V-Series 6th Generation	X-Series 7th Generation
2-Pack	41	75A			2MBi 75VA-120-50		2MBi 75VA-170-50	2MBi 75XAA170-50*
		100A	2MBi 100VA-060-50		2MBi 100VA-120-50	2MBi 100XAA120-50*	2MBi 100VA-170-50	2MBi 100XAA170-50*
		150A	2MBi 150VA-060-50	2MBi 150XAA065-50*	2MBi 150VA-120-50	2MBi 150XAA120-50*		2MBi 150XAA170-50*
		200A	2MBi 200VA-060-50	2MBi 200XAA065-50*		2MBi 200XAA120-50*		
	42	150A			2MBi 150VB-120-50			
		200A			2MBi 200VB-120-50	2MBi 200XBE120-50*		
2-Pack	43	300A			2MBi 300VD-120-50			
		400A	2MBi 400VD-060-50	2MBi 400XDE065-50*	2MBi 400VD-120-50	2MBi 400XDE120-50*		
		600A	2MBi 600VD-060-50	2MBi 600XDE065-50*		2MBi 600XDE120-50*		
	44	150A					2MBi 150VH-170-50	2MBi 150XHA170-50*
		200A			2MBi 200VH-120-50		2MBi 200VH-170-50	2MBi 200XHA170-50*
		300A			2MBi 300VH-120-50	2MBi 300XHA120-50	2MBi 300VH-170-50	2MBi 300XHA170-50*
1-Pack	45	400A						2MBi 400XHA170-50*
		450A			2MBi 450VH-120-50	2MBi 450XHA120-50		
		600A				2MBi 600XHA120-50		
	46	300A			2MBi 300VE-120-50		2MBi 300VE-170-50	2MBi 300XEE170-50*
		400A					2MBi 400VE-170-50	2MBi 400XEE170-50*
		600A	2MBi 600VE-060-50	2MBi 600XEE065-50*	2MBi 600VE-120-50	2MBi 600XEE120-50*		

* Under development


High Power Modules 1 & 2 Pack

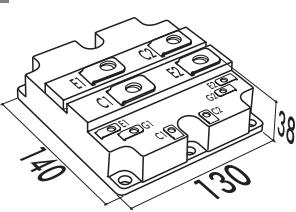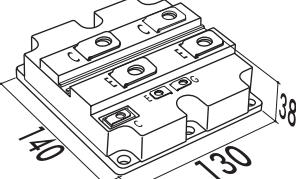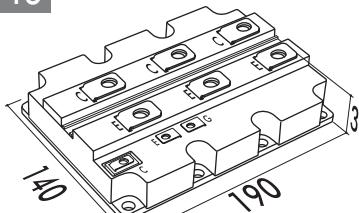	I_C	1200V	1700V	3300V
2-Pack		V-Series 6th Generation With Cu-baseplate Soft turn-off	V-Series 6th Generation With Cu-baseplate Low switching loss	V-Series 6th Generation With AlSiC-baseplate Low switching loss
47		600A 2MBi 600VG-120P	2MBi 600VG-170E	2MBi 600VT-170E
		800A 2MBi 800VG-120P	2MBi 800VG-170E	2MBi 800VT-170E
		1200A 2MBi 1200VG-120P	2MBi 1200VG-170E	2MBi 1200VT-170E
48		800A		1MBi 800UG-330
		1000A		1MBi 1000UG-330
		1200A 1MBi 1200VC-120P	1MBi 1200VC-170E	1MBi 1200VR-170E
		1600A 1MBi 1600VC-120P	1MBi 1600VC-170E	1MBi 1600VR-170E
		2400A 1MBi 2400VC-120P	1MBi 2400VC-170E	1MBi 2400VR-170E
49		1200A		1MBi 1200UE-330
		1500A		1MBi 1500UE-330
		2400A 1MBi 2400VD-120P	1MBi 2400VD-170E	1MBi 2400VS-170E
		3600A 1MBi 3600VD-120P	1MBi 3600VD-170E	1MBi 3600VS-170E

High Power next Core (HPnC)

	I_C	1700V X-Series 7th Generation	3300V X-Series 7th Generation
All Silicon Modules Si-IGBT & Si-Diode	450A	2MBi 450XUF330-50*	2MBi 450XUF330-50*
	1000A		
Hybrid Modules Si-IGBT & SiC Diode	450A	2MSi 450XUF330-50*	2MSi 450XUF330-50*
	1000A		

All Silicon Modules
Si-IGBT (X-Series, 7th Generation)
Si-Diode

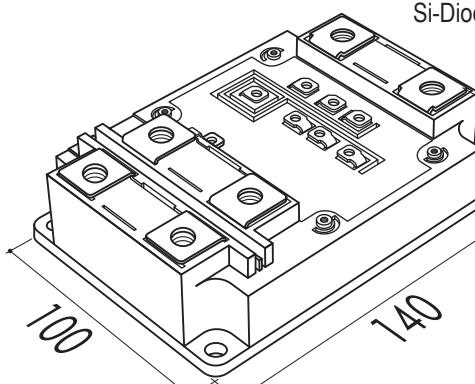

Hybrid Modules
Si-IGBT (X-Series, 7th generation)
SiC-Schottky Diode



Wiring diagram for the module, showing the connection between the Si-IGBT and Si-Diode components.

* Under development

High Power Modules, 2-Pack & Chopper

		1200V		1700V	
		V-Series 6th Generation E-type (Low switching loss) P-type (Soft turn-off)	X-Series 7th Generation E-type (Low switching loss) P-type (Soft turn-off)	V-Series 6th Generation E-type (Low switching loss) P-type (Soft turn-off)	X-Series 7th Generation E-type (Low switching loss) P-type (Soft turn-off)
51	2-Pack	I _C			
		600A	2MBi 600VXA-120E-50		
		650A			2MBi 650VXA-170E-50 2MBi 650VXA-170EA-50 (With larger free wheeling diode)
		900A	2MBi 900VXA-120E-50 2MBi 900VXA-120P-50	2MBi 900XXA120E-50 * 2MBi 900XXA120P -50 *	
		1200A		2MBi 1200XXE120E-50 * 2MBi 1200XXE120P -50 *	2MBi 1200XXE170P-50*
		650A			1MBi 650VXA-170EL-50
52	2-Pack	M271	900A	1MBi 900VXA-120PD-50	1MBi 650VXA-170EH-50
			650A		
			900A	1MBi 900VXA-120PC-50	
			1000A		2MBi 1000VXB-170E-50 2MBi 1000VXB-170EA-50 (With larger free wheeling diode)
			1400A	2MBi 1400VXB-120E-50 2MBi 1400VXB-120P-50	2MBi 1400VXB-170E-50 2MBi 1400VXB-170P-50
			1800A		2MBi 1800XXF120P -50 * 2MBi 1800XXF170P -50 *
M272	Chopper	89	1000A		1MBi 1000VXB-170EL-50
		250	1400A	1MBi 1400VXB-120PL-50	1MBi 1400VXB-170EL-50
			1000A		1MBi 1000VXB-170EH-50
			1400A	1MBi 1400VXB-120PH-50	1MBi 1400VXB-170EH-50

Above devices are available with V_{Cset} & V_F rank label for optimum paralleling (→suffix -54 instead of -50)

* Under development



IPM IGBTs (Intelligent Power Modules)

	Without Brake-Chopper	53	With High Voltage Driver-IC	Built-in protection functions				I _C	600V	1200V
				Fault status output (Alarm)	Under voltage protection (self shutdown)	Short circuit protection (self shutdown)	Overheating protection (self shutdown)			
Without Brake-Chopper	P633, P633A	53		15A				6MBP 15XSD060-50		
				20A				6MBP 20XSD060-50		
				30A				6MBP 30XSD060-50		
				35A				6MBP 35XSD060-50		
				15A				6MBP 15XSF060-50		
				20A				6MBP 20XSF060-50		
				30A				6MBP 30XSF060-50		
Without Brake-Chopper	P629	54		10A					6MBP 10VAA-120-50	
				15A					6MBP 15VAA-120-50	
				20A	6MBP 20VAA-060-50					6MBP 25VAA-120-50
				25A						
				30A	6MBP 30VAA-060-50					
				50A	6MBP 50VAA-060-50					
Without Brake-Chopper	P626	55		25A					6MBP 25VBA-120-50	
				35A					6MBP 35VBA-120-50	
				50A	6MBP 50VBA-060-50				6MBP 50VBA-120-50	
				75A	6MBP 75VBA-060-50					

IPM IGBTs (Intelligent Power Modules)

	I _C	Built-in protection functions	
		Fault status output (Alarm) Under voltage protection (self shutdown) Short circuit protection (self shutdown) Overheating protection (self shutdown) Temperature sensor function ($V_{temp,out}$)	
Without Brake-Chopper	25A		6MBP 25VFN-120-50
	35A		6MBP 35VFN-120-50
	50A	6MBP 50VFN-060-50	6MBP 50VFN-120-50
	75A	6MBP 75VFN-060-50	
	100A	6MBP 100VFN-060-50	
With Brake-Chopper	25A		7MBP 25VFN-120-50
P636	35A		7MBP 35VFN-120-50
	50A	7MBP 50VFN-060-50	7MBP 50VFN-120-50
	75A	7MBP 75VFN-060-50	
	100A	7MBP 100VFN-060-50	

56 I_C- & T_j- Sensors on chip

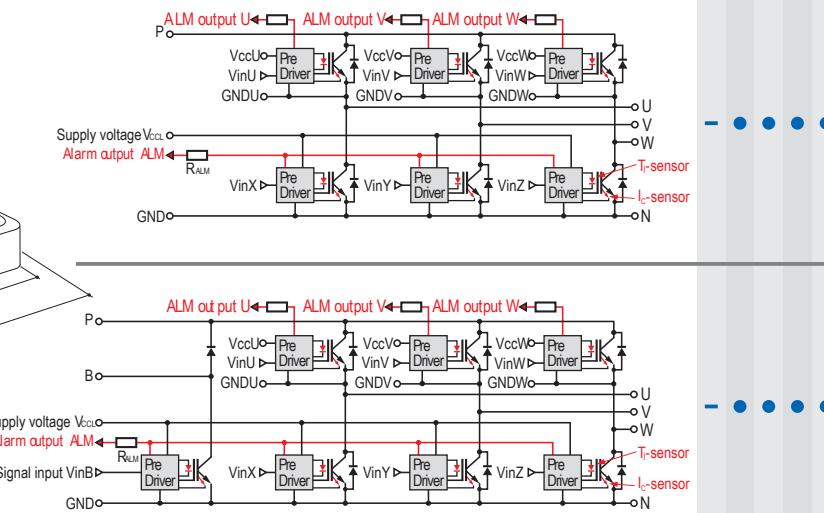
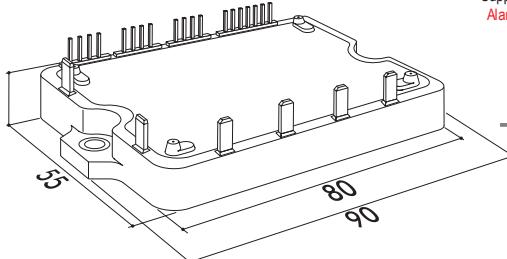


IPM IGBTs (Intelligent Power Modules)


57

 I_c - & T_j - Sensors on chip

Without Brake-Chopper

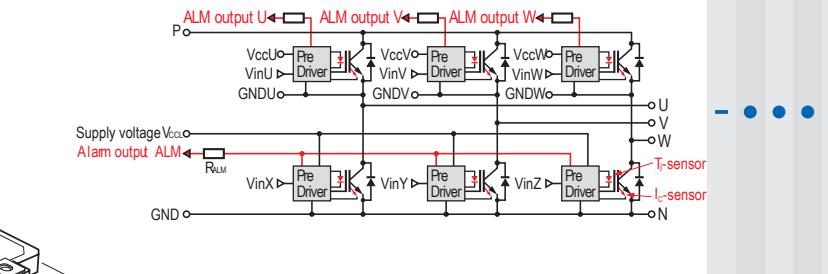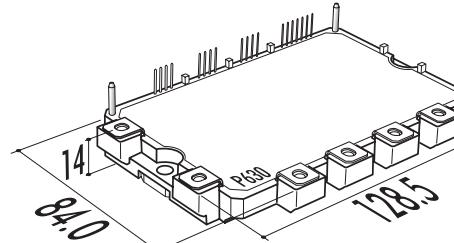

With Brake-Chopper

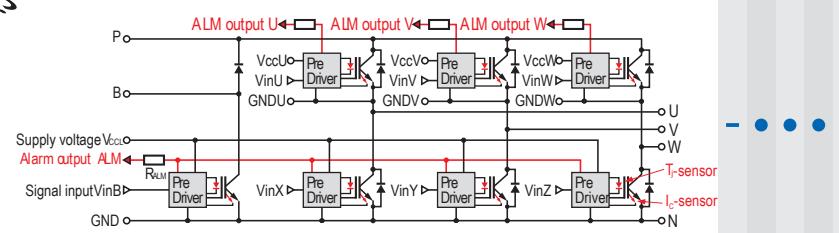


P630


58

 I_c - & T_j - Sensors on chip

Without Brake-Chopper

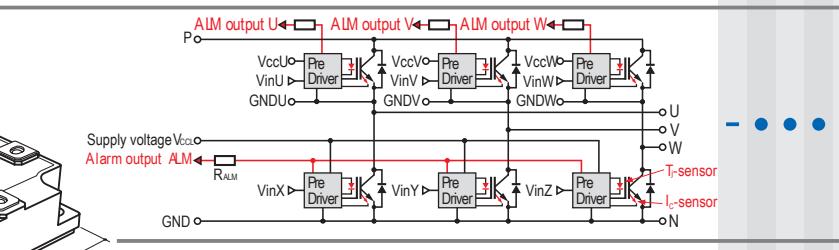

With Brake-Chopper

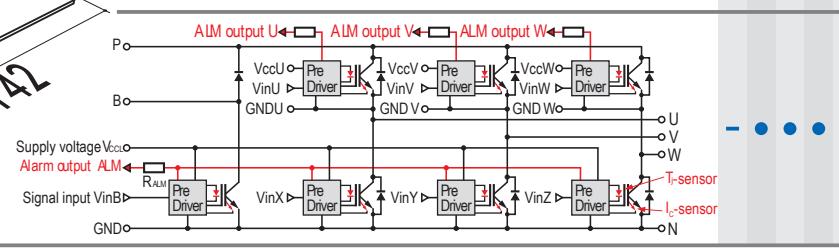

P631



Built-in protection functions

- Fault status output (Alarm)
- Under voltage protection (self shutdown)
- Short circuit protection (self shutdown)
- Overheating protection (self shutdown)
- Temperature sensor function ($V_{temp,out}$)


I_C	600V V-Series 6th Generation	1200V V-Series 6th Generation
25A		6MBP 25VDA-120-50
35A		6MBP 35VDA-120-50
50A	6MBP 50VDA-060-50	6MBP 50VDA-120-50 6MBP 50VDN-120-50 ¹⁾
75A	6MBP 75VDA-060-50	6MBP 75VDA-120-50 6MBP 75VDN-120-50 ¹⁾
100A	6MBP 100VDA-060-50 6MBP 100VDN-060-50 ¹⁾	6MBP 100VDA-120-50 6MBP 100VDN-120-50 ¹⁾
150A	6MBP 150VDA-060-50 6MBP 150VDN-060-50 ¹⁾	
200A	6MBP 200VDA-060-50 6MBP 200VDN-060-50 ¹⁾	
25A		7MBP 25VDA-120-50
35A		7MBP 35VDA-120-50
50A	7MBP 50VDA-060-50	7MBP 50VDA-120-50 7MBP 50VDN-120-50 ¹⁾
75A	7MBP 75VDA-060-50	7MBP 75VDA-120-50 7MBP 75VDN-120-50 ¹⁾
100A	7MBP 100VDA-060-50 7MBP 100VDN-060-50 ¹⁾	7MBP 100VDA-120-50 7MBP 100VDN-120-50 ¹⁾
150A	7MBP 150VDA-060-50 7MBP 150VDN-060-50 ¹⁾	
200A	7MBP 200VDA-060-50 7MBP 200VDN-060-50 ¹⁾	
100A		6MBP 100VEA-120-50
150A		6MBP 150VEA-120-50
200A	6MBP 200VEA-060-50	6MBP 200VEA-120-50
300A	6MBP 300VEA-060-50	
400A	6MBP 400VEA-060-50	
100A		7MBP 100VEA-120-50
150A		7MBP 150VEA-120-50
200A	7MBP 200VEA-060-50	7MBP 200VEA-120-50
300A	7MBP 300VEA-060-50	
400A	7MBP 400VEA-060-50	

1) With high thermal performance

Chopper(Standard and high speed IGBTs)


Chopper		I_C	1200V		
			Planar-NPT High Speed-Series	U-Series 5th Generation	V-Series 6th Generation
59	 M262	50A		1MBi 50U4F-120L-50	
		75A		1MBi 75U4F-120L-50	
		100A		1MBi 100U4F-120L-50	
		150A			1MBi 150VA-120L-50
		200A			1MBi 200VA-120L-50
60	 M259	200A	1MBi 200HH-120L-50	1MBi 200U4H-120L-50 Without thermistor	
		300A	1MBi 300HH-120L-50		
		400A	1MBi 400HH-120L-50		

High Speed IGBTs

2-Pack		I_C	1200V		
			Planar-NPT High Speed-Series		
61		100A	2MBi 100HJ-120-50		
		150A	2MBi 150HJ-120-50		
		200A	2MBi 200HJ-120-50		
		300A	2MBi 300HJ-120-50		

Discrete IGBTs

62

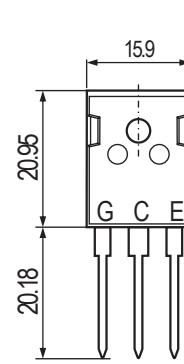

Without free wheeling diode

V-Series, 6th Generation
Low loss, ~10kHzI_C 600V 1200V15A
25A
30A
35A
40A
50A
60A
75AFGW 15N 120H
FGW 30N 120H
FGW 35N 60H
FGW 40N 120H
FGW 50N 60H
FGW 75N 60H
FGW 15N 120VD
FGW 25N 120VD
FGW 30N 60VD
FGW 35N 60HD
FGW 40N 120VD
FGW 50N 60VD
FGW 75N 60HDV-Series, 6th Generation
High speed, 10~30kHzI_C 600V 1200V

FGW 35N 60H

FGW 40N 120H

FGW 50N 60H

FGW 75N 60H

FGW 15N 120HD

FGW 30N 120HD

FGW 35N 60HD

FGW 35N 60HC¹⁾

FGW 40N 120HD

FGW 50N 60HD

FGW 50N 60HC¹⁾

FGW 75N 60HD

FGW 75N 60HC¹⁾W-Series, 6th Generation
Ultra high speed, 20~100kHzI_C 650V 1200V

FGW 25N 120W

FGW 40N 65W

FGW 50N 65W

FGW 60N 65W

FGW 25N 120WD
FGW 25N 120WE

FGW 40N 65WD

FGW 40N 65WE

FGW 50N 65WD

FGW 50N 65WE

FGW 60N 65WD

FGW 60N 65WE


FGW 75N 65WD

FGW 75N 65WE

TO -247

63

IGBT with Kelvin connection

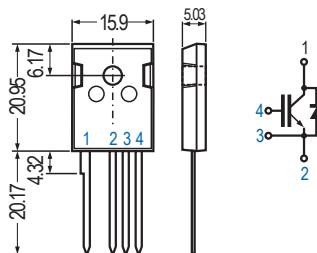W-Series, 6th Generation
Ultra high speed, 20~100kHzI_C 650V 1200V40A FGZ 40N 120WE¹⁾
50A FGZ 50N 65WD
FGZ 50N 65WE¹⁾
75A FGZ 75N 65WE¹⁾


TO -247-4

64


Reverse Blocking IGBT

I_C

600V

¹⁾ With full rating free wheeling diode

Super - Junction MOSFET

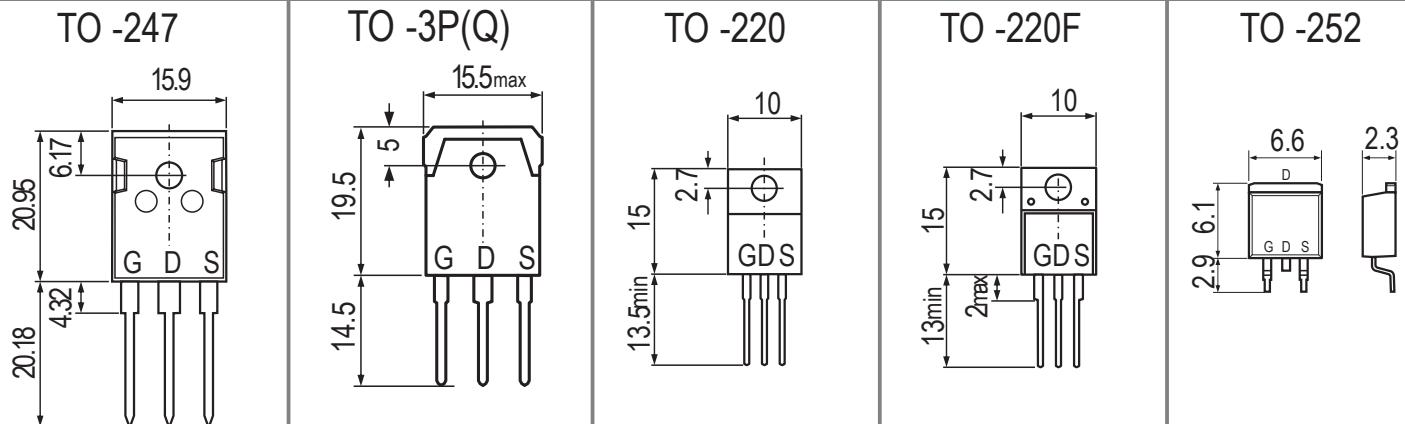

V_{DS}	$R_{DS(on)}$, max	I_D	TO-247	TO-3P(Q)	TO-220	TO-220F	TO-252
600V	25.4 mW	95.5 A	FM W 60N 025 S2				
	40.0 mW	66.2 A	FM W 60N 040 S2				
	55.0 mW	50.3 A	FM W 60N 055 S2				
	70.0 mW	39.4 A	FM W 60N 070 S2				FM V 60N 070 S2
	79.0 mW	37.1 A	FM W 60N 079 S2			FM P 60N 079 S2	FM V 60N 079 S2
	88.0 mW	32.8 A	FM W 60N 088 S2			FM P 60N 088 S2	FM V 60N 088 S2
	99.0 mW	29.2 A	FM W 60N 099 S2			FM P 60N 099 S2	FM V 60N 099 S2
	125.0 mW	23.4 A	FM W 60N 125 S2			FM P 60N 125 S2	FM V 60N 125 S2
	160.0 mW	18.4 A	FM W 60N 160 S2			FM P 60N 160 S2	FM V 60N 160 S2
	190.0 mW	15.5 A	FM W 60N 190 S2	FM H 60N 190 S2		FM P 60N 190 S2	FM V 60N 190 S2
	280.0 mW	10.7 A		FM H 60N 280 S2		FM P 60N 280 S2	FM D 60N 280 S2
	380.0 mW	8.1 A				FM P 60N 380 S2	FM D 60N 380 S2
	With built-in FRED	27.0 mW	95.5 A	FM W 60N 027 S2 FD			
		43.0 mW	66.2 A	FM W 60N 043 S2 FD			
		59.0 mW	50.3 A	FM W 60N 059 S2 FD			
		75.0 mW	39.4 A	FM W 60N 075 S2 FD			FM V 60N 075 S2 FD
		84.0 mW	37.1 A	FM W 60N 084 S2 FD		FM P 60N 084 S2 FD	FM V 60N 084 S2 FD
		94.0 mW	32.8 A	FM W 60N 094 S2 FD		FM P 60N 094 S2 FD	FM V 60N 094 S2 FD
		105.0 mW	29.2 A	FM W 60N 105 S2 FD		FM P 60N 105 S2 FD	FM V 60N 105 S2 FD
		133.0 mW	23.4 A	FM W 60N 133 S2 FD		FM P 60N 133 S2 FD	FM V 60N 133 S2 FD
		170.0 mW	18.4 A	FM W 60N 170 S2 FD		FM P 60N 170 S2 FD	FM V 60N 170 S2 FD

* Under development

SiC Schottky Barrier Diodes ↪

TO -220		TO -220F (insulated)		TO -247		T-Pack S		
I _{FAV}	Single	Dual	Single	Dual	Single	Dual	Single	Dual
650V	10A FDCP 10S 65		FDCA 10S 65		FDCY 10S 65		FDCC 10S 65	
	20A FDCP 20C 65		FDCA 20C 65		FDCY 20C 65		FDCC 20C 65	
	25A FDCP 25S 65		FDCA 25S 65		FDCY 25S 65		FDCC 25S 65	
	50A FDCP 50S 65		FDCA 50S 65		FDCY 50C 65		FDCC 50C 65	
1200V	18A FDCP 18S 120		FDCA 18S 120		FDCY 18S 120		FDCY 36C 120	
	36A FDCP 36C 120							

Fuji Electric Corp of America (FEA) Semiconductor Sales Network

FEA Sales Offices	Edison, NJ (HQ) 732-952-8146 xfea-semi-group@fujielectric.com	Dallas, TX 732-600-6309 lfick@fujielectric.com	Ithaca, NY 607-266-9494 jusack@fujielectric.com	Milwaukee, WI 262-547-0185 ttwitchell@fujielectric.com	Discrete Parts 214-675-6532 cmerz@fujielectric.com
--------------------------	--	---	--	---	---

FEA Sales Representatives- United States and Territories

Alabama Cartwright & Bean 770-416-6075 sales@cartbean.com www.cart-bean.com	Alaska FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Arizona FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Arkansas Centramark 972-414-8188 insidesales@cmatex.com www.cmatex.com	California- North of San Luis Obispo MicroElec Technical 408-282-3508 sales@microecls.com www.microecls.com	California- San Luis Obispo and South S.A. Larson & Associates 626-793-4411 sales@salarson.com www.salarson.com	Colorado FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Connecticut Conti-Younger Associates 860-668-7956 sales@conti-younger.com www.conti-younger.com	Delaware GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com
District of Columbia GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com	Florida Moats Yates & Associates 305-733-4941 cmoats777@aol.com www.moatsyates.com	Georgia Cartwright & Bean 770-416-6075 sales@cartbean.com www.cart-bean.com	Hawaii MicroElec Technical 408-282-3508 sales@microecls.com www.microecls.com	Idaho FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Illinois FEA 262-547-0185 ttwitchell@fujielectric.com americas.fujielectric.com	Indiana Palladium Tech 317-487-9303 jim@junctiontech.com www.palladiumtech.com	Iowa FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Kansas FEA 262-547-0185 ttwitchell@fujielectric.com americas.fujielectric.com
Kentucky Palladium Tech 937-339-4750 gskipper@palladiumtech.com www.palladiumtech.com	Louisiana Centramark 972-414-8188 insidesales@cmatex.com www.cmatex.com	Maine Conti-Younger Associates 508-485-7204 sales@conti-younger.com www.conti-younger.com	Maryland GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com	Massachusetts Conti-Younger Associates 508-485-7204 sales@conti-younger.com www.conti-younger.com	Michigan Palladium Tech 810-695-0665 intercomm.carl@yahoo.com www.palladiumtech.com	Minnesota RCOM 763-557-2801 warrent@rcominc.com www.rcominc.com	Mississippi Cartwright & Bean 770-416-6075 sales@cartbean.com www.cart-bean.com	Missouri FEA 262-547-0185 ttwitchell@fujielectric.com americas.fujielectric.com
Montana FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Nebraska FEA 262-547-0185 ttwitchell@fujielectric.com americas.fujielectric.com	Nevada MicroElec Technical 408-282-3508 sales@microecls.com www.microecls.com	New Hampshire Conti-Younger Associates 508-485-7204 sales@conti-younger.com www.conti-younger.com	New Jersey GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com	New Mexico FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	New York- Greater NYC GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com	New York- Upstate ICS Solutions 315-374-2731 tlongo@ics-solutions.org americas.fujielectric.com	North Carolina Cartwright & Bean 770-416-6075 sales@cartbean.com www.cart-bean.com
North Dakota RCOM 763-557-2801 warrent@rcominc.com www.rcominc.com	Ohio Palladium Tech 937-339-4750 gskipper@palladiumtech.com www.palladiumtech.com	Oklahoma Centramark 972-414-8188 insidesales@cmatex.com www.cmatex.com	Oregon FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Pennsylvania- Eastern GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com	Pennsylvania- Western RK Miller & Associates 724-612-6123 rmiller@rkmallc.com	Puerto Rico FEA 607-266-9494 jusack@fujielectric.com americas.fujielectric.com	Rhode Island Conti-Younger Associates 860-668-7956 sales@conti-younger.com www.conti-younger.com	South Carolina Cartwright & Bean 770-416-6075 sales@cartbean.com www.cart-bean.com
South Dakota RCOM 763-557-2801 warrent@rcominc.com www.rcominc.com	Tennessee Cartwright & Bean 770-416-6075 sales@cartbean.com www.cart-bean.com	Texas Centramark 972-414-8188 insidesales@cmatex.com www.cmatex.com	Utah FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	Vermont Conti-Younger Associates 508-485-7204 sales@conti-younger.com www.conti-younger.com	Virgin Islands FEA 607-266-9494 jusack@fujielectric.com americas.fujielectric.com	Virginia GSA Sales 215-335-4600 cfranklin@gsarepsales.com www.gsatech.com	Washington FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com	West Virginia RK Miller & Associates 724-612-6123 rmiller@rkmallc.com
Wisconsin RCOM 763-557-2801 warrent@rcominc.com www.rcominc.com	Wyoming FEA 732-600-6309 lfick@fujielectric.com americas.fujielectric.com							

FEA Sales Representatives

Canada Sigma Component Design 905-696-8800 sales@sigmacomponent.com www.sigmacomponent.com	Mexico FEA 607-266-9494 jusack@fujielectric.com americas.fujielectric.com	Central America FEA 607-266-9494 jusack@fujielectric.com americas.fujielectric.com	South America FEA 607-266-9494 jusack@fujielectric.com americas.fujielectric.com
---	--	---	---

FEA Distributors

Brazil Distributor Richardson Electronics do Brasil +55 11 5186 9663 enio@rell.com www.rell.com	Brazil Distributor TCT- Terceirizaacao Com e Technol em Semiconds. LTDA 011+55-11-5545-9400 vendas@tctbrasil.com.br www.tctbrasil.com.br	North America Richardson Electronics	North & South America excluding Brazil New Advantage Corporation	North America Discrete Parts Allied Electronics
			630-208-2200 sales@rell.com www.rell.com	727-828-0187 sales@nacsemi.com nacsemi.com



Fuji Electric Corp of America
50 Northfield Avenue
Edison, NJ 08837
Tel: +1 732-952-8146
email: xfea-semi-group@fujielectric.com
americas.fujielectric.com



Fuji Electric Corp. of America

50 Northfield Avenue
Edison, NJ 08837 USA

Tel: 732-560-9410
www.americas.fujielectric.com

Power Semiconductors Group

<https://americas.fujielectric.com/products/semiconductors/>

Fuji Electric Hong Kong Co., Limited
Unit 227-230, 2nd Floor, No.1 Science Park West Avenue,
Hong Kong Science Park, Shatin, N.T., Hong Kong.
Tel: +852-2664-8699

Fuji Electric Taiwan Co., Ltd.
F9-1 , No. 111 , Sung Chiang Road, Taipei, TAIWAN
Tel: +886-2-2515-1850

Fuji Electric Asia Pacific Private Ltd.
171 Chin Swee Road,#12-01 ,San Centre,SINGAPORE 169877
Tel: +65-6533-0014

Fuji Electric (China) Co., Ltd
F27, International Corporate City, NO.3000 Zhongshan North Road,
Shanghai 200063 P.R.C., CHINA
Tel: +86-21-5496-1177

Fuji Electric India Private Ltd.
409 &410, Meadows, Sahar Plaza, J.B. Nagar, Andheri-Kurla Road,
Andheri(East), Mumbai - 400 059, India
Tel: +91-22-4010-4870

Fuji Electric Europe GmbH
Goethering 58, 63067 Offenbach, am Main, F.R. GERMANY
Tel: +49-69-6690290

Information in this catalog is subject to change without notice.

Fuji, fujitsu, Минск +375447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты
email minsk17@tut.by tel.+375 29 758 47 80 мтс

каталог, описание, технические, характеристики, datasheet, параметры,
маркировка, габариты, фото, модуль, Fuji, fujitsu, реле

КАТАЛОГ

модуль , igbt, мост диодный, реле

купить, продажа

ЭЛЕКТРОННЫЕ КОМПОНЕНТЫ

Мы не работаем с частными (физическими) лицами. Мы работаем только с юридическими лицами (организациями) и ИП и только по безналичному расчёту.

[где и как купить в Минске?](#)

