



г.Минск [www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by)  
email [minsk17@tut.by](mailto:minsk17@tut.by) тел.+375447584780

**TURCK**  
*works*

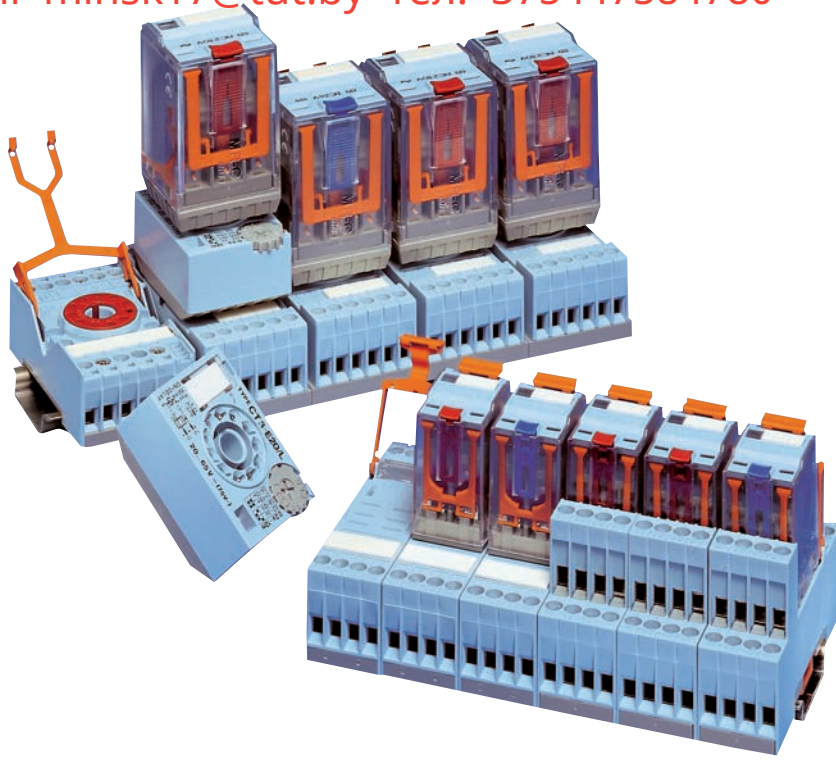

**RELAYS**

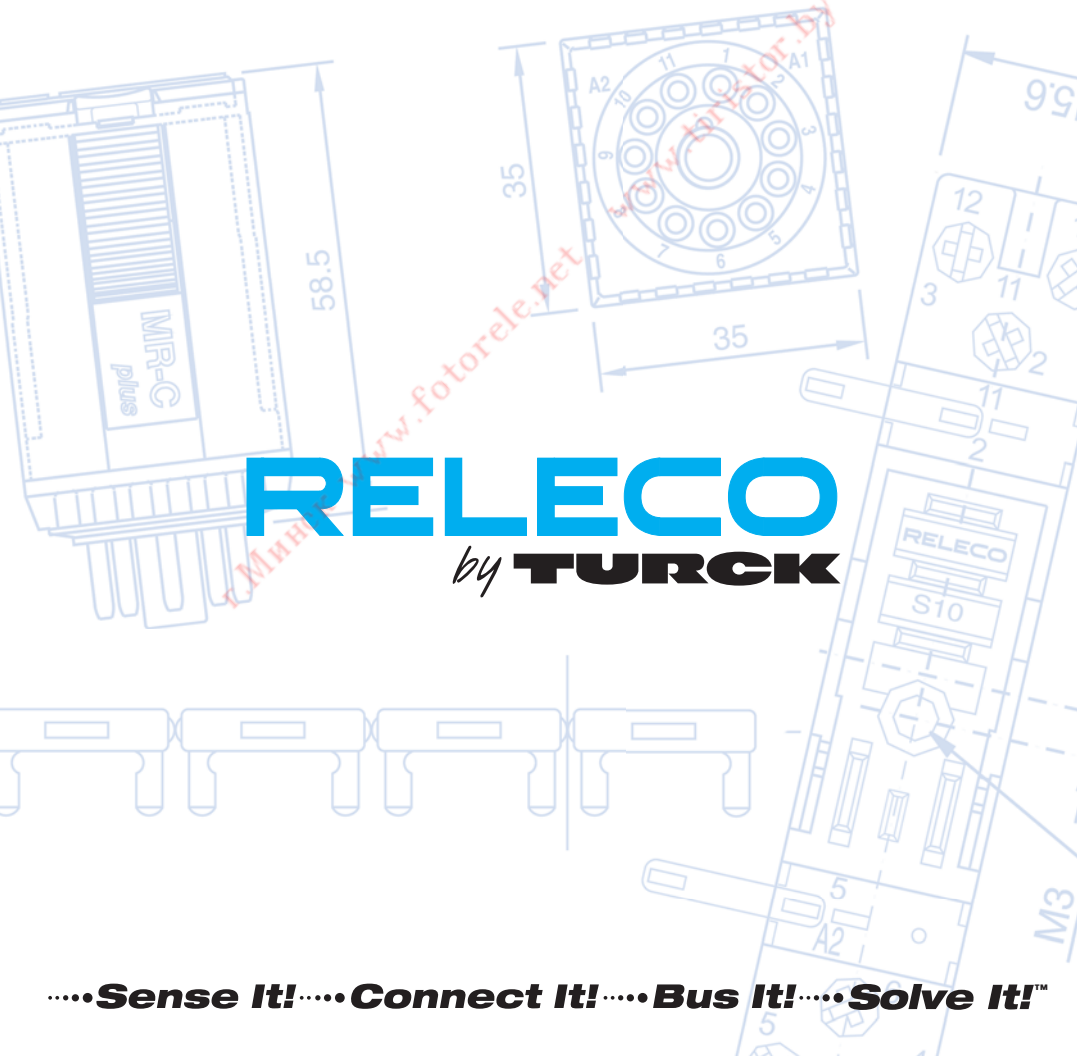

**RELECO**  
by **TURCK**

...Sense It!...Connect It!...Bus It!...Solve It!™

[www.turck.us](http://www.turck.us)

# TURCK


YOUR **AUTOMATION SOLUTIONS** PROVIDER



PROXIMITY SENSORS



CORDSETS



I/O SOLUTIONS



MEASUREMENT



RFID



INTERFACE MODULES



CUSTOM CONNECTIVITY



POSITION



NETWORK MEDIA



г.Минск [www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by)  
email [minsk17@tut.by](mailto:minsk17@tut.by) тел.+375447584780

TURCK's global support network consists of over 2,500 employees in 25 countries and 60 exclusive agencies worldwide that strive to meet customer expectations. Our sales, support and manufacturing facilities are strategically located across the world allowing us to respond to local market conditions and deliver customer specific solutions on a timely basis.


We are a world leader in **automation technology** with a diverse and broad product portfolio that provides customer specific applications with high performance, reliable and cost effective solutions. The synergy in our product portfolio and customization flexibility are key components of our value proposition.

Our expertise spans across two major industry categories: **Industrial Automation** and **Process Automation**. Each weighs in with its own unique requirements and methods of conducting business. This market centric approach ensures that we develop application specific solutions across a variety of vertical market segments.



# RELECO by TURCK RELAYS

Introduction	6
Relays	15
Sockets	63
Timers	83
RINT	87

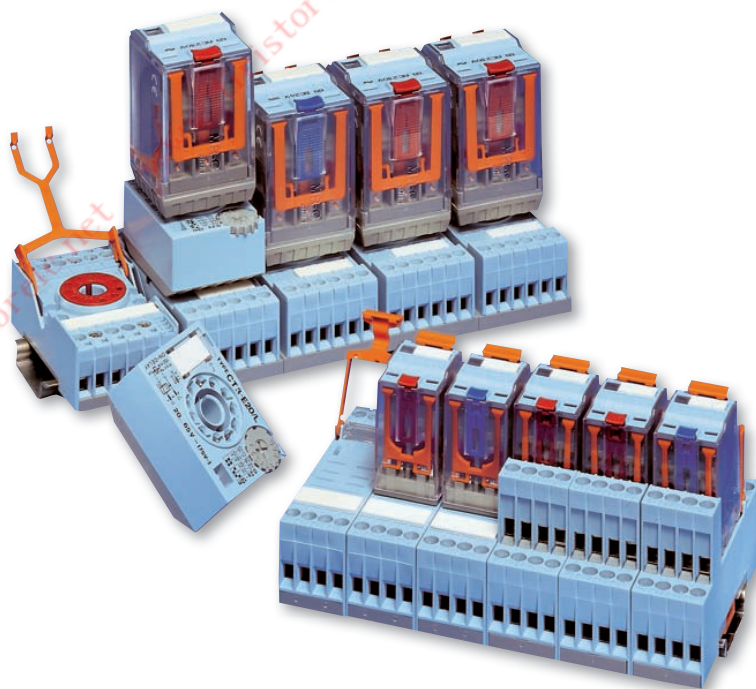

Application	Types		Poles	AC Ratings	DC Ratings	Page	Sockets	Page
<b>General Purpose</b>	C2-A20	Universal 8-Pin, Standard	2	10 A @ 250 V	0.5 A @ 110 V	16	S2	64-66
	C3-A30	Universal 11-Pin, Standard	3	10 A @ 250 V	0.5 A @ 110 V	19	S3	66-69
	C4-A40	Square Base, 4-Pole	4	10 A @ 250 V	0.5 A @ 110 V	28	S4	70-71
	C5-A20	Square Base, AC Power	2	16 A @ 500 V	0.5 A @ 110 V	31	S5	71-72
	C5-A30	Square Base, AC Power	3	16 A @ 400 V	0.5 A @ 110 V	32	S5	71-72
	C7-A10	Miniature, AC Power	1	16 A @ 250 V	0.5 A @ 110 V	38	S7	73-76
	C7-A20	Miniature, AC Power	2	10 A @ 250 V	0.5 A @ 110 V	39	S7	73-76
	C7-A20E	Miniature, AC Power	2	10 A @ 250 V	0.5 A @ 110 V	40	S7	73-76
	C9-A41	Miniature, 14-Pin Plug-in	4	5 A @ 250 V	0.2 A @ 110 V	48	S9	76-77
	C10-A10	Interface Standard	1	10 A @ 250 V	0.5 A @ 110 V	51	S10	78-80
	C10-A10E	Interface Standard	1	10 A @ 250 V	0.5 A @ 110 V	52	S10	78-80
	C12-A21	Interface Standard	2	5 A @ 250 V	0.5 A @ 110 V	56	S12	80-81
<b>Bifurcated Contacts</b> Low Level Loads	C2-T21	Universal 8-Pin Plug-in	2	6 A @ 250 V	6 A @ 30 V	17	S2	64-66
	C3-T31	Universal 11-Pin Plug-in	3	6 A @ 250 V	6 A @ 30 V	20	S3	66-69
	C7-T21	Miniature	2	6 A @ 250 V	6 A @ 30 V	41	S7	73-76
	C10-T13	Interface Twin	1	6 A @ 250 V	6 A @ 30 V	54	S10	78-80
	C10-GT13	Interface Twin N.O.	1	6 A @ 250 V	6 A @ 30 V	55	S10	78-80
<b>Bifurcated Contacts</b> Current Level Loads	C7-H23	Miniature	2	10 A @ 250 V	6 A @ 30 V	44	S7	73-76
<b>Open Contacts</b> DC Load Switching Flag Not Available	C2-G20	Universal 8-Pin Plug-in	2	10 A @ 250 V	1.2 A @ 110 V	18	S2	64-66
	C3-G30	Universal 11-Pin Plug-in	3	10 A @ 250 V	1.2 A @ 110 V	21	S3	66-69
	C5-G30	Square Base	3	16 A @ 400 V	1.2 A @ 110 V	33	S5	71-72
	C7-G20	Miniature	2	10 A @ 250 V	0.8 A @ 110 V	42	S7	73-76
	C10-G10	Interface N.O.	1	10 A @ 250 V	0.8 A @ 110 V	53	S10	78-80
	C12-G21	Interface N.O.	2	5 A @ 250 V	0.8 A @ 110 V	57	S12	80-81
<b>Double Make</b> DC Load Switching Flag Not Available	C3-X10	11-Pin, DC Power	1	10 A @ 250 V	7 A @ 110 V	23	S3	66-69
	C4-X20	Square Base, DC Power	2	10 A @ 250 V	7 A @ 110 V	29	S4	70-71
	C5-X10	Square Base, DC Power	1	16 A @ 400 V	7 A @ 110 V	34	S5	71-72
	C7-X10	Miniature, DC Power	1	10 A @ 250 V	6 A @ 110 V	43	S7	73-76

Application	Types		Poles	AC Ratings	DC Ratings	Page	Sockets	Page
<b>Latching</b>	C3-R20	11-Pin Plug-in	2	10 A @ 250 V	0.5 A @ 110 V	24	S3	66-69
	C4-R30	Square Base, 14-Pin	3	10 A @ 250 V	0.5 A @ 110 V	30	S4	70-71
	C5-R20	Square Base	3	10 A @ 400 V	0.5 A @ 110 V	37	S5	71-72
LED Not Available	C9-R21	Miniature	2	5 A @ 250 V	0.2 A @ 110 V	49	S9	76-77
<b>Magnet Blow-out</b>	C3-M10	11-Pin Plug-in, High DC Load	1	10 A @ 250 V	10 A @ 220 V	22	S3	66-69
	C5-M10	Square Base, High DC Load	1	16 A @ 400 V	10 A @ 220 V	35	S5	71-72
	C5-M20	Square Base, High DC Load	2	16 A @ 250 V	7 A @ 110 V	36	S5	71-72
<b>Sensitive</b> 500 mW - 800 mw	C3-E24	Universal 11-Pin Plug-in	2	6 A @ 250 V	6 A @ 30 V	25	S3	66-69
	C3-N34	Universal 11-Pin Plug-in	3	6 A @ 250 V	6 A @ 30 V	26	S3	66-69
	Flag Not Available	C9-E21	Miniature	2	5 A @ 250 V	5 A @ 30 V	50	S9
<b>Lamp Switching</b>	C7-W10	Miniature, FASTON 187	1	10 A @ 250 V	0.5 A @ 110 V	45	S7	73-76
<b>Railway Applications</b>	R3-N30D	Universal 11-Pin Plug-in	3	6 A @ 250 V	6 A @ 30 V	27	S3	66-69
	R7-A20D	Miniature	2	10 A @ 250 V	10 A @ 30 V	46	S7	73-76
	R7-T21D	Miniature, Twin Contacts	2	6 A @ 250 V	6 A @ 30 V	47	S7	73-76
<b>Solid State Relay</b>	CSS-AC	Instantaneous	1	3 A @ 250 V	N/A	60	S10	78-80
	CSS-AZ	Zero-cross	1	3 A @ 250 V	N/A	61	S10	78-80
	CSS-DCN	Common Negative	1	N/A	2 A @ 50 V	59	S10	78-80
	CSS-DCP	Common Positive	1	N/A	2 A @ 50 V	58	S10	78-80
<b>Time Cube</b>	CT2	8-Pin Plug-in Timer Module	2	10 A @ 250 V	0.5 A @ 110 V	84-85	S2	64-66
	CT3	11-Pin Plug-in Timer Module	3	10 A @ 250 V	0.5 A @ 110 V	84-85	S3	66-69
<b>Interface Module</b>	RINT	Interface Module	N/A	6 A @ 250 V	2 A @ 24 V	88-91		



# System Features & Benefits

## Five Colors for Easy Identification of Coil Voltage

AC		<b>Red:</b> 120 VAC
		<b>Maroon:</b> AC other than 120 V
DC		<b>Grey:</b> VAC/DC
		<b>Dark Blue:</b> DC other than 24 V
		<b>Blue:</b> 24 VDC


If you do not want the lockable function, you can use the orange dead-man-push-button. S0-OP for MRC and S9-OP for QRC (5 piece bag).

• **Dead-man-push-button**



A black blanking plug is available if you don't want a test button. S0-NP for MRC and S9-NP for QRC (5 piece bag).

• **Blanking Plug**

## Comprehensive Technical Label

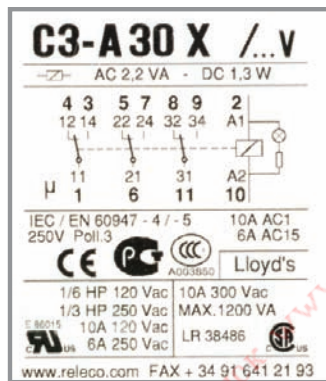

- Coil Power
- Wiring diagram with sequential and DIN numbers
- Electrical diagram showing all additions to the coil
- Maximum switching capacity according to EN 60947 (IEC 947)
- Approvals

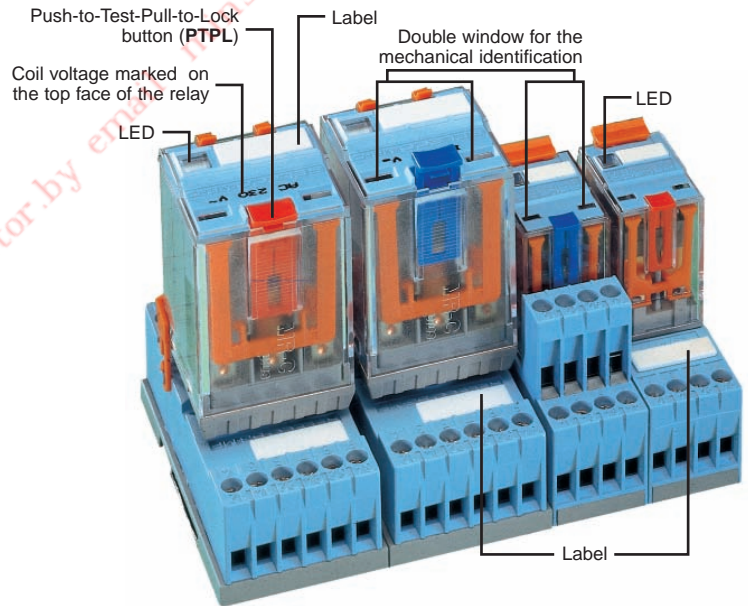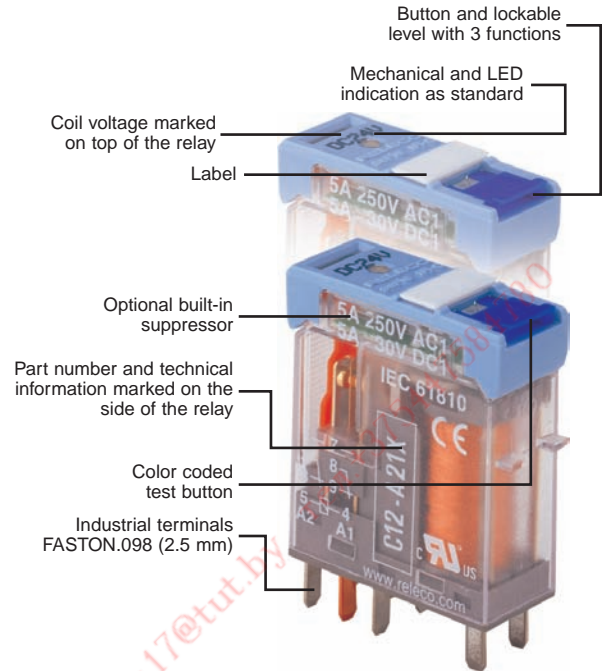

Country	Approval	Country	Approval
Canada	Authority: CSA Specification: C 22.2; UL 508	United Kingdom	Authority: Lloyd's Register of Shipping
China	Authority: CQC Specification: GB14048.5-2001		
Russia	Authority: KORPORATSIA STANDARD Specification: GOST R 50030.5.1	USA	Authority: UL Specification: C 22.2; UL 508

## Industrial Relays MRC, QRC, IRC Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

C	n(n)	-	T	S	y	zz	/...V	Ref.	nnnn	
<b>Normal Industrial Relay code</b>								<b>Ref. nnn</b>		
Relays with code R are used for railway series.								Relays with a reference number are versions with special (e.g. customised) features. These features may relate to special test criteria, tolerances or other properties.		
<b>Basic type refers to the product line</b>								Availability of such relays may be limited to certain customers or applications.		
Numbers between 2 and 12 are used.								<b>Nominal coil voltage or current</b>		
<b>Relay Type</b>								AC ... V, DC ... V, UC ... V (AC/DC), AC ... A, DC ... A		
A = Standard (general-purpose) contact E = Sensitive drive with 500 mW coil power G = Refers to a NO contact H = Single-point contact + twin contact load to signal current circuit for switching state feed back. Mixed contact configuration M = Relay with highly effective neodimium blow magnet for fast quenching of the arc. This relay is particularly suitable for high DC loads. N = Sensitive drive 800mW coil power R = Code for remanence relays, drive-specific ID S = Sensitive drive with 250 mW exciter input T = Twin contact for signal and control circuit W = With tungsten contact for maximum switch-on currents								Relays are generally available for voltages of 6 V. DC 220 V/AC 240 V (AC 400 V) or UC 6 . 48 V. Current relays available on request.		
<b>Number of Contacts</b>								<b>Options</b>		
								D = Integrated freewheeling diode F = Integrated freewheeling diode and series diode e.g. for common alarm circuits R = RC connection for the coil X = Electric position indicating device with LED B = Bridge rectifier		
								<b>Definition of Contact Material</b>		
								This code may differ depending on type. Examples: 0 = in the standard range stands for AgNi 1-9 = see contact material for each type		

### Product range

Releco offers a wide range of relay types and versions and associated bases and accessories.

#### Standard (general-purpose) relay, MRC series

35 x 35 mm round plug-in relay, 8- or 11- terminals multipole connector according to IEC 67 with 2 or 3 contacts up to 10 A and different contact types and contact materials. Standard relay 35 x 35 mm with flat blade connectors with up to 4 contacts and up to 16 A with 3 contacts.

#### Miniature industrial relay, QRC series

22.5 mm series with up to 4 contacts and up to 10 A with 1 or 2 contacts

#### Interface relay, IRC series

Overall width 13 mm with up to 2 electromechanical contacts, or fully electronic switches.

#### Special relays, remanence relays

While "normal" relays are monostable, i.e. they return to the idle state when the excitation is switched off, remanence relays are bistable, i.e. the current switching state is retained irrespective of the excitation. Relays of this type are available in different versions.

### Electronic relay, CSS

In the IRC series different electronic DC or AC relays up to 3 A are available. For AC relays a distinction is made between synchronously (zero crossing) and asynchronously switching versions. For switching transformer loads we recommended using asynchronously switching semiconductor switches. For incandescent lamp loads etc. synchronously switching switches are ideal for avoiding high switch-on currents.

### Accessories

Suitable bases are available for the different relay series for DIN rail mounting or panel mounting. In addition, retaining clips are available for the relays, some of which are included in the scope of supply. Suitable bridges for cost-saving wiring in series are also available.

## Terminology and Technical Information

### Contact Materials

Silver-nickel (AgNi) and silver-tin oxide (AgSnO<sub>2</sub>) are used as standard contact materials for all models. Other contact materials are available on request.

### Gold Flash

For relays that are intended to be stored or remain unoperated for any length of time, a 0.2μ layer of gold protects the contacts from oxidization.

### Gold Plating

A 10μ plate of gold increases the operational reliability. It should be used for switching low level currents.

### Contact Resistance

Contact resistance is dependent on contact material, contact pressure and contact contamination.

High contact resistance raises the temperature of the contacts, therefore reducing their working life. Typical contact resistance of the MR-C and QR-C relays is 50 mΩ.

### Contacts Gap

Contact gap and opening speed of the contacts have an influence on the length and the duration of the arc.

In the case of AC, a gap of 0.5 mm is sufficient to quench the arc which occurs automatically at the “zero point” of the cycle.

In the case of DC, the arc only quenches when the contact gap is sufficient for the voltage and current applied. Please see tables of “Max. DC Current”.

### Coil Materials

Coil bobbins are molded in polybutylene with fiberglass (130°C).

Enamelled wires of Class F specification are used (155°C).

They are wound on precision automation winding machines, with the number of turns and wire tension accurately regulated and monitored.

### Tolerances

Coil resistance is measured at 20°C and is regulated within ±10% of specified value.

### Standard Windings

The coil voltages indicated in the catalog refer to standard windings. Other coil voltages are available, including products for series connection and amperometric applications. Please consult your distributor for details.

### Maximum Intensity

The “Max. switching current” indicated in every model, refers to the maximum stable current which should be possible in permanent conduction (ITH).

In the case of AC, the “Max. switching current” that the relay can support is the same for all the values of voltages ≤ of the “Max. switching voltage” specified in every model.

The product of the intensity and the voltage applied should not be higher than the values specified as “Max. AC load”.

In the case of DC, the “Max. switching current” must be less than the current that causes the continuous arcing.

The tables of “Max. DC current” show the possible values of intensity in relation to the applied voltage.

### Maximum Voltage

The maximum voltage on the contacts depends on the insulation between each contact (pole-to-pole) and between all contacts and the coil.

The EN 60947 and VDE 0110 standards set out the maximum voltage values, taking into consideration the quality of the insulation materials, pollution degree as well as the shape and dimensions of the contact barriers (creepage distance).

### Contacts in Series

The connection of two or more contacts in series is equivalent to multiplying the contact gap by that amount. By using this method, a greater break capacity is achieved for DC switching.

### Minimum Working Voltage (pull in)

This is the minimum voltage that must be supplied to the coil to ensure that the relay energizes, the contacts change over and are positively held in place without any vibration.

The values of voltage specified are those at or below which the relay must pull in.

Working at:  
AC 50 Hz Relays  
AC 60 Hz Relays  
DC Relays

50 Hz	60 Hz
0.8xU <sub>n</sub>	0.85xU <sub>n</sub>
0.75xU <sub>n</sub>	0.8xU <sub>n</sub>

0.8 x U<sub>n</sub>

### Maximum Release Voltage (drop out)

This is the voltage at which the relay de-energizes, the contacts change over and are positively held in place without any vibration.

The values of voltage specified are those at or above which the relay must drop out.

DC relays ≤10% U<sub>n</sub>  
AC relays ≤20% U<sub>n</sub>

### Contacts in Parallel

The connection of two or more contacts in parallel does not mean that it is possible to switch a greater load. However, the stable current and the operational reliability of the relay is increased.

### Double Make Contacts

The double make contact arrangement is equivalent to two contacts connected in series.

The maximum intensity supported corresponds to only one contact. This system allows for higher DC operating voltages.

### Bifurcated (Twin) Contacts

The contact blade is divided into two parts, each with its own contact. Both contacts press down on their own independent fixed contacts.

This system is particularly good for switching at very low levels of current.

### Contact Protection

The electrical life of contacts can be prolonged by components which eliminate or reduce the back EMF transients. These voltages are generated by the reactive component of the load on disconnection, which increases the duration and the temperature of the arc.

For AC, RC suppressors or varistors can be connected in parallel with the load or the contacts.


For DC with an inductive load, the best method is to connect a diode in parallel with the load.

### Ambient Temperature

The ambient temperature has an influence on the coil resistance and on its thermal dissipation capacity.

Curve 1 represents the variations of the pull in voltage (%U<sub>n</sub>) in relation with the ambient temperature (T).

Curve 2 indicates the maximum values of the voltage applied (U<sub>b</sub>) to the coil in relation with the nominal voltage (U<sub>n</sub>) at the ambient temperature (T).

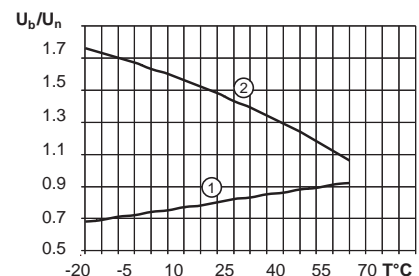



## Relay Types Based on Applications

### **A** General Purpose Relays

These are used for most general applications, such as automation, pneumatic, heating appliances, signaling, as an input or output interface, etc.

Change-over contacts. Isolation between N.O./N.C.:  $1000 V_{rms}$   
Gap: 0.5 mm

Rating loads of up to:

- 16 A @ 230 V AC1
- 16 A @ 30 V DC1
- 0.5 A @ 110 V DC1
- 0.2 A @ 220 V DC1

### **T** Relays with Twin Contacts

These are used to switch low currents with high operational reliability.

Change-over contacts. Isolation between contacts N.O./N.C.:  $1000 V_{rms}$   
Gap: 0.5 mm

Gold-flashed contact  $0.2\mu$  or plated with  $10\mu$  Au (optional).

Maximum load: 6 A @ 230 V AC1  
Minimum load: 1 mA @ 5 V DC1

### **S** Sensitive Relays, 250 mW

One change-over contact

### **E** Sensitive Relays, 500 mW

Two change-over contacts

### **N** Sensitive Relays, 800 mW

Three change-over contacts

DC relays adjusted to work at lower power, available in both MR-C and QR-C versions. Gold-flashed contacts  $0.2\mu$  or plated  $10\mu$  Au (optional).

Operational voltage range:

- S** relays: 0.8 - 2.5  $U_n$
- E** relays: 0.8 - 1.7  $U_n$
- N** relays: 0.8 - 1.4  $U_n$

### **G** Relays with Open Contacts

An open contact arrangement allows an increase in the contact gap, increasing the DC "break capacity" without altering the AC performance.

Gap: 1.5 mm(QR-C types);  
1.7 mm(MR-C)

Isolation of contacts NO:  $>2000 V_{rms}$

Maximum load:

- 16 A @ 230 V AC1
- 1.2 A @ 110 V DC1
- 0.4 A @ 220 V DC1

### **X** Double Make Relays

These relays are designed to switch high DC loads at voltages of 110 and 220 VDC.

If consists of one normally open contact with a gap  $> 3$  mm so that the arc length is divided by two.

Isolation between contacts:  $>2000 V_{rms}$

The max. DC load is shown in the tables.

**X** versions are available in MR-C and QR-C type housing.

### **W** High Inrush Current Relay

Two open contacts, one of silver nickel and one of tungsten work in parallel but are physically displaced so that the tungsten contact makes and breaks the load. The silver contact is used for carrying the stable current.

This relay was designed to switch incandescent and fluorescent lamps, (with p.f. corrected), and DC inductive loads.

Only available in **C7** type housing.

Maximum loads:

- 6 A @ 230 V AC5a/b (lamps)
- 10 A @ 230 V AC15
- 1.5 A @ 110 V DC1

### **M** Relays with "Mag. Blow Out"

These versions are similar to X types, however they have an addition of a powerful magnet which "blows out" the arc generated when the contacts are opened, therefore quenching the arcing quickly and increasing the contact life.

They are able to switch DC loads of up to 10 A @ 222 V DC1 and 2 A @ 220 V DC13

### **R** Remanence Relays

A high remanence magnetic circuit allows the relay to latch positively when the current applied flows through the coil in a direction and delatches if the current flows in the opposite direction.

Electronic circuitry is added inside the relay to control this action and also protects against transient voltages.

There is one winding for AC coils and two windings for DC coils.

All coils withstand permanent connection.

The relay can be operated with pulses of 50 ms, minimum, at nominal voltage.

### Specifications

The data referred to in the specifications for each model refers to typical values of "new" relays at 20°C.

### Tables

The tables of electrical life and the tables of maximum DC current show the typical result of exhaustive tests performed at an ambient temperature of 20°C, operating frequency of 1,200 operations/hour, and under permanent connection.


The switching current ratings specified in the catalog refer to a minimum electrical life of 100,000 operations.

### Margin of Over-Voltage

Coils withstand, on permanent connection, a maximum over-voltage of 110 percent  $U_n$ , with rated current through the contacts at an ambient temperature of 60°C.

### Custom Relays

Relays with special specifications can be supplied after consultation with an official RELECO distributor.

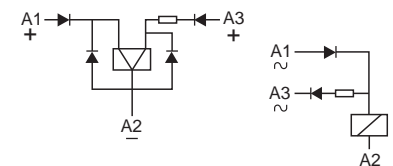

## Coil Accessories

### MRC - QRC

#### Protection Against Transients

When the coil is disconnected from an electromagnet, peaks of inverse voltage appear at the terminals which can reach very high values. These pulses can be transmitted down the line associated with the coil and could possibly affect other components.

In the case of a relay being operated by such devices as transistors, triacs, etc; it may be necessary to protect against transients.

#### Transients Carried in the Line

High voltage surges can be carried in the supply line to the relay coil. These may appear in the form of peaks or bursts and are generated by the connection and disconnection of electric motors, transformers, capacitors, etc.

Normally a relay is unaffected by these pulses, but if a diode is connected in association with the coil, it must be capable of withstanding an inverse voltage higher than those of the incoming peaks.

#### Protection Circuits

A protection circuit must efficiently cope with pulses generated by the coil as well as incoming line surges (surges  $U_{1.2/50\mu s}$ ).

RELECO relays are available with integrated protection circuits or with modules plugged into sockets S3-MP or S3-MS.

**X** LED indication with rectifier.  
For DC and AC relays up to 250 V  
Surges of 1000 V up to 24 V  
Surges of 2000 V from 25 to 60 V  
Surges of 4000 V from 61 to 250 V

Note: LED connected in series with the coil @ 220 VDC in QRC types.

**D** Free-wheeling diode.

**DX** Free-wheeling diode + LED  
Dampens transients caused by the relay coil on de-energization.  
Surges of 2000 V up to 60 VDC  
Surges of 4000 V from 61 to 250 VDC (\*)

**F** Polarity and free wheeling diodes.

**FX** Polarity + free wheeling diode + LED

A diode in series with the coil protects the relay from reverse connection.  
Surges of 1000 V up to 60 VDC  
Surges of 4000 V from 61 to 250 VDC (\*)

**B** Bridge rectifier incorporated.

**BX** Bridge rectifier + LED indication.  
Allows the relay to operate in both AC or DC without any polarity inconvenience. Available only in voltages up to 60 V  
Surges of 1000 V

**R** Resistor and capacitor.  
Suppressor for AC coils.  
Surges of 2000 V  
Available only in MRC types

(\*) Surges of 2000 V in QRC types.

### IRC

#### LED and protection circuit connected to coil.

**X** LED with no polarity, (standard)  
Coils  $\leq 12$  V CC and CA  
LED rectifier bridge in parallel

**X** LED with no polarity, (standard)  
Coils  $\geq 24$  V CC and CA  
LED rectifier bridge in series

**FX** LED with polarity A1+ (option)  
Every DC coil voltage  
Polarity and Free-wheeling diodes

**BX** LED with no polarity, (option)  
Only 24 V and 48 V AC/DC coils  
Rectifier bridge for AC/DC relays

**R** LED not available (option)  
Every AC coil voltage  
RC protection against pulses on AC

#### Protection Against Pulses


When a relay coil is disconnected, reverse voltage peaks may arise and reach very high values. Said peaks can transmit to the coil associated line and other relays or semiconductors can be affected.

If triac, transistor, etc. controls a relay, appropriate steps must be taken to avoid or decrease peaks down to a non-risky level.


Both polarity and free-wheeling diodes (FX), must protect coils, to avoid malfunctions, provided DC relays in battery are installed.

Making or breaking engines, transformers or contactors in an industrial environmental, may generate high voltage pulses, either isolated or burst, through the main line.


The voltage level of those pulse may be high enough to affect the isolation of the coil.




LED consumption: 1 mA









Increases release time approx. 4 times



Increases release time approx. 4 times



Increases release time approx. 3 times



## Total Interconnection, Bridge Bars for Coil and Power Lines

### Bridge Bars Connection on S10-M and S12 Sockets

Examples of mounting. Not at scale.

New S10-M and S12 sockets and new connection bridges B20, V10 and V40 permit quick and easy wiring for relays in battery, in groups or in any other combination of voltages, coils or contacts.

Every bridge allows mounting with a hybrid configuration of S10-M and S12 sockets. The immediate identification of the different circuits means a lower mounting cost, inspection or maintenance.

Available in grey (standard), red (AC) and blue (DC), following the same color coding adopted by RELECO in testing buttons to identify its relays.

### V40 Bridge Bars for Power Lines

V40 bridges allow joining common points in the power connection, usually the change-over contacts 11 or 21 on relays. They can be also used to bridge NC or NO terminals.

V40 bridges join four similar points in four adjacent sockets. They can join among themselves or to V10 units to bridge an unlimited number of sockets in any combination.

Made of copper with a current capacity of 40 A.


### V10 Bridge Bars for Power Lines

V10 bridges connect a single socket to the next socket, so can you bridge less or more than four sockets, as long as the total number of sockets is not a multiple of four.

They can join between themselves or to V40 units. If you need to bridge five sockets, you can either use a V40 + 1 V10 or four V10 bridges.

Made of copper with a current capacity of 40 A.

It is necessary that the total sum of loads in a relay group will not exceed the **maximum intensity of 40 A**, permitted by the power bridges. If exceeded, the essential power cables must be added, to share the current and avoid overheating the bridges. Every inlet terminal admit ferrule tips up to 4 sq. mm.

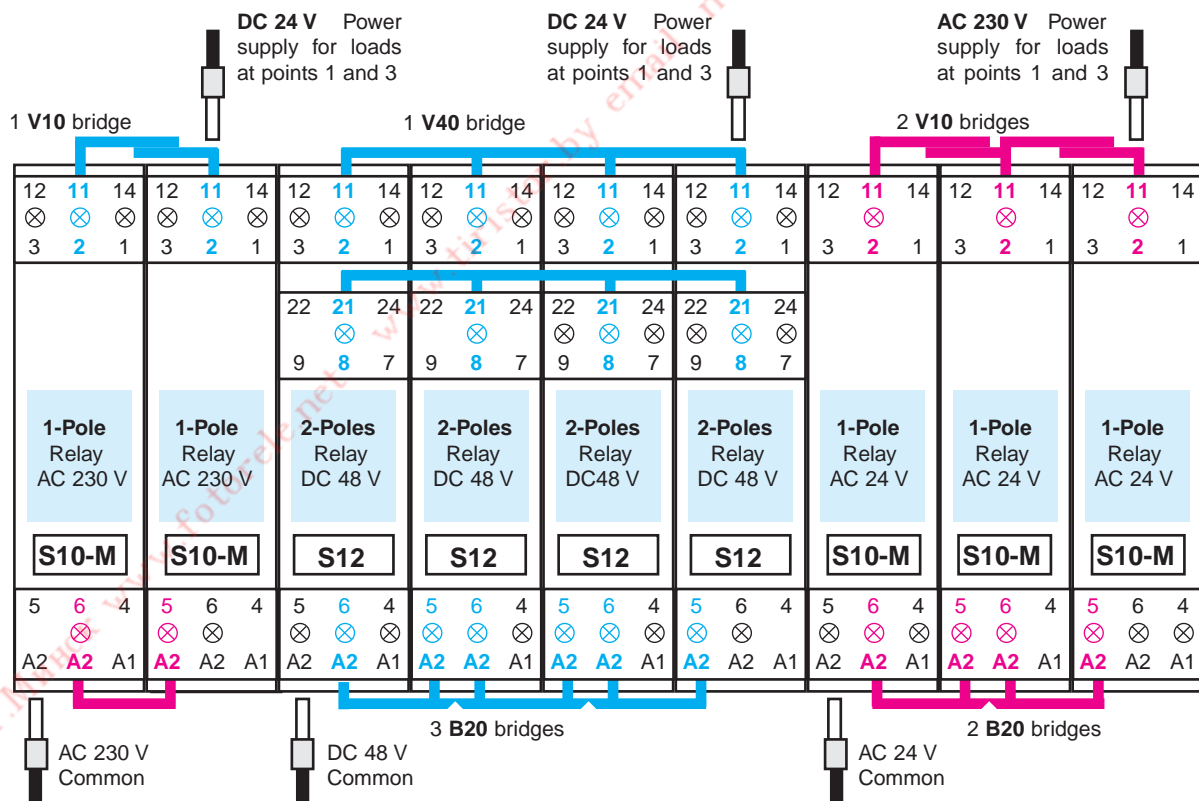

### B20 Bridge Bars for Coil Lines

Both sockets are accessible to point A2 from terminals 5 and 6, internally connected. Each element connects point 6 of the first socket to point 5 of the next one, always leaving free the point 5 of the first socket and the point 6 of the last one, to connect the common polarity cable. Coils control voltage connect to points A1.

Bridge B20 is composed by four units which can be divided in 1, 2 or 3 elements.

**Total Interconnection, Bridge Bars for Coil and Power Lines**

**V40 V10**



Power Bridge Bars for Sockets  
**S10-M and S12**

V40 bridges join four similar points in four adjacent sockets. They can join among themselves or to V10 units to bridge an unlimited number of sockets S10-M and S12 in any combination.

V10 bridges connect a single socket to the next socket, so you bridge less or more then four sockets.

Made of copper with a current capacity of 40 A.

See more information on page 11.

**B20**



Coil Bridge Bars for Sockets  
**S10-M and S12**

B20 bridges points A2, internally connected, of every adjacent socket S10-M or S12.

Each element connects point 6 of the first socket to point 5 of the next one, always leaving free the point 5 of the first socket and the point 6 of the last socket, to connect the common polarity cable.

See more information on page 11.



V40-G



V10-G



V40-R



V10-R



V40-A




V10-A



B20-G



B20-R



B20-A



IEC 61810 EN 60947

**IRC relays, E version**


Types C14... and C15...

Cover for flange panel mounting

**Ordering code:**


Add "E" to the standard type code.

Example: C14-A10E or C15-A21E

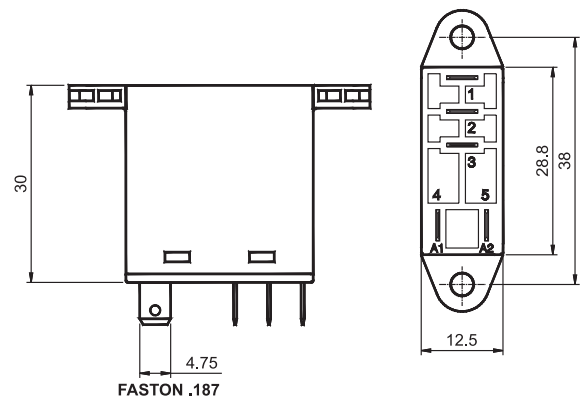

**Total Interconnection, Bridge Bars for Coil and Power Lines**

I/O sockets, IRC relays and bridge bars allow more flexible, economical and aesthetic mounting in interface and general applications.

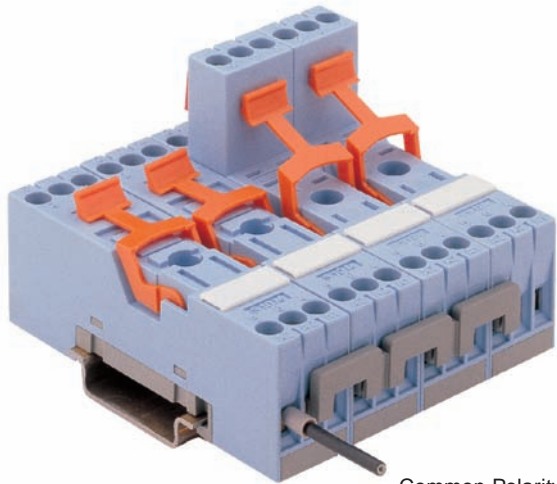

Common Polarity Cable for Coils

**S10-M** and **S12** sockets of 1 and 2 contacts, with inlets in line and identical disposition of contacts set.

Identical sequence of coil and contacts on both sockets.

- Coil terminal on level 1: (A2, A2, A1)
- Contact terminals on level 1: (12, 11, 14)
- Contact terminals on level 2: (22, 21, 24)

Bridge bars between A2 coil terminals with 2 free inlets to connect a common polarity cable. Those bridge bars are isolated and divisible by hand, in single units.

Power bridges with current capacity of 40 A to be connected between contacts 11 or 21 in any combination: Groups or battery of relays, to supply the power current to the loads.

Inlet terminals admit ferrule tips up to 4 mm<sup>2</sup>.


Bridges in grey color as standard.

**Options:**



Adopted colors by RELECO used in the testing buttons of relays:

- Blue, to identify DC circuits
- Red, to identify AC circuits

**B20 Bridge Bars for Coil Line**

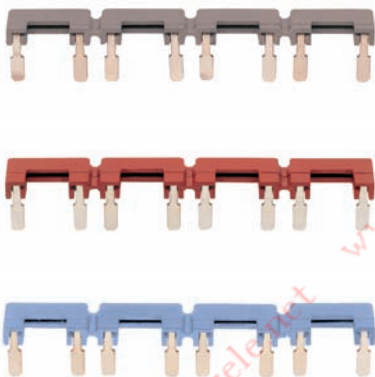

**V40 and V10 Bridge Bars for Power Line**

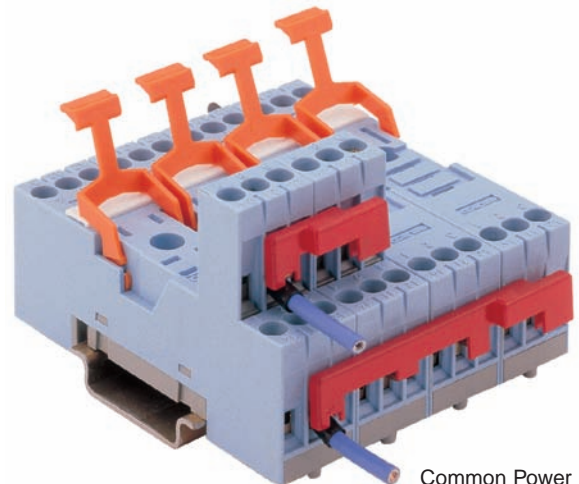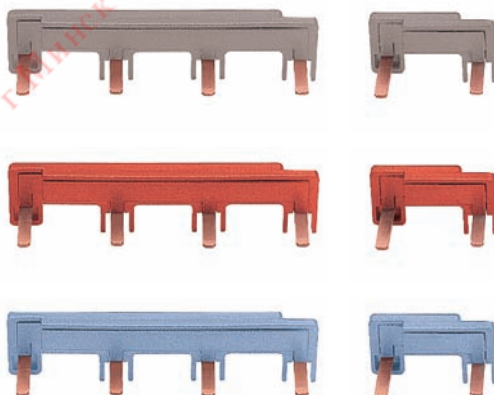

Common Power Supply Cable for Loads

## Total Interconnection, Solid State Relays

### How to Mount Solid State Relays as Interface on PLC

**Input**

In every CSS relay, the input on terminals A1 and A2 is 5-32 VDC, with no polarity.

If bridges to joint points A2 are used, a single voltage can be applied on terminals A1, for every relay, or different voltages within the range 5-32 VDC.

**Output DC or AC (Independent Relays)**

When using a single relay of any model, load can be connected either on terminal 1 or terminal 2.

**Relays with Output on DC (CSS-DCP or CSS-DCN).**  
Range of voltage applied to the load will be 5-50 VDC.

**Relays with Output on AC (CSS-AC, Inductive Loads, or CSS-AZ, Resistive Loads).** Range of voltage applied to the load will be 24-250 VAC, 50/60 Hz.

**Output on DC (Relays in Battery)**

If power bridges are used with S10-M sockets in series of relays in line, it is necessary to attend the common polarity chosen to the loads connection.


Usually the point 2 (11 DIN) is the common point of the socket where positive tension is applied to the loads.

Then CSS-DCP relays must be connected where terminal 2 is common positive.


Said disposition complies Norm EN-60204-1-5,3,3 where "cutting every active element of its feeding" is suggested, that means to switch from the positive.


If point 2 of the socket is taken as negative, relays type CSS-DCN, where terminal 2 is negative must be connected.

For relays CSS-AC or CSS-AZ, only whether the load is inductive or resistive has to be considered, as they have no polarity.

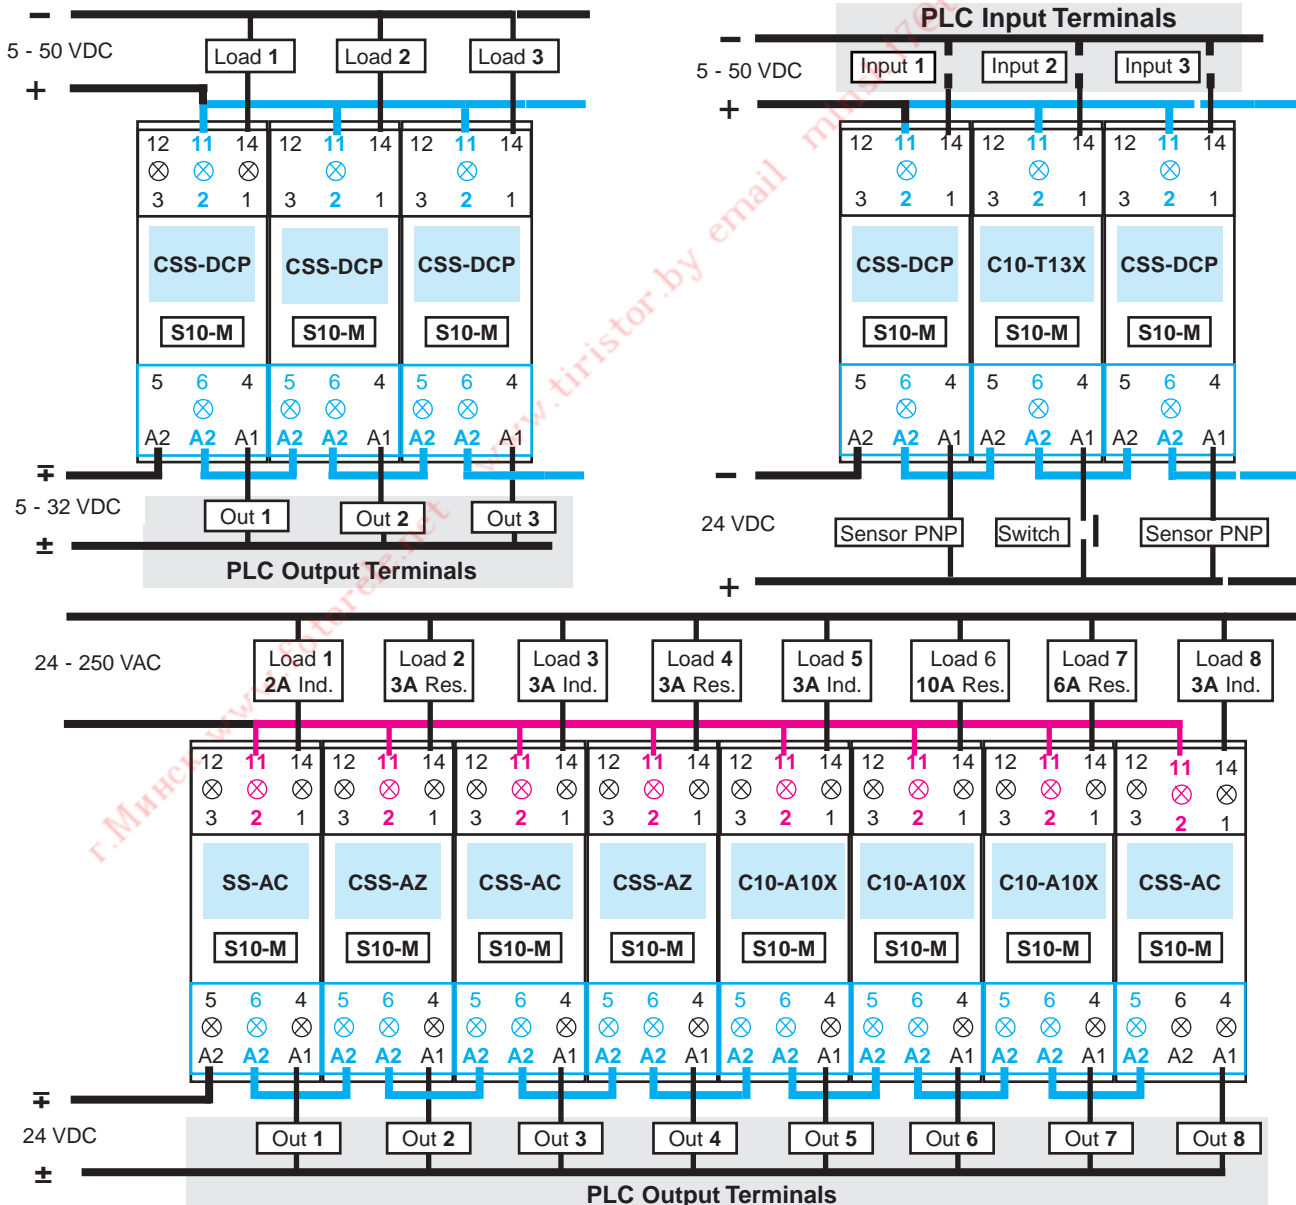


# RELAYS

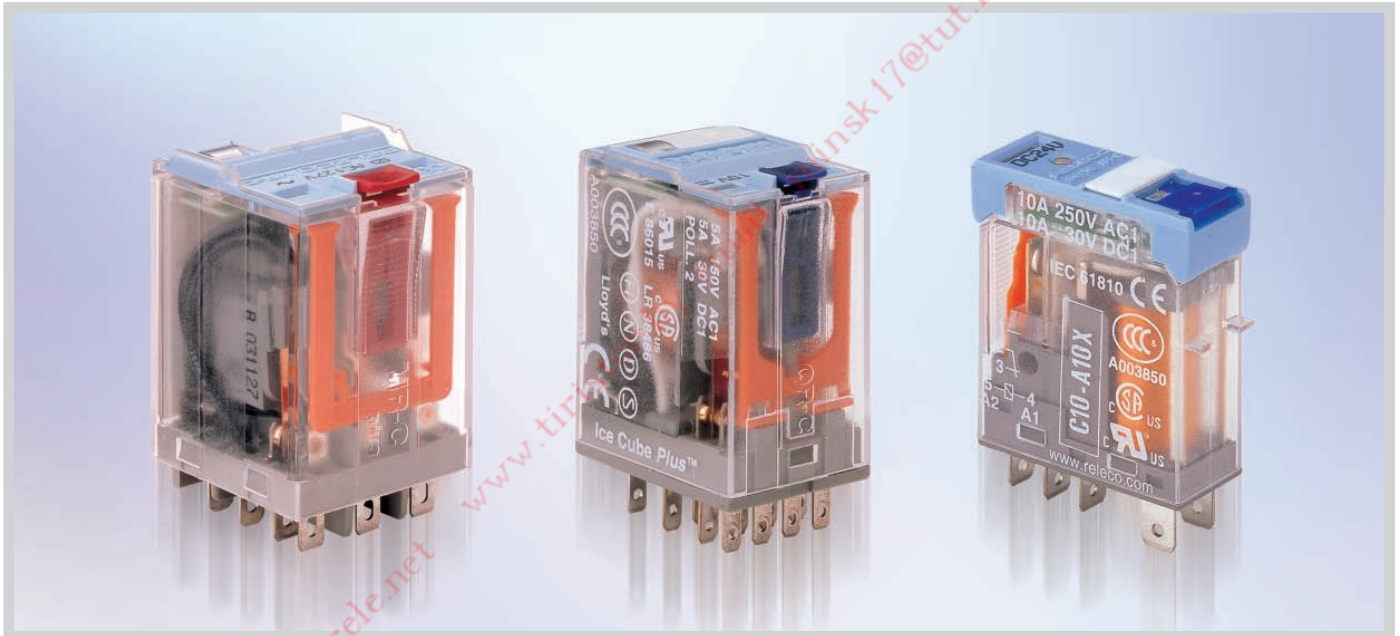





**Relay compatible with sockets:**  
S2-B, S2-S, S2-L, S2-PO




**Table 1** Electrical Life, ops. x 10<sup>6</sup>

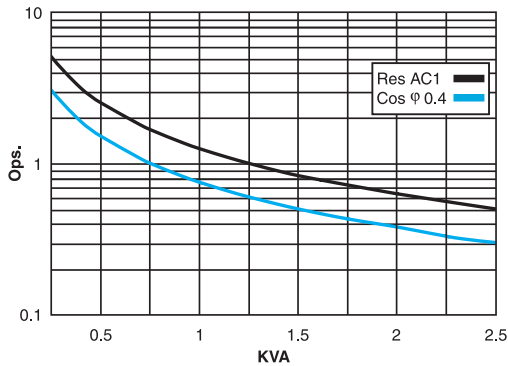

**Table 2** Max. DC Load

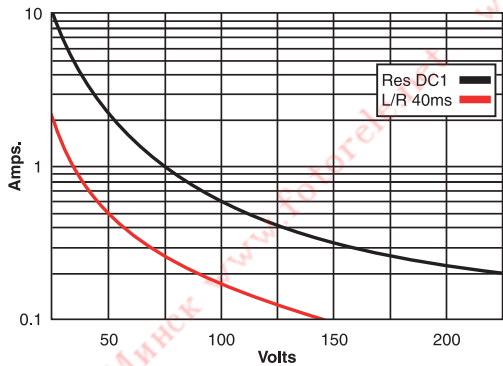

**Dimensions - mm**

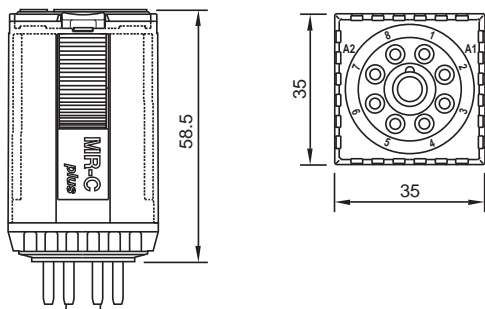

**C2-A20**



General purpose  
Two pole, change-over contacts

**10 A 250 V AC1      0.5 A 110 V DC1**  
**10 A 30 V DC1      0.2 A 220 V DC1**

**Contacts**

Materials: Standard, code 0      AgNi  
Optional, code 8      AgNi + 10μ Au  
Optional, code 9      AgNi + 0.2μ Au

Max. switching current      10 A  
Max. peak inrush current (20 ms)      30 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      2.5 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      2.2 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	433	54
48	296	46	48	1K8	27
115	1K7	19	110	9K2	12
230	7K1	9.5	220	36K1	6

**Insulation**

Dielectric strength (1 minute): Open contacts      1,000 V  
Between adjacent poles      2.5 KV  
Between contacts and coil      2.5 KV  
Isolation resistance at 500 V      ≥1 GΩ  
Isolation, IEC 61810-5:      2.5 KV/3

**Specifications**

Operate time + bounce time      16 ms  
Release time + bounce time      8 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops.      10 Mill. AC, 20 Mill. DC relay  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection degree      IP 40/RT1  
Weight avg.      90 g

**Standard Types**


AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard)      C2-A20X..... VAC  
RC suppressor      C2-A20R..... VAC

DC 24, 48, 110, 220  
X = LED, no polarity (standard)      C2-A20X..... VDC  
Free-wheeling diode      C2-A20DX..... VDC  
Polarity and free-wheeling diodes      C2-A20FX..... VDC  
AC/DC bridge rectifier (24, 48 or 60 V)      C2-A20BX..... VDC





**Relay compatible with sockets:**  
S2-B, S2-S, S2-L, S2-PO



# C2-T21



Low level  
Two change-over bifurcated contacts

**6 A 250 V AC1 6 A 30 V DC1**  
**Min. contacts load: 1 mA / 5 V DC1**

### Contacts


Materials:	Standard, code 1	AgNi + 0.3μAu
	Optional, code 2	AgNi + 10μAu
Max. switching current		6 A
Max. peak inrush current (20 ms)		15 A
Max. switching voltage		250 V
Max. AC load (Table 1)		1.2 KVA
Max. DC load (Table 2)		

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage	≤0.8 x U <sub>n</sub>
Drop-out voltage	≥0.1 x U <sub>n</sub>
Nominal coil power	2.2 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	433	54
48	296	46	48	1K8	27
115	1K7	19	110	9K2	12
230	7K1	9.5	220	36K1	6


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

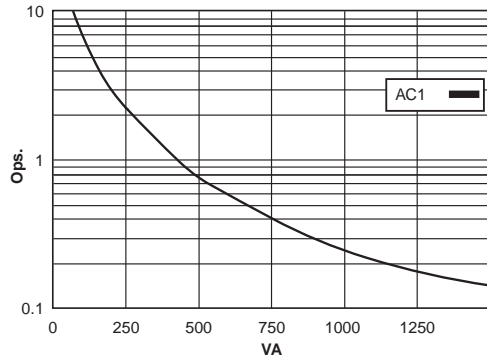

**Table 2** Max. DC Load

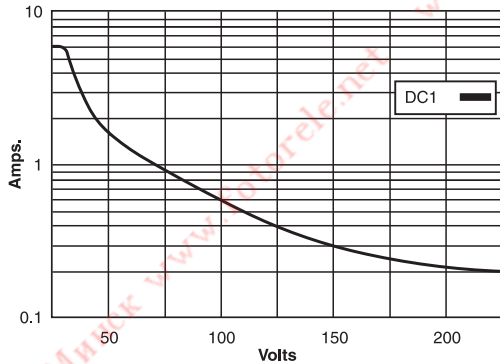

### Dimensions - mm

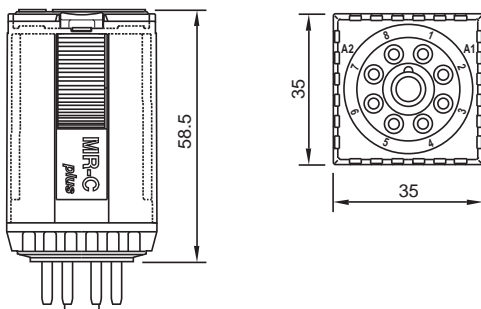

### Insulation

Dielectric strength (1 minute): Open contacts	1,000 V
Between adjacent poles	2.5 KV
Between contacts and coil	2.5 KV
Isolation resistance at 500 V	≥1 GΩ
Isolation, IEC 61810-5:	2.5 KV/3

### Specifications

Operate time + bounce time	16 ms
Release time + bounce time	8 ms
Ambient temperature	-40°C (no ice) to +70°C
Mechanical life ops.	10 Mill. AC, 20 Mill. DC relay
Electrical life at nominal load	100,000 ops.
Operating frequency at nominal load	1,200/hour
Protection degree	IP 40/RT1
Weight avg.	90 g

### Standard Types


<b>AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)</b>	
X = LED (standard)	<b>C2-T21X ..... VAC</b>
RC suppressor	<b>C2-T21R ..... VAC</b>
<b>DC 24, 48, 110, 220</b>	
X = LED, no polarity (standard)	<b>C2-T21X ..... VDC</b>
Free-wheeling diode	<b>C2-T21DX..... VDC</b>
Polarity and free-wheeling diodes	<b>C2-T21FX..... VDC</b>
AC/DC bridge rectifier (24, 48 or 60 V)	<b>C2-T21BX..... VDC</b>




IEC 61810 EN 60947




**Relay compatible with sockets:**  
S2-B, S2-S, S2-L, S2-PO

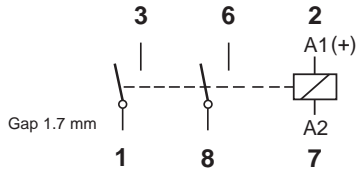


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

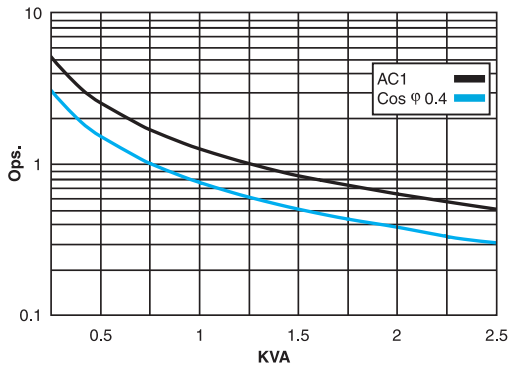

**Table 2** Max. DC Load

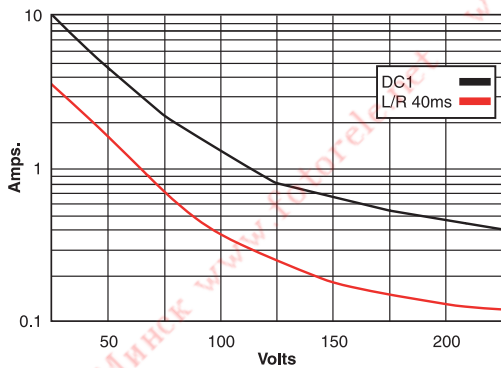

**Dimensions - mm**

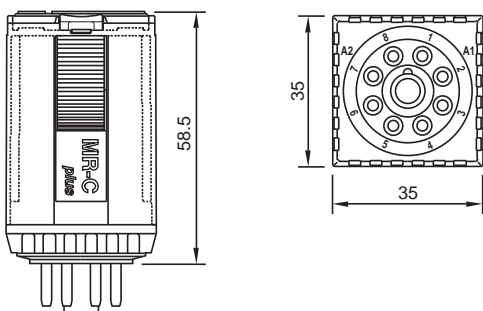

**C2-G20**



General purpose, DC applications  
Two pole open contacts

**10 A 250 V AC1      1.2 A 110 V DC1**  
**10 A 30 V DC1      0.4 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (AC)/1.6 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	360	66
48	286	50	48	1K4	34
115	1K7	21	110	7K6	15
230	6K8	10	220	30K3	7.5

**Insulation**

Dielectric strength (1 minute): Open contacts 2,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, EN 61810-5: 2.5 KV / 3

**Specifications**

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C2-G20X.....VAC**  
RC suppressor **C2-G20R .....VAC**

**DC 24, 48, 110, 220**  
X = LED, no polarity (standard) **C2-G20X..... VDC**  
Free-wheeling diode **C2-G20DX .... VDC**  
Polarity and free-wheeling diodes **C2-G20FX .... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C2-G20BX .... VDC**




IEC 61810 EN 60947



**Relay compatible with sockets:**

**S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO**

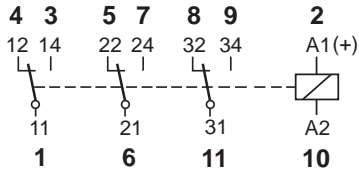

# C3-A30



General purpose  
Three pole, change-over contacts

**10 A 250 V AC1      0.5 A 110 V DC1**  
**10 A 30 V DC1      0.5 A 220 V DC1**

### Contacts

Materials: Standard, code 0 AgNi  
Optional, code 8 AgNi + 10μ Au  
Optional, code 9 AgNi + 0.2μ Au


Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.2 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	433	54
48	296	46	48	1K8	27
115	1K7	19	110	9K2	12
230	7K1	9.5	220	36K1	6


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

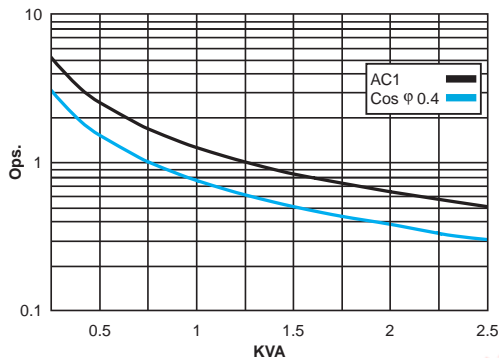

**Table 2** Max. DC Load

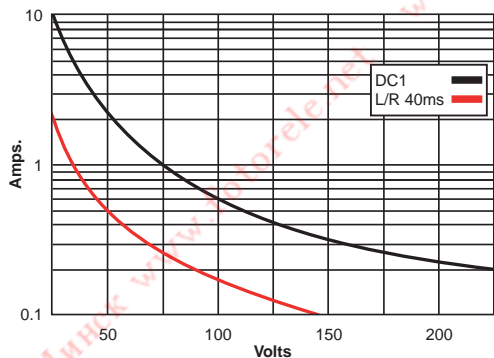

### Dimensions - mm

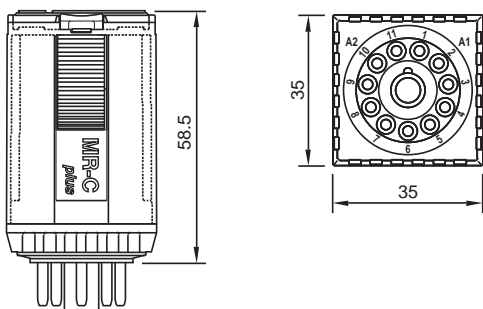

### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-1: 2.5 KV/3


### Specifications

Operate time + bounce time 16 ms  
Release time + bounce time 8 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load 100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

### Standard Types


**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C3-A30X.....VAC**  
RC suppressor **C3-A30R.....VAC**

**DC 24, 48, 110, 220**  
X = LED, no polarity (standard) **C3-A30X..... VDC**  
Free-wheeling diode **C3-A30DX .... VDC**  
Polarity and free-wheeling diodes **C3-A30FX..... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C3-A30BX .... VDC**




Relay compatible with sockets:


S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO

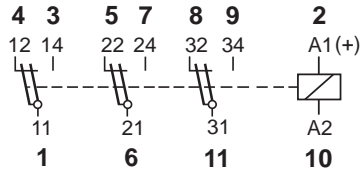


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

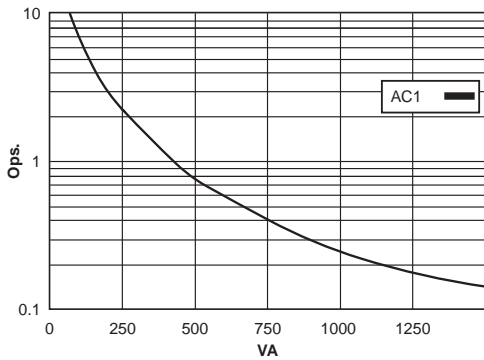

**Table 2** Max. DC Load

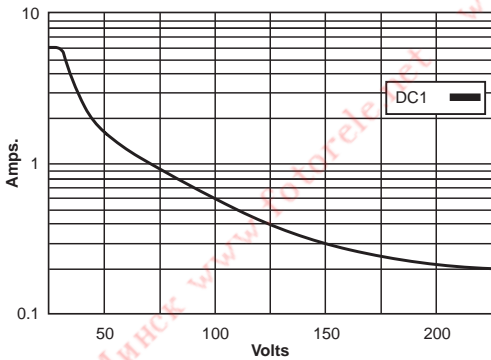

**Dimensions - mm**

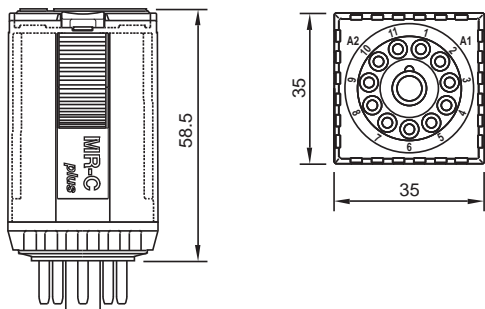

**C3-T31**



Low level  
Three change-over bifurcated contacts

**6 A 250 V AC1 6 A 30 V DC1**  
**Min. contacts load: 1 mA / 5 V DC1**

**Contacts**

Materials: Standard, code 1 AgNi + 0.3µAu  
Optional, code 2 AgNi + 10µAu  
Max. switching current 6 A  
Max. peak inrush current (15 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 1.2 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.2 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	67	92	24	443	54
48	296	46	48	1K8	27
115	1K7	19	110	9K2	12
230	7K1	9.5	220	36K1	6

**Insulation**

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV / 3

**Specifications**

Operate time + bounce time 16 ms  
Release time + bounce time 8 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

**Standard Types**

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard) C3-T31X ..... VAC  
RC suppressor C3-T31R ..... VAC

DC 24, 48, 110, 220  
X = LED, no polarity (standard) C3-T31X ..... VDC  
Free-wheeling diode C3-T31DX ..... VDC  
Polarity and free-wheeling diodes C3-T31FX ..... VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C3-T31BX ..... VDC




IEC 61810 EN 60947




**Relay compatible with sockets:**

S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO




Gap 1.7 mm


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

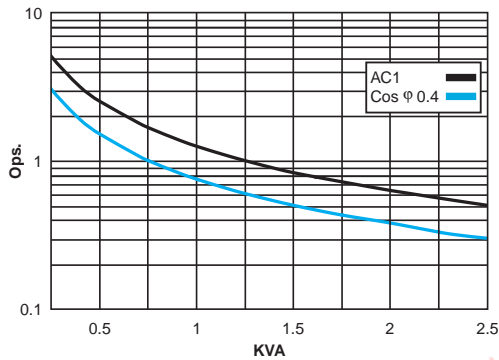

**Table 2** Max. DC Load

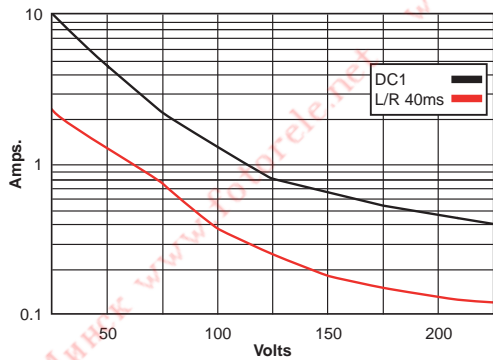

**Dimensions - mm**

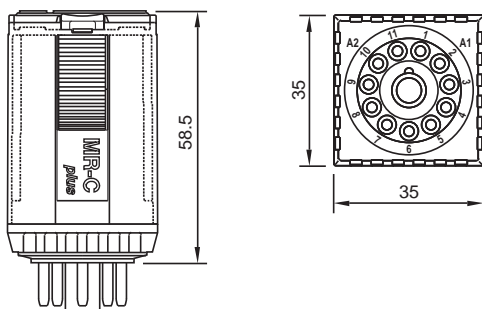

**C3-G30**



General purpose, DC applications  
Three pole, open contacts

**10 A 250 V AC1**      **1.2 A 110 V DC1**  
**10 A 30 V DC1**      **0.4 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (AC)/1.6 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	360	66
48	286	50	48	1K4	34
115	1K7	21	110	7K6	15
230	6K8	10	220	30K3	7.5

**Insulation**

Dielectric strength (1 minute): Open contacts 2,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV/3

**Specifications**

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
**X = LED (standard)**      **C3-G30X.....VAC**  
**RC suppressor**      **C3-G30R .....VAC**

**DC 24, 48, 110, 220**  
**X = LED, no polarity (standard)**      **C3-G30X..... VDC**  
**Free-wheeling diode**      **C3-G30DX .... VDC**  
**Polarity and free-wheeling diodes**      **C3-G30FX .... VDC**  
**AC/DC bridge rectifier (24, 48 or 60 V)**      **C3-G30BX .... VDC**




IEC 61810 EN 60947



Relay compatible with sockets:

S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO



Gap > 3 mm (1.7+1.7)



# C3-M10

Power relay, DC  
Single pole, magnetic blow out

**10 A 250 V AC1      10 A 220 V DC1**  
**3.6 A 110 V DC1      2 A 220 V DC1**

### Contacts


Materials: Standard, code 0 AgNi  
 Max. switching current 10 A  
 Max. peak inrush current (20 ms) 30 A  
 Max. switching voltage (pollution 3) 250 V  
 Max. switching voltage (pollution 2) 250 V  
 Max. AC load (Table 1) 2.5 KVA  
 Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
 Drop-out voltage ≥0.1 x U<sub>n</sub>  
 Nominal coil power 2.4 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	443	54
48	286	50	48	1K7	27
115	1K7	21	110	9K2	12
230	6K8	10	220	36K1	6


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

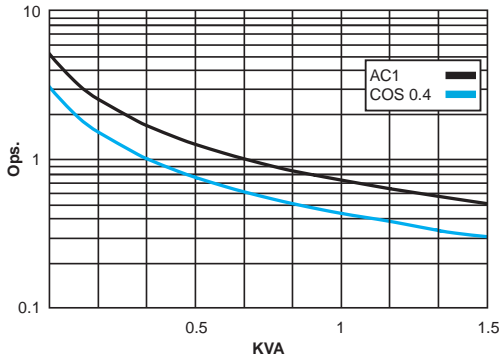

**Table 2** DC Voltage Endurance

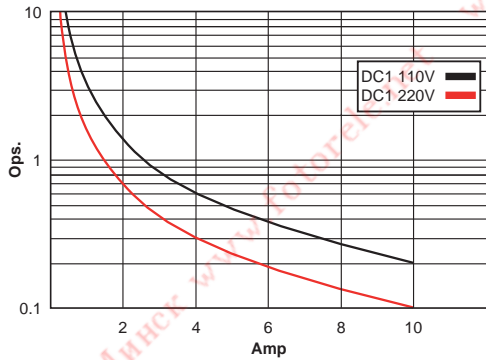

### Dimensions - mm

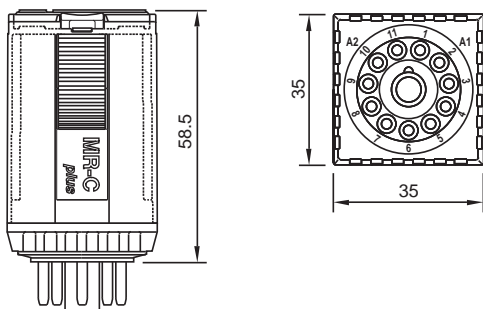

### Insulation

Dielectric strength (1 minute):  
 Open contacts 2.5 KV  
 Between contacts and coil 2.5 KV  
 Isolation resistance at 500 V ≥1 GΩ  
 Isolation, IEC 61810-5: 2.5 KV / 3

### Specifications

Nominal coil power 2.4 VA (AC), 1.3 W (DC)  
 Operate time 20 ms  
 Release time 10 ms  
 Isolation: EN60947 pollution 3, Gr C 250 V  
 Dielectric strength, contacts/coils 2.5 KV


### Standard Types (50/60 Hz and DC)

**AC 24, 48, 115, (120), 230**  
 X = LED (standard) **C3-M10X ..... VAC**  
 RC suppressor **C3-M10R ..... VAC**

**DC 24, 48, 110, 220**  
 X = LED, no polarity (standard) **C3-M10X ..... VDC**  
 Free-wheeling diode **C3-M10DX .... VDC**  
 Polarity and free-wheeling diodes **C3-M10FX .... VDC**  
 AC/DC bridge rectifier (24, 48 or 60 V) **C3-X10BX .... VDC**




IEC 61810 EN 60947



**Relay compatible with sockets:**

**S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO**



Gap > 3 mm (1.7+1.7)

# C3-X10



Power relay for DC applications  
Single pole, N.O., double make

**10 A 250 V AC1      7 A 110 V DC1**  
**10 A 30 V DC1      1.2 A 220 V DC1**

### Contacts


Materials: Standard, code 0 AgNi  
 Max. switching current 10 A  
 Max. peak inrush current (20 ms) 30 A  
 Max. switching voltage 250 V  
 Max. AC load (Table 1) 2.5 KVA  
 Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
 Drop-out voltage ≥0.1 x U<sub>n</sub>  
 Nominal coil power 2.4 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	443	54
48	286	50	48	1K7	27
115	1K7	21	110	9K2	12
230	6K8	10	220	36K1	6


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

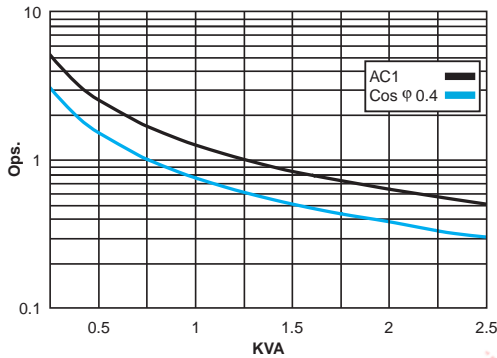

**Table 2** Max. DC Load

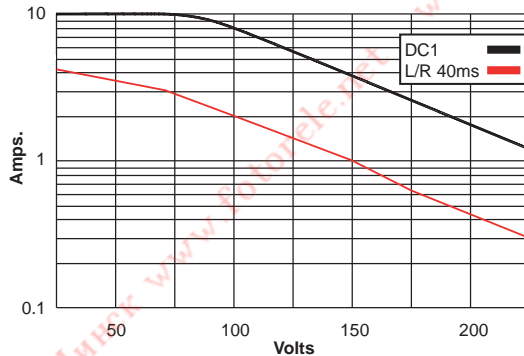

### Dimensions - mm

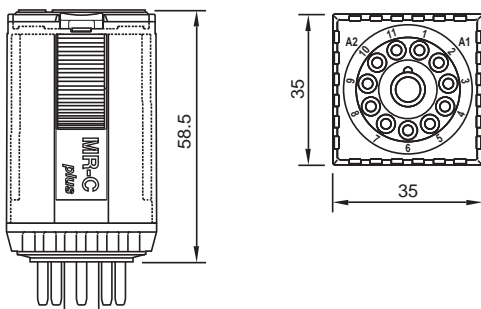

### Insulation

Dielectric strength (1 minute):  
 Open contacts 2.5 KV  
 Between contacts and coil 2.5 KV  
 Isolation resistance at 500 V ≥1 GΩ  
 Isolation, IEC 61810-5: 2.5 KV / 3

### Specifications

Operate time + bounce time 20 ms  
 Release time + bounce time 10 ms  
 Ambient temperature -40°C (no ice) to +70°C  
 Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
 Electrical life at nominal load ≥100,000 ops.  
 Operating frequency at nominal load 1,200/hour  
 Protection degree IP40 / RT1  
 Weight avg. 90 g

### Standard Types

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
 X = LED (standard) **C3-X10X.....VAC**  
 RC suppressor **C3-X10R.....VAC**

**DC 24, 48, 110, 220**  
 X = LED, no polarity (standard) **C3-X10X.....VDC**  
 Free-wheeling diode **C3-X10DX....VDC**  
 Polarity and free-wheeling diodes **C3-X10FX.....VDC**  
 AC/DC bridge rectifier (24, 48 or 60 V) **C3-X10BX....VDC**




IEC 61810 EN 60947




**Relay compatible with sockets:**


S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO

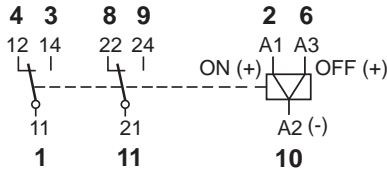


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

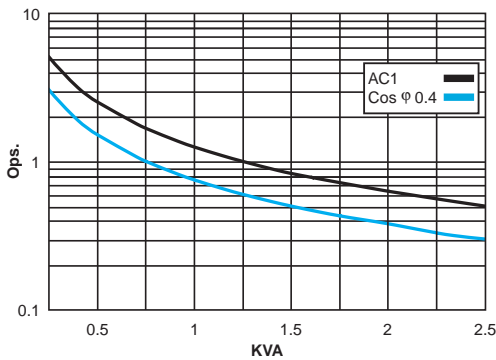

**Table 2** Max. DC Load

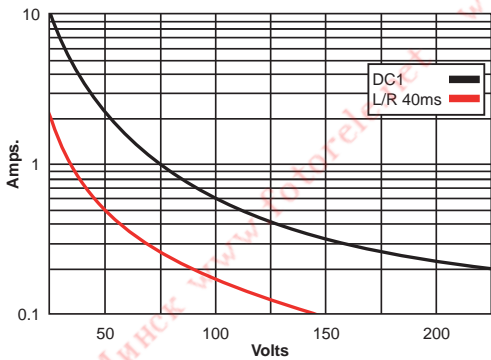

**Dimensions - mm**

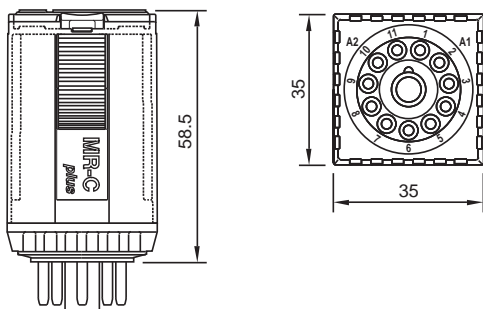

**C3-R20**



Magnetic latching  
Two change-over contacts

**10 A 250 V AC1      0.5 A 110 V DC1**  
**10 A 30 V DC1      0.2 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Optional, code 8 AgNi + 10μ Au  
Optional, code 9 AgNi + 0.2μ Au  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

**Coils**

ON pulse power 1.5 VA / W  
OFF pulse power 0.5 VA / W  
One winding for AC. Two winding for DC

VAC	ON mA	OFF mA	VDC	ON mA	OFF mA
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2.5	48	31	10
230	8	1.3	110	14	4.5

**Insulation**

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV / 3

**Specifications**

Minimum pulse length for ON / OFF 50 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 95 g

**Standard Types**

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
C3-R20 ..... VAC


DC 12, 24, 48, 110  
C3-R20 ..... VDC





**Relay compatible with sockets:**

S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO



# C3-E24



Sensible, 500 mW  
Two change-over contacts, 6 A  
Operating range: 0.8-1.7 x U<sub>n</sub>

**6 A 250 V AC1 6 A 30 V DC1**

### Contacts


Materials: Standard, code 4 AgNi + 0.2μ Au  
Optional, code 8 AgNi + 10μ Au  
Max. switching current 6 A  
Max. peak inrush current (20 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 1.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 500 mW

VDC	Ω	mA
24	1K1	21
48	4K6	10
60	7K2	8.3
110	24K2	4.5


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

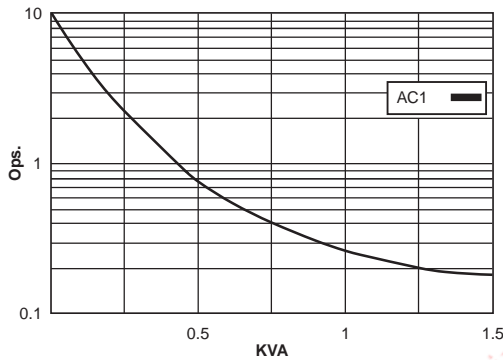

**Table 2** Max. DC Load

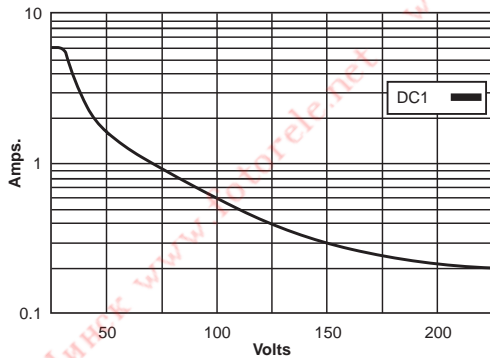

### Dimensions - mm

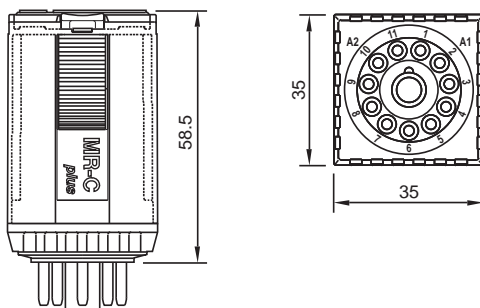

### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV/3

### Specifications

Operate time + bounce time 18 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +60°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

### Standard Types


DC 12, 24, 48, 60, 110  
C3-E24 ..... VDC  
Free-wheeling diode C3-E24D ..... VDC  
Polarity and free-wheeling diodes C3-E24F ..... VDC

Connecting diodes to the coil will increase the release time.  
LED available upon request.



**Relay compatible with sockets:**

S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO

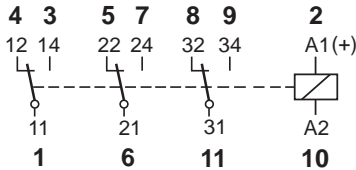

# C3-N34



Sensitive, 800 mW  
Three change-over contacts, 6 A  
Operating range: 0.8-1.4 x  $U_N$

**6 A 250 V AC1 6 A 30 V DC1**

### Contacts


Materials: Standard, code 4 AgNi + 0,2 $\mu$  Au  
Optional, code 8 AgNi + 10 $\mu$  Au  
Max. switching current 6 A  
Max. peak inrush current (20 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 1.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms $\pm 10\%$ @ 20°C)


Pull-in voltage  $\leq 0.8 \times U_N$   
Drop-out voltage  $\geq 0.1 \times U_N$   
Nominal coil power 800 mW

VDC	$\Omega$	mA
24	720	33
48	2K8	17
60	4K5	13
110	15K	7


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

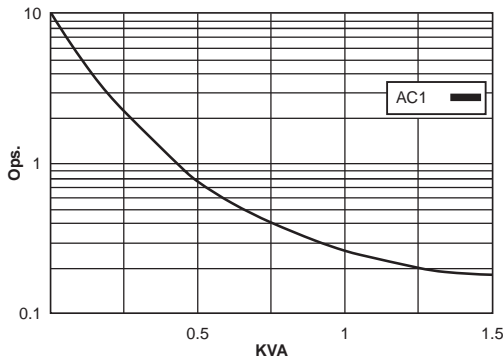

**Table 2** Max. DC Load

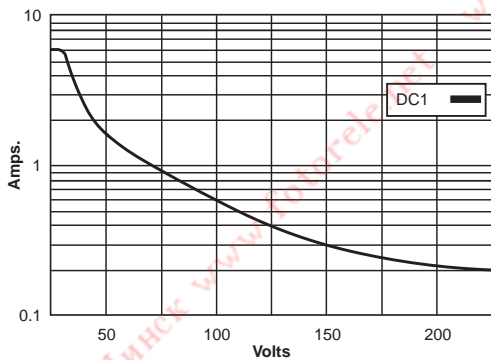

### Dimensions - mm

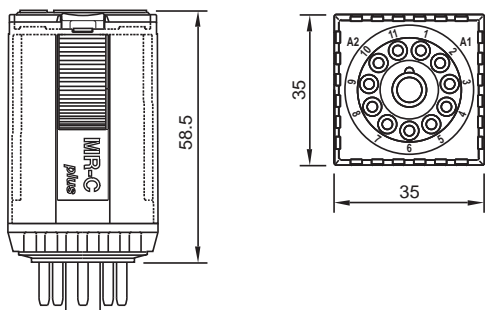

### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 K  
Isolation resistance at 500 V  $\geq 3 \text{ G}\Omega$   
Isolation, IEC 61810-5: 2.5 KV / 3

### Specifications

Operate time + bounce time 18 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +60°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load  $\geq 100,000$  ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

### Standard Types


DC 24, 48, 60, 110 **C3-N34 ..... VAC**  
Free-wheeling diode **C3-N34D ..... VDC**  
Polarity and free-wheeling diodes **C3-N34F ..... VDC**

Connecting diodes to the coil will increase the release time.  
LED available upon request.



**Relay compatible with sockets:**

**S3-B, S3-S, S3-MP, S3-MS, S3-L, S3-PO**

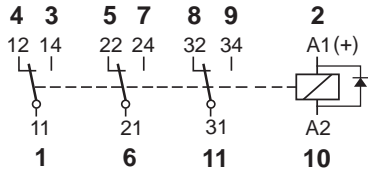

# R3-N30D




Railway Application Relay  
According to EN 60077-1-2/99  
EN 61373/99

**6 A 250 V AC1 6 A 30 V DC1**


### Contacts

Materials: Standard, code 0 AgNi  
Optional, code 4 AgNi + 0.2μ Au  
Optional, code 8 AgNi + 10μ Au  
Max. switching current 6 A  
Max. peak inrush current (20 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1)  
Max. DC load (Table 2)


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

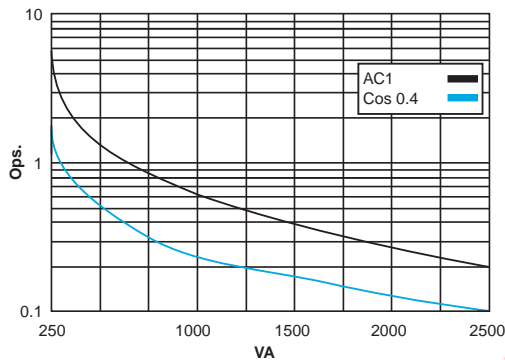

**Table 2** Electrical Life, ops. x 10<sup>6</sup>

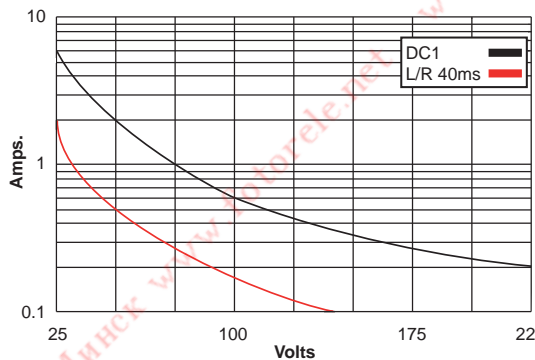

### Dimensions - mm

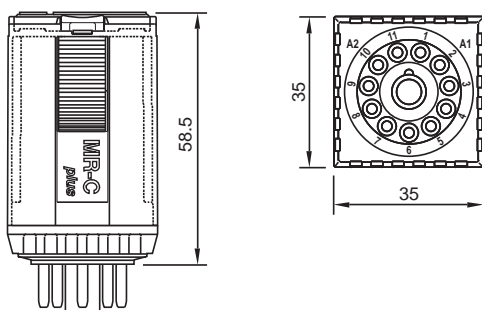

### Coils

Operation Range 0.7 U<sub>n</sub> @ 1.25 U<sub>n</sub>  
Power Consumption 1.07 W  
Generated transients V, include FWD

Voltage	Ω ± 10%	mA
24	525	46
48	2133	22
72	4844	15
110	12900	9

### Isolation

Pollution grade PD3  
With voltage (1.2/50μs) / Dielectric strength (1 minute):  
Contact coil 4 KV/2220 V  
Between different poles 4 KV/2220 V  
Between contacts on same pole 1550 KV/850 V

### Specifications

Max working temperature 40°C  
Number of mechanical operations >10 million  
Thermic Class B (130°C)  
Vibration: Category/Class 1/B Body Mounted  
Vibration 5-150 Hz (3 axes)  
Shock 5 g (3 axes)  
Operation (UN)/release time 18 ms/35 ms  
Weight avg. 95 g  
Weight avg. Relay + Socket 150 g  
Relay Protection IP 40

### Standard Types

**DC 24, 48, 72, 110**


**X = LED**  
Free-wheeling diode  
LED and free-wheeling diode

**R3-N30..... VDC**  
**R3-N30X..... VDC**  
**R3-N30D..... VDC**  
**R3-N30DX.... VDC**





Relay compatible with sockets:  
S4-B, S4-L, S4-P, S4-PO

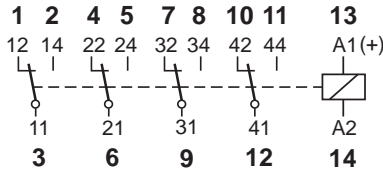

# C4-A40



General purpose  
Four change-over contacts


**10 A 250 V AC1      0.5 A 110 V DC1**  
**6 A 30 V DC1        0.2 A 220 V DC1**

### Contacts


Materials: Standard, code 0      AgNi  
Optional, code 8      AgNi + 10μ Au  
Optional, code 9      AgNi + 0.2μ Au

Max. switching current      10 A  
Max. peak inrush current (20 ms)      30 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      2.5 KVA  
Max. DC load (Table 2)


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

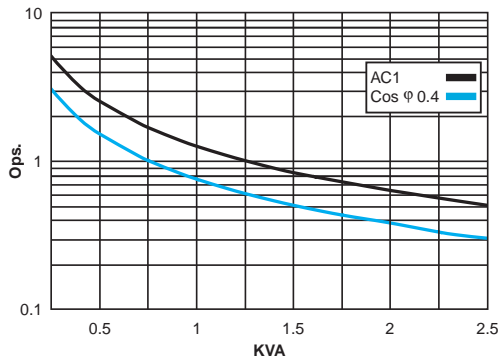

**Table 2** Max. DC Load

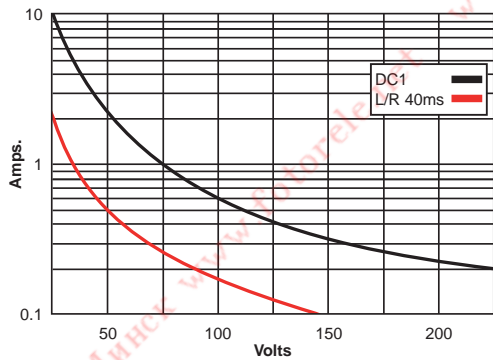

### Dimensions - mm

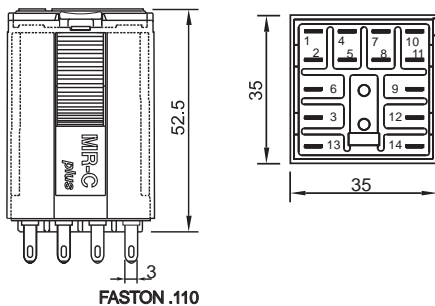

### Coils (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      2.4 VA (AC)/1.4 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	414	58
48	286	50	48	1K6	30
115	1K7	21	110	8K1	13
230	6K8	10	220	35K7	6.2

### Insulation

Dielectric strength (1 minute): Open contacts      1,000 V  
Between adjacent poles      2.5 KV  
Between contacts and coil      2.5 KV  
Isolation resistance at 500 V      ≥1 GΩ  
Isolation, IEC 61810-5:      2.5 KV / 3

### Specifications

Operate time + bounce time      20 ms  
Release time + bounce time      8 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops.      10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection degree      IP 40/RT1  
Weight avg.      90 g

### Standard Types


AC 50 Hz, (60 Hz): **24, 48, 115, (120), 230, (240)**  
X = LED (standard)      **C4-A40X..... VAC**  
RC suppressor      **C4-A40R..... VAC**

DC 24, 48, 110, 220  
X = LED no polarity (standard)      **C4-A40X..... VDC**  
Free-wheeling diode      **C4-A40DX .... VDC**  
Polarity and free-wheeling diodes      **C4-A40FX..... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V)      **C4-A40BX .... VDC**



**Relay compatible with sockets:**

S4-B, S4-L, S4-P, S4-PO

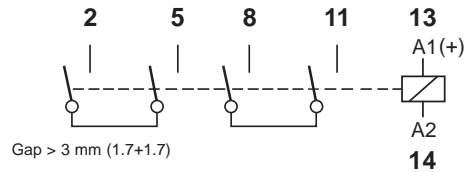

# C4-X20



Power relay, DC applications  
Two pole, N.O., double make

**10 A 250 V AC1 7 A @ 110 V DC1**  
**10 A 30 V DC1 1.2 A @ 220 V DC1**

**Contacts**


Materials:	Standard, code 0	AgNi
Max. switching current		10 A
Max. peak inrush current (20 ms)		30 A
Max. switching voltage		250 V
Max. AC load (Table 1)		0.5 KVA
Max. DC load (Table 2)		

**Coils** (Ohms  $\pm 10\%$  @ 20°)


Pull-in voltage	$\leq 0.8 \times U_n$
Drop-out voltage	$\geq 0.1 \times U_n$
Nominal coil power	2.4 VA (AC)/1.3 W (DC)

VAC	$\Omega$	mA	VDC	$\Omega$	mA
24	65	100	24	443	54
48	286	50	48	1K8	27
115	1K7	21	110	9K2	12
230	6K8	10	220	36K1	6


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

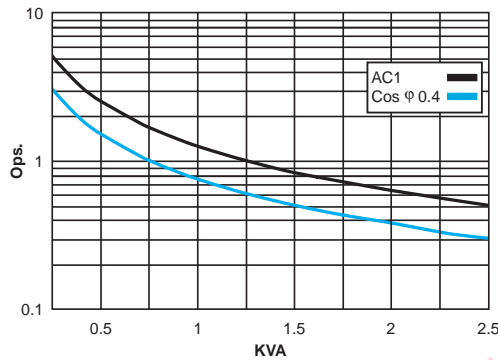

**Table 2** Max. DC Load

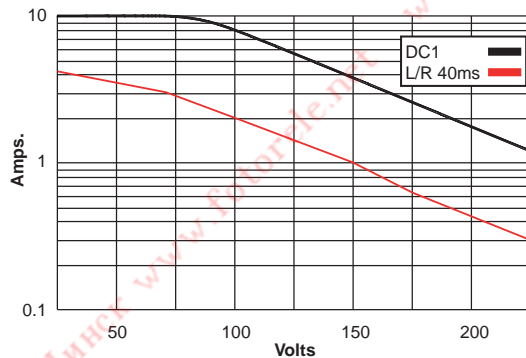

**Dimensions - mm**

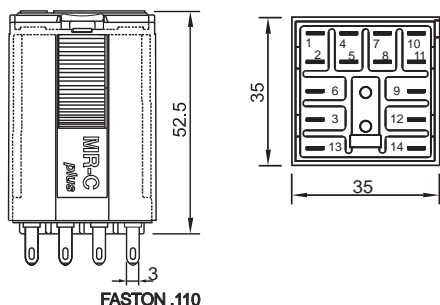

**Insulation**

Dielectric strength (1 minute): Open contacts	2,500 V
Between adjacent poles	2.5 KV
Between contacts and coil	2.5 KV
Isolation resistance at 500 V	$\leq 1 \text{ G}\Omega$
Isolation, IEC 61810-5:	2.5 KV/3

**Specifications**

Operate time + bounce time	20 ms
Release time + bounce time	8 ms
Ambient temperature	-40°C (no ice) to +70°C
Mechanical life ops.	10 Mill. AC, 20 Mill. DC relays
Electrical life at nominal load	$\geq 100,000$ ops.
Operating frequency at nominal load	1,200/hour
Protection degree	IP 40/RT1
Weight avg.	90 g

**Standard Types**


<b>AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)</b>	
X = LED (standard)	<b>C4-X20X.....VAC</b>
RC suppressor	<b>C4-X20R.....VAC</b>
<b>DC 24, 48, 110, 220</b>	
X = LED no polarity (standard)	<b>C4-X20X.....VDC</b>
Free-wheeling diode	<b>C4-X20DX....VDC</b>
Polarity and free-wheeling diodes	<b>C4-X20FX.....VDC</b>
AC/DC bridge rectifier (24, 48 or 60 V)	<b>C4-X20BX....VDC</b>




IEC 61810 EN 60947




Relay compatible with sockets:  
S4-B, S4-L, S4-P, S4-PO

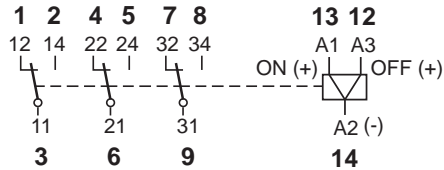


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

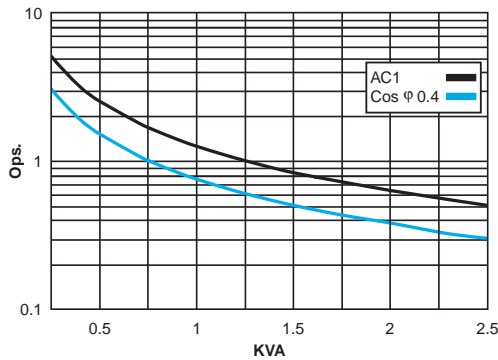

**Table 2** Max. DC Load

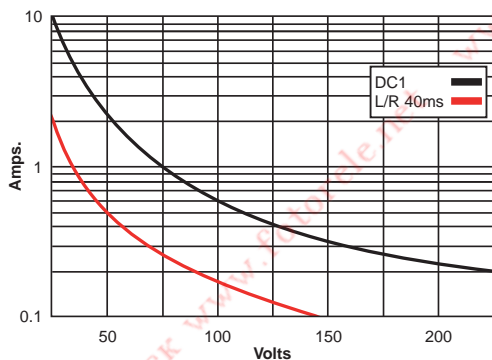

**Dimensions - mm**

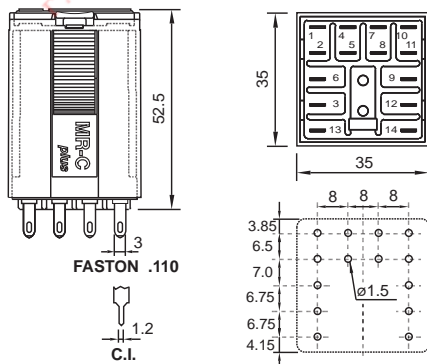

**C4-R30**



Magnetic latching relay  
Three change-over contacts, 10 A

**10 A 250 V AC1**      **0.5 A 110 V DC1**  
**10 A 10 V DC1**      **0.2 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Optional, code 8 AgNi + 10μAu  
Optional, code 9 AgNi + 0.2μ Au  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

**Coils**

ON pulse power 1.5 VA / W  
OFF pulse power 0.5 VA / W  
One winding for AC, Two windings for DC

VAC	ON mA	OFF mA	VDC	ON mA	OFF mA
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2.5	48	31	10
230	8	1.3	110	14	4.5

**Insulation**

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV / 3

**Specifications**

Minimum, pulse length for ON / OFF 50 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 95 g


**Standard Types**

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
C4-R30 ..... VAC

DC 12, 24, 48, 110  
C4-R30 ..... VDC



**Relay compatible with sockets:**  
S5-S, S5-L, S5-P, S5-PO



# C5-A20




General purpose  
Two change-over contacts

**16 A 400 V AC1      0.5 A 110 V DC1**  
**16 A 30 V DC1        0.2 A 220 V DC1**

### Contacts

Materials: Standard, code 0 AgNi  
Optional, code 8 AgNi + 10µAu  
Optional, code 9 AgNi + 0.2µAu  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 400 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)

**Table 1** Electrical Life, ops. x 10<sup>6</sup>

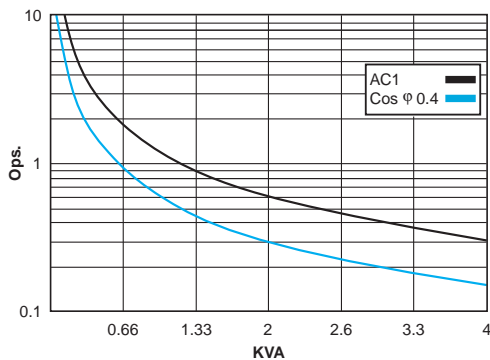


### Coils (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (AC)/1.4 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	414	58
48	286	50	48	1K6	30
115	1K7	21	110	8K1	13
230	6K8	10	220	35K6	6
400	18K8	6			

**Table 2** Max. DC Load

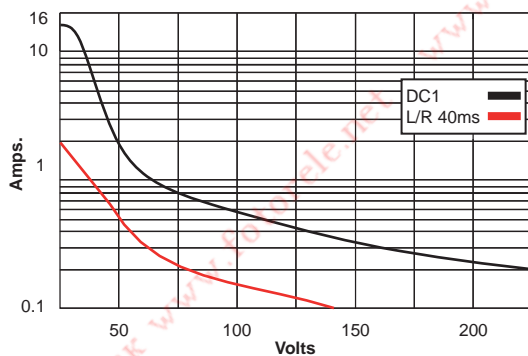


### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 4 KV  
Between contacts and coil 4 KV  
Isolation resistance at 500 V ≥3 GΩ  
Isolation, IEC 61810-5: 4 KV/3

### Specifications

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

### Dimensions - mm

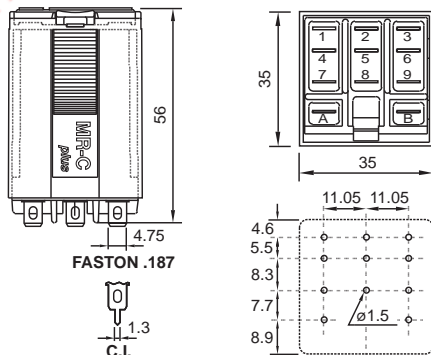


### Standard Types

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240), 400**  
X = LED (standard) C5-A20X.....VAC  
RC suppressor C5-A20R.....VAC


### DC 24, 48, 110, 220

X = LED, no polarity (standard) C5-A20X..... VDC  
Free-wheeling diode C3-A20DX .... VDC  
Polarity and free-wheeling diodes C5-A20FX..... VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C5-A20BX .... VDC







Relay compatible with sockets:  
S5-S, S5-L, S5-P, S5-PO

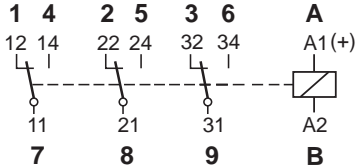


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

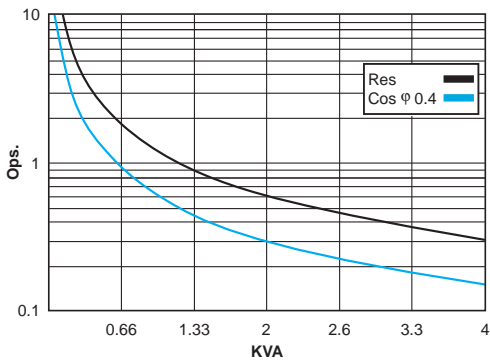

**Table 2** Max. DC Load

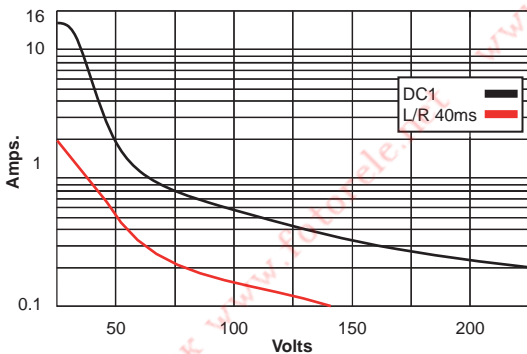

**Dimensions - mm**

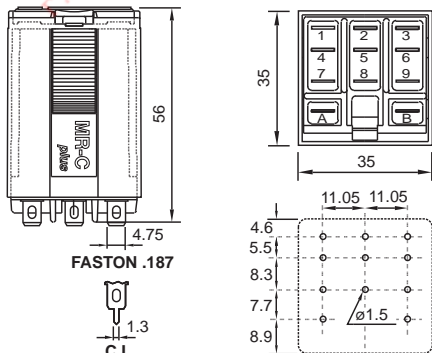

**C5-A30**



General purpose  
Three change-over contacts

**16 A 400 V AC1      0.5 A 110 V DC1**  
**16 A 30 V DC1      0.2 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 400 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (AC)/1.4 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	24	414	58
48	286	50	48	1K6	30
115	1K7	21	110	8K1	13
230	6K8	10	220	35K6	6.5
400	18K8	6			

**Insulation**

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 4 KV  
Between contacts and coil 4 KV  
Isolation resistance at 500 V ≥3G Ω  
Isolation, IEC 61810-5: 4 KV/3

**Specifications**

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 95 g

**Standard Types**


**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C5-A30X.....VAC**  
RC suppressor **C5-A30R.....VAC**

**DC 24, 48, 110, 220**  
X = LED, no polarity (standard) **C5-A30X.....VDC**  
Free-wheeling diode **C3-A30DX....VDC**  
Polarity and free-wheeling diodes **C5-A30FX.....VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C5-A30BX....VDC**







**Relay compatible with sockets:**  
S5-S, S5-L, S5-P, S5-PO

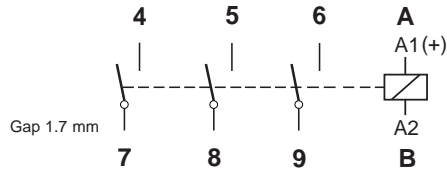


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

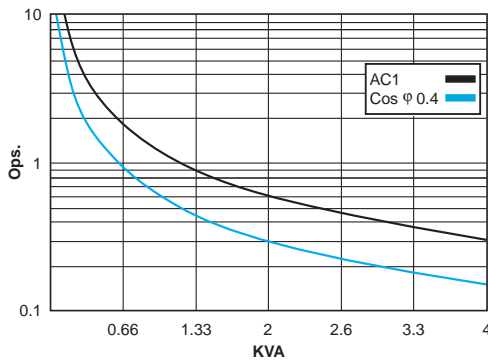

**Table 2** Max. DC Load

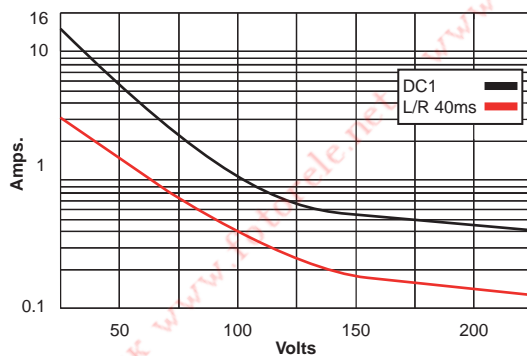

**Dimensions - mm**

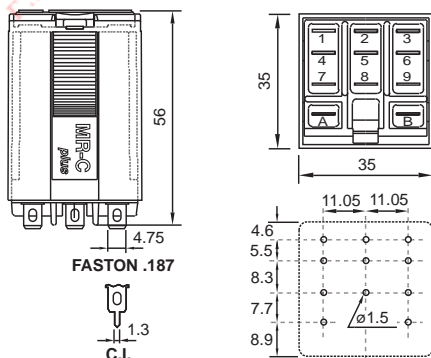

**C5-G30**



General purpose, DC applications  
Three open contacts

**16 A 400 V AC1**      **1.2 A 110 V DC1**  
**16 A 30 V DC1**      **0.4 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 400 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (AC)/1.6 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	90	133
48	286	50	24	360	66
115	1K7	21	48	1K4	34
230	6K8	10	110	7K6	15
400	18K8	6	220	30K3	7.5

**Insulation**

Dielectric strength (1 minute): Open contacts ≥2,000 V  
Between adjacent poles 4 KV  
Between contacts and coil 4 KV  
Isolation resistance at 500 V ≥3 GΩ  
Isolation, IEC 61810-5: 4 KV/3

**Specifications**

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 95 g


**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C5-G30X.....VAC**  
RC suppressor **C5-G30R .....VAC**

**DC 24, 48, 110, 220**  
X = LED, no polarity (standard) **C5-G30X..... VDC**  
Free-wheeling diode **C3-G30DX .... VDC**  
Polarity and free-wheeling diodes **C5-G30FX .... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C5-G30BX .... VDC**



**Relay compatible with sockets:**  
S5-S, S5-L, S5-P, S5-PO



# C5-X10


Power relay, DC applications  
Single pole, N.O., double make

**16 A 400 V AC1      7 A 110 V DC1**  
**16 A 30 V DC1      1.2 A 220 V DC1**


### Contacts

Materials: Standard, code 0 AgNi  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 400 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

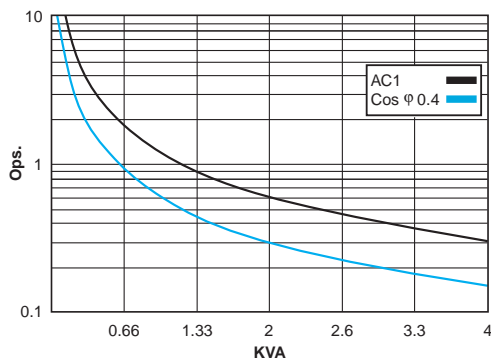

**Table 2** Max. DC Load

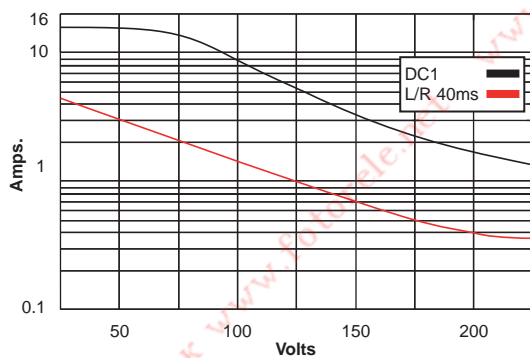

### Dimensions - mm

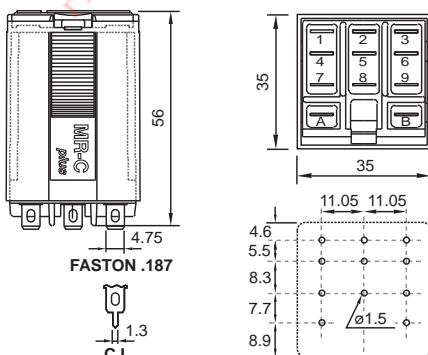

### Coils (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	110	108
48	286	50	48	443	54
115	1K7	21	48	1K7	27
230	6K8	10	110	9K2	12
400	18K8	6	220	34K5	6.5

### Insulation

Dielectric strength (1 minute):  
Between adjacent poles 4 KV  
Between contacts and coil 4 KV  
Isolation resistance at 500 V ≥3 GΩ  
Isolation, IEC 61810-5: 4 KV/3

### Specifications

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g


### Standard Types

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard) C5-X10X.....VAC  
RC suppressor C5-X10R.....VAC  
DC 24, 48, 110, 220  
X = LED, no polarity (standard) C5-X10X.....VDC  
Free-wheeling diode C5-X10DX.....VDC  
Polarity and free-wheeling diodes C5-X10FX.....VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C5-X10BX.....VDC





**Relay compatible with sockets:**  
S5-S, S5-L, S5-P, S5-PO



# C5-M10



DC power relay  
One N.O. pole, magnetic blow out

**16 A 400 V AC1 10 A 220 V DC1**  
**3.6 A 110V DC Ind 2 A 220V DC Ind**

### Contacts


Materials: Standard, code 0 AgNi  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 400 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage  $\leq 0.8 \times U_n$   
Drop-out voltage  $\geq 0.1 \times U_n$   
Nominal coil power 2.4 VA (AC)/1.3 W (DC)

VAC	$\Omega$	mA	VDC	$\Omega$	mA
24	65	100	12	110	108
48	286	50	48	443	54
115	1K7	21	48	1K7	27
230	6K8	10	110	9K2	12
400	18K8	6	220	34K5	6.5

**Table 1** Electrical Life, ops. x 10<sup>6</sup>

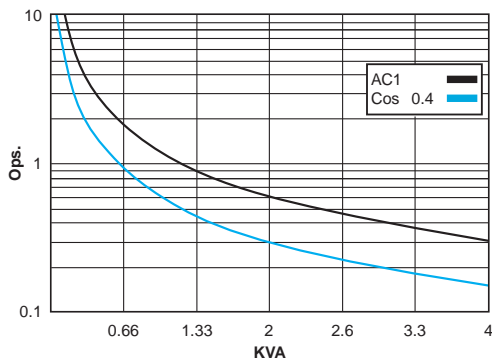

**Table 2** DC Voltage Endurance

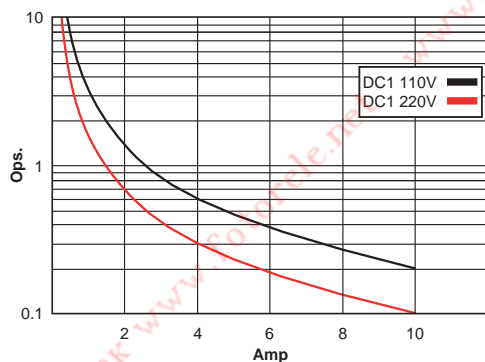


### Insulation

Dielectric strength (1 minute):  
Open contacts 4,000 V  
Between contacts and coil 4 KV  
Isolation resistance at 500 V  $\geq 3 \text{ G}\Omega$   
Isolation, EN 60947/IEC 61810-5: 4 KV/3

### Specifications

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC relays, 20 Mill. DC relays  
Electrical life at nominal load  $\geq 100,000$  ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g

### Dimensions - mm

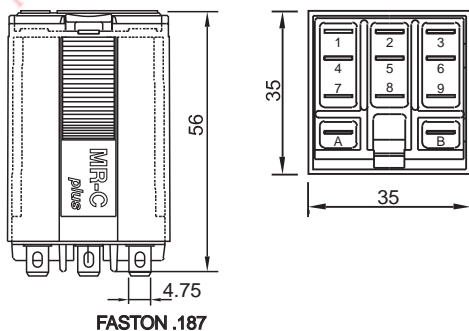


### Standard Types (50 / 60 Hz and CC)

**AC 24, 48, 115, (110 - 120), 230**  
X = LED (standard) C5-M10X .....VAC  
RC suppressor C5-M10R .....VAC


**DC 12, 24, 48, 110, 120/125,220**  
X = LED C5-M10X ..... VDC  
Free-wheeling diodes C5-M10DX.... VDC  
Polarity and free-wheeling diodes C5-M10FX .... VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C5-M10BX.... VDC




Relay compatible with sockets:  
S5-S, S5-L, S5-P, S5-PO




**Table 1** Electrical Life, ops. x 10<sup>6</sup>

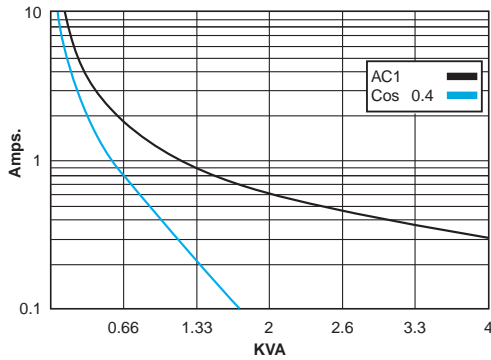

**Table 2** Max. DC Load

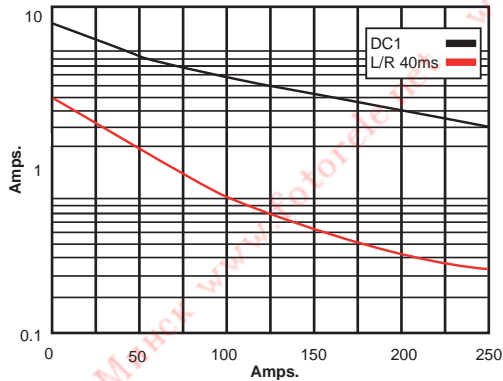

**Dimensions - mm**

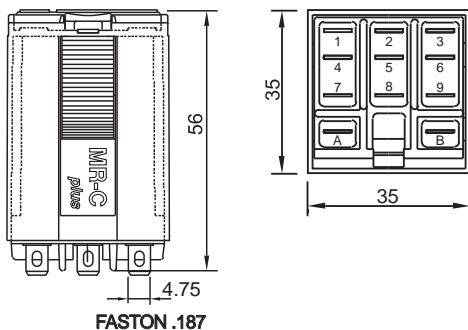

**C5-M20**



Power relay, DC  
Double pole, N.O., magnetic blow out

**16 A 250 V AC1      7 A 110 V DC1**  
**3 A 220 V DC1**

**Contacts**

Materials: Standard, code 0 AgNi  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage 0.8 x U<sub>n</sub>  
Drop-out voltage 0.1 x U<sub>n</sub>  
Nominal coil power 2.4 VA (CA) / 1.6 W (CC)

VAC	Ω	mA	VDC	Ω	mA
24	65	100	12	90	133
48	286	50	24	373	66
115	1K7	21	48	1K4	33
230	6K8	10.4	110	7K6	15

**Insulation**

Dielectric strength (1 minute):  
Open contacts 2 KV  
Between adjacent poles 4 KV  
Between contacts and coil 3 KV  
Isolation resistance at 500 V ≥3 GΩ  
Isolation, EN 60947/IEC 61810-5: 4 KV/3

**Specifications**

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥75,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 90 g


**Standard Types** (50 / 60 Hz and CC)

**AC 24, 48, 115, (120), 230 (240)**  
X = LED (standard) **C5-M20X ..... VAC**  
RC suppressor **C5-M20R ..... VAC**

**DC 12, 24, 48, 110, 120/125, 220**  
X = LED **C5-M20X ..... VCC**  
Free-wheeling diodes **C5-M20DX.... VCC**  
Polarity and free-wheeling diodes **C5-M20FX .... VCC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C5-M20BX.... VCC**



**Relay compatible with sockets:**  
S5-S, S5-L, S5-P, S5-PO

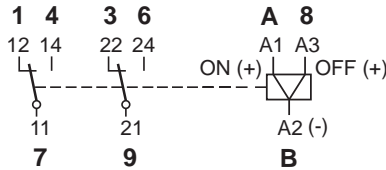

# C5-R20




Magnetic latching relay  
Two Change-over contacts, 10 A

**10 A 400 V AC1      10 A 30 V DC1**  
**0.2 A 220 V DC1      0.5 A 110 V DC1**


### Contacts

Materials: Standard, code 0 AgNi  
 Max. switching current 10 A  
 Max. peak inrush current (20 ms) 30 A  
 Max. switching voltage 400 V  
 Max. AC load (Table 1) 4 KVA  
 Max. DC load (Table 2)


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

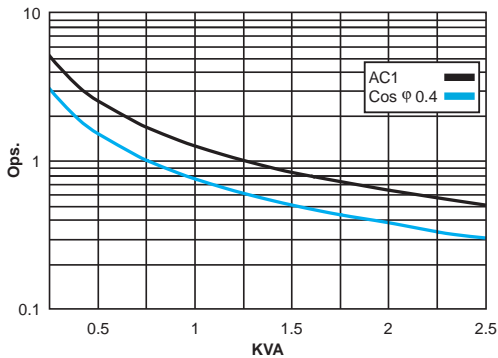

**Table 2** Max. DC Load

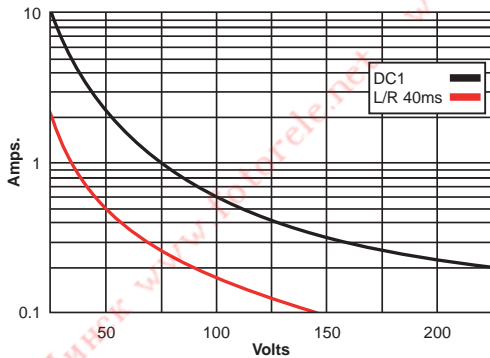

### Dimensions - mm

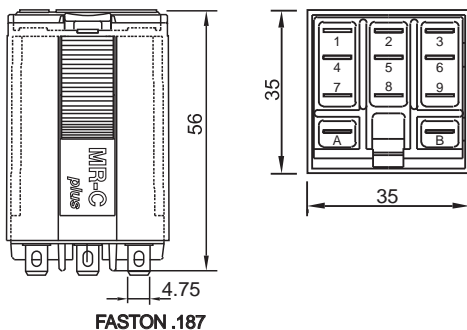

### Coils (Ohms ±10% @ 20°C)

ON pulse power 1.5 VA/W  
 OFF pulse power 0.5 VA/W  
 One winding for AC, two windings for DC

VAC	ON mA	OFF mA	VDC	ON mA	OFF mA
24	75	12	12	125	41
48	38	6	24	63	21
115	16	2.5	48	31	10
230	8	1.3	110	14	4.5

### Insulation

Dielectric strength (1 minute):  
 Open contacts 1,000 V  
 Between adjacent poles 4 KV  
 Between contacts and coil 4 KV  
 Isolation resistance at 500 V ≥3 GΩ  
 Isolation, EN 60947/IEC 61810-5: 4 KV/3

### Specifications

Minimum, pulse length for ON / OFF 50 ms  
 Ambient temperature -40°C (no ice) to +70°C  
 Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
 Electrical life at nominal load ≥100,000 ops.  
 Operating frequency at nominal load 1,200/hour  
 Protection degree IP 40/RT1  
 Weight avg. 95 g

### Standard Types

AC 50 Hz, (60 Hz): **24, 48, 115, (110-120), 230, (240)**  
**C5-R20 ..... VAC**  
  
 DC 12, 24, 48, 110  
**C5-R20 ..... VDC**



IEC 61810



Relay compatible with sockets:

S7-16




Table 1 Electrical Life, ops. x 10<sup>6</sup>



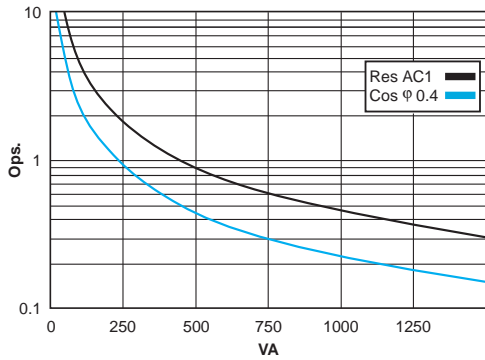


Table 2 Max. DC Load

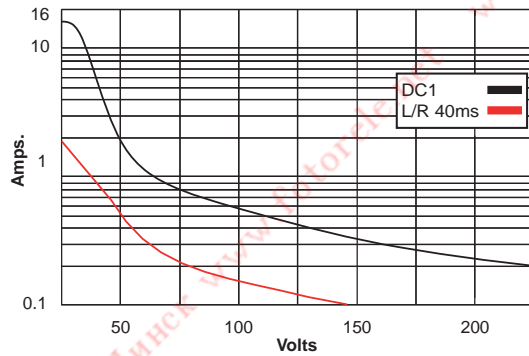

Dimensions - mm

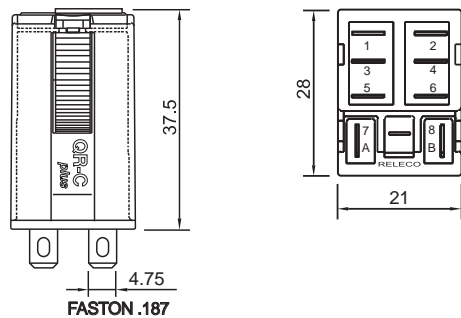

C7-A10



General purpose

One change-over contact, 16 A

16 A 250 V AC1      0.5 A 110 V DC1  
16 A 30 V DC1      0.2 A 220 V DC1

Contacts

Materials: Standard, code 0 AgNi  
Max. switching current 16 A  
Max. peak inrush current (20 ms) 40 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 4 KVA  
Max. DC load (Table 2)  
Only plug-in S7-16 socket

Coils (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 1.2 VA (AC)/1.3 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	111	108
48	686	25	24	432	55
115	4K3	10.4	48	1K7	28
230	18K6	5.2	110	9K2	12

Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV/3

Specifications

Operate time + bounce time 16 ms  
Release time + bounce time 8 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 43 g


Standard Types

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard) C7-A10X.....VAC

DC 12, 24, 48, 110,  
X = LED, no polarity (standard) C7-A10X.....VDC  
Free-wheeling diode C7-A10DX ....VDC  
Polarity and free-wheeling diodes C7-A10FX.....VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C7-A10BX ....VDC




IEC 61810 EN 60947

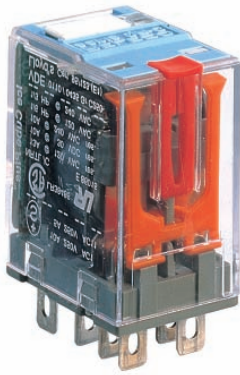

**Relay compatible with sockets:**

**S7-M, S7-L, S7-P, S7-PO, S7-PI**



# C7-A20



General purpose  
Two pole, change-over contacts

**10 A 250 V AC1      0.5 A 110 V DC1**  
**10 A 30 V DC1      0.2 A 220 V DC1**

### Contacts

Materials: Standard, code 0 AgNi  
Optional, code 8 AgNi + 10μ Au  
Optional, code 9 AgNi + 0.2μ Au


Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 1.2 VA (AC)/1 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	85
48	686	25	24	594	43
115	4K3	10.4	48	2k3	21
230	18K6	5.2	110	11K4	11


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

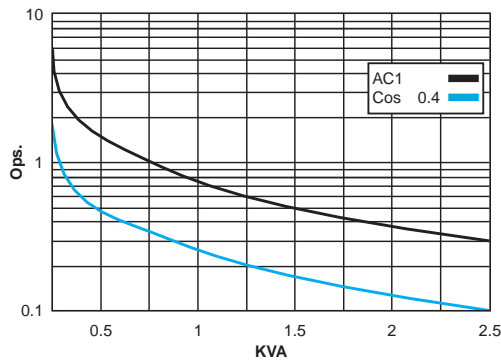

**Table 2** Max. DC Load

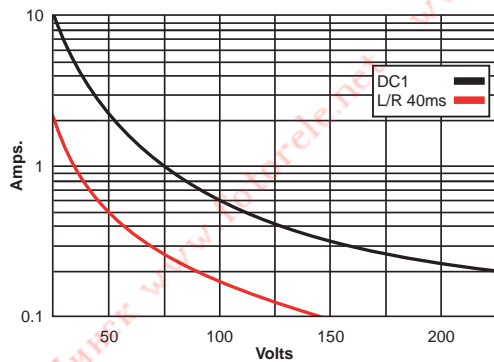

### Dimensions - mm

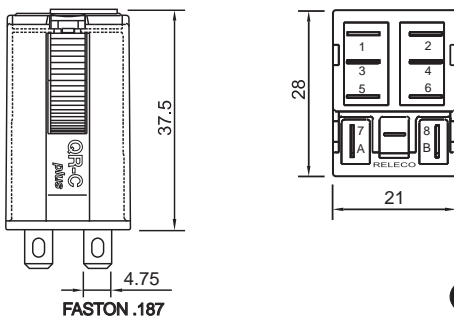

### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV/3

### Specifications

Operate time + bounce time 16 ms  
Release time + bounce time 8 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 43 g

### Standard Types


**AC 50 Hz, (60 Hz): 24, 48, 72, 115, (120), 230, (240)**  
**X = LED (standard)      C7-A20X.....VAC**

**DC 12, 24, 48, 72, 110,**  
**X = LED, no polarity (standard)      C7-A20X..... VDC**  
**Free-wheeling diode      C7-A20DX .... VDC**  
**Polarity and free-wheeling diodes      C7-A20FX..... VDC**  
**AC/DC bridge rectifier (24, 48 or 60 V)      C7-A20BX .... VDC**



**Relay compatible with sockets:**

**S7-M, S7-L, S7-P, S7-PO, S7-PI**



# C7-A20E



General purpose  
Two pole

**10 A 250 V AC1      0.5 A 110 V DC1**  
**10 A 30 V DC1      0.2 A 220 V DC1**

### Contacts

Materials: Standard, code 0      AgNi  
Optional, code 8      AgNi + 10µ Au  
Optional, code 9      AgNi + 0.2µ Au


Max. switching current      10 A  
Max. peak inrush current (20 ms)      30 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      2.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      1.2 VA (AC)/1 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	85
48	686	25	24	594	43
115	4K3	10.4	48	2K3	21
230	18K6	5.2	110	11K4	11

**Table 1** Electrical Life, ops. x 10<sup>6</sup>

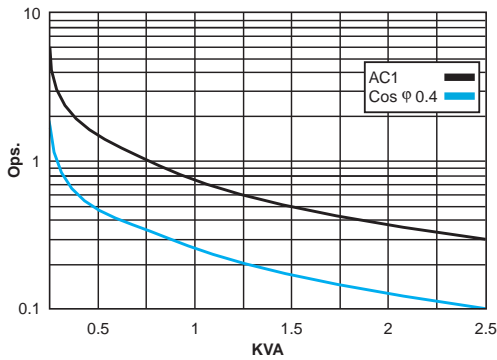

**Table 2** Max. DC Load

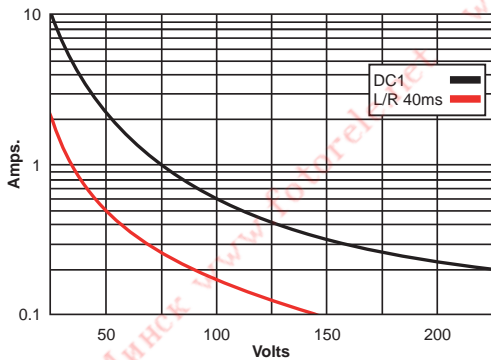


### Insulation

Dielectric strength (1 minute): Open contacts      1,000 V  
Between adjacent poles      2.5 KV  
Between contacts and coil      2.5 KV  
Isolation resistance at 500 V      ≥3 GΩ  
Isolation, IEC 61810-5:      2.5 KV/3

### Specifications

Operate time + bounce time      16 ms  
Release time + bounce time      8 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops.      10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection degree      IP 40/RT1  
Weight avg.      43 g

### Dimensions - mm

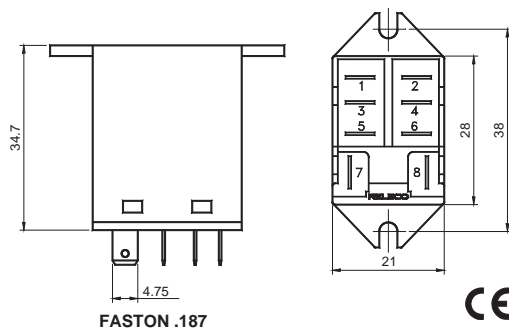


### Standard Types

AC 50 Hz, (60 Hz): **24, 48, 115, (120), 230, (240)**  
**C7-A20E.....VAC**


DC 12, 24, 48, 110  
**C7-A20E.....VDC**





Relay compatible with sockets:

S7-M, S7-L, S7-P, S7-PO, S7-I/O



# C7-T21

Low level  
Two change-over bifurcated contacts

**6 A 250 V Res 6 A 30 V DC1**  
**Min. contacts load: 1 mA / 5 V DC1**

### Contacts


Materials: Standard, code 1 AgNi + 0.3μ Au  
Optional, code 2 AgNi + 10μ Au  
Max. switching current 6 A  
Max. peak inrush current (20 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 1.2 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 1.2 VA (AC)/1 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	85
48	686	25	24	594	43
115	4K3	10.4	48	2K3	21
230	18K6	5.2	110	11K4	11


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

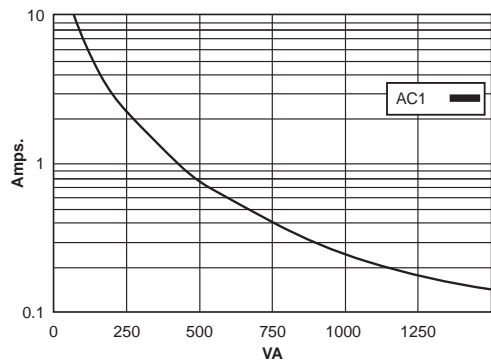

**Table 2** Max. DC Load

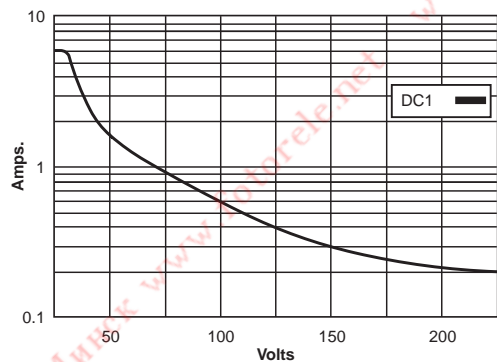

### Dimensions - mm

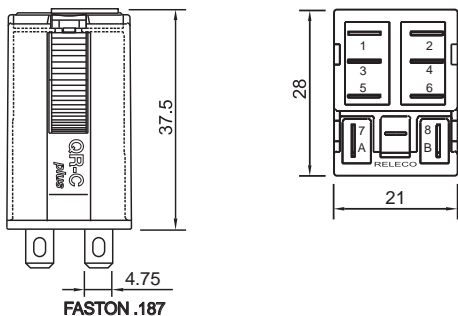

### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV/3

### Specifications

Operate time + bounce time 16 ms  
Release time + bounce time 8 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 43 g

### Standard Types


AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard) C7-T21X .....VAC

DC 12, 24, 48, 110  
X = LED, no polarity (standard) C7-T21X ..... VDC  
Free-wheeling diode C7-T21DX..... VDC  
Polarity and free-wheeling diodes C7-T21FX..... VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C7-T21BX..... VDC



Relay compatible with sockets:

S7-M, S7-L, S7-P, S7-PO, S7-I/O



# C7-G20

Power relay, DC application  
Two open contacts, Gap 1.5 mm

**10 A 250 V AC1      0.8 A 110 V DC1**  
**10A 30 V DC1      0.4 A 220 V DC1**

### Contacts


Materials: Standard, code 0 AgNi  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 1.5 VA (AC)/1.5 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	153	62	12	99	121
48	611	31	24	388	61
115	3K6	13	48	1K5	32
230	14K6	6.5	110	8K	14

**Table 1** Electrical Life, ops. x 10<sup>6</sup>

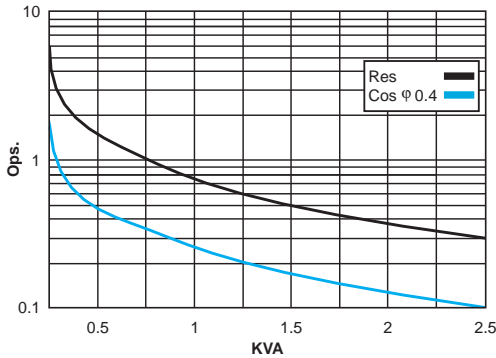

**Table 2** Max. DC Load

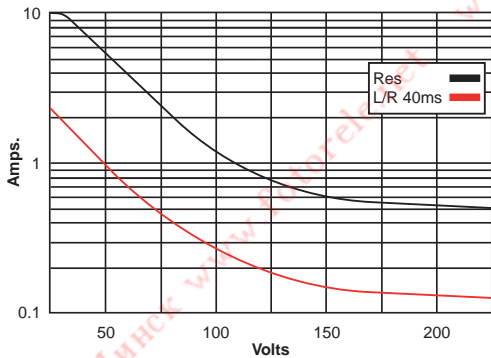


### Insulation

Dielectric strength (1 minute): Open contacts 2,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV/3

### Specifications

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 43 g

### Dimensions - mm

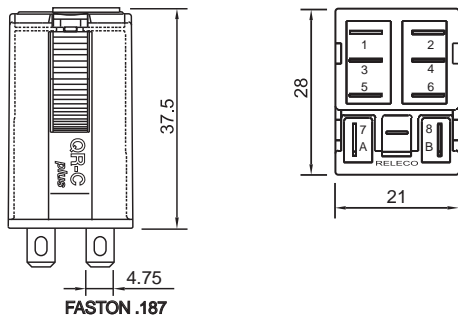

### Standard Types


AC 50 Hz, (60 Hz): **24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C7-G20X.....VAC**

DC 12, 24, 48, 110  
X = LED, no polarity (standard) **C7-G20X.....VDC**  
Free-wheeling diode **C7-G20DX....VDC**  
Polarity and free-wheeling diodes **C7-G20FX ....VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C7-G20BX....VDC**



**Relay compatible with sockets:**

S7-M, S7-L, S7-P, S7-PO, S7-I/O



# C7-X10



Power relay, DC application  
Single pole, NO, double make

**10 A 250 V AC1      6 A 110 V DC1**  
**10 A 30V DC1      1 A 220 V DC1**

### Contacts


Materials: Standard, code 0 AgNi  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage  $\leq 0.8 \times U_n$   
Drop-out voltage  $\geq 0.1 \times U_n$   
Nominal coil power 1.5 VA (AC)/1.3 W (DC)

VAC	$\Omega$	mA	VDC	$\Omega$	mA
24	153	62	12	111	108
48	611	31	24	432	55
115	3K6	13	48	1K7	27
230	14K6	6.5	110	9K2	12


**Table 1 Electrical Life, ops. x 10<sup>6</sup>**

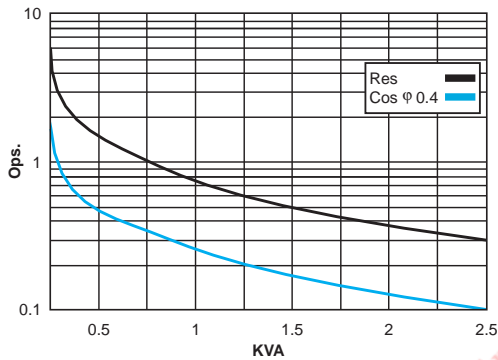

**Table 2 Max. DC Load**

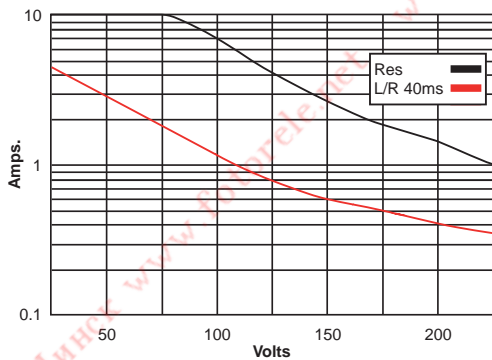

### Dimensions - mm

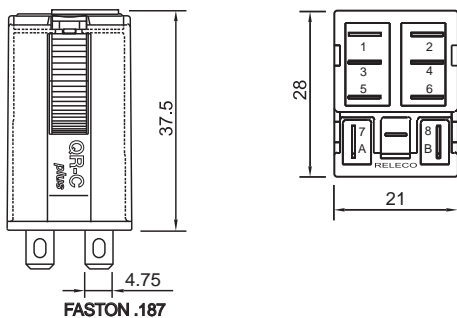

### Insulation

Dielectric strength (1 minute):  
Open contacts 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V  $\geq 1$  G $\Omega$   
Isolation, IEC 61810-5: 2.5 KV/3


### Specifications

Operate time + bounce time 20 ms  
Release time + bounce time 10 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load  $\geq 100,000$  ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 43 g

### Standard Types


**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C7-X10X.....VAC**

**DC 12, 24, 48, 110**  
X = LED, no polarity (standard) **C7-X10X..... VDC**  
Free-wheeling diode **C7-X10DX .... VDC**  
Polarity and free-wheeling diodes **C7-X10FX..... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C7-X10BX .... VDC**




Relay compatible with sockets:


S7-M, S7-L, S7-P, S7-PO, S7-I/O




**Table 1** Electrical Life, ops. x 10<sup>6</sup>

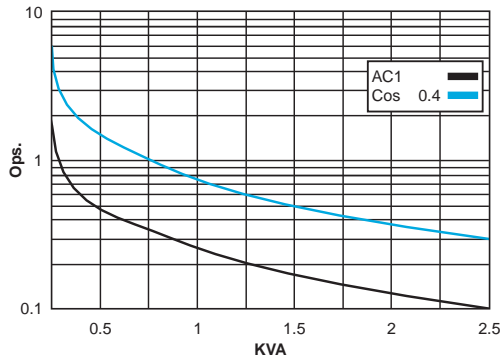

**Table 2** Max. DC Load

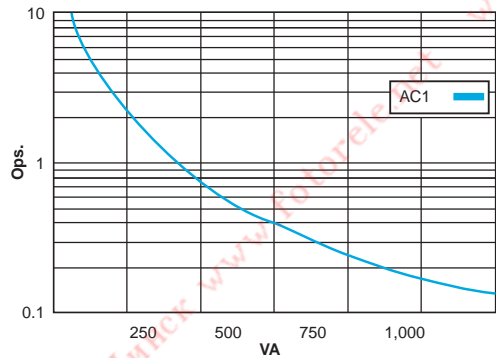

**Dimensions - mm**

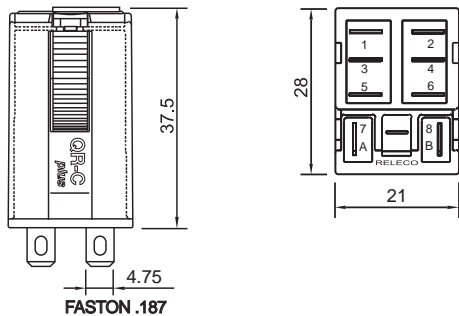

**C7-H23**



Power contact 10 A and bifurcated contact for current level

<b>10 A</b>	<b>250 V</b>	<b>AC1</b>	<b>6 A</b>	<b>250 V</b>	<b>AC1</b>
<b>6 A</b>	<b>30 V</b>	<b>DC1</b>	<b>10 A</b>	<b>30 V</b>	<b>DC1</b>

**Contacts**

**Power Contacts**

Standard material	AgNi
Max. switching current	10 A
Max. peak inrush current (20 ms)	30 A
Max. switching voltage	250 V
Max. AC load (Table 1)	2.5 KVA
Max. DC load (Table 2)	

**Bifurcated Contacts**

Standard material	AgNi + 0.3μ Au
Max. switching current	6 A
Max. peak inrush current (20 ms)	15 A
Max. switching voltage	250 V
Minimum current	1 mA 5 V
Max. DC load (Table 2)	

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage	≤0.8 x U <sub>n</sub>
Drop-out voltage	≥0.1 x U <sub>n</sub>
Nominal coil power	1.2 VA (AC)/1 W (DC)

VAC	Ω ± 10%	mA	VDC	Ω ± 10%	mA
24	174	50	12	148	81
48	686	25	24	594	40
115	4K3	10.4	48	2K3	21
230	18K6	5.2	110	11K4	11

**Insulation**

Dielectric strength (1 minute):	
Between adjacent poles	2.5 KV
Between contacts and coil	2.5 KV
Isolation, IEC 61810-5:	2.5 KV/3

**Specifications**


Max. working temperature	60°C
Mechanical life ops.	≥10 million
Protection degree	IP 40
Weight avg.	43 g

**Standard Types**

<b>AC 24, 115, 230</b>	<b>C7-H23</b> ..... VAC
<b>X = LED</b>	<b>C7-H23X</b> ..... VAC
<b>DC 12, 24, 48, 110</b>	<b>C7-H23</b> ..... VDC
<b>X = LED</b>	<b>C7-H23X</b> ..... VDC
Free-wheeling diode	<b>C7-H23DX</b> .... VDC
Polarity and free-wheeling diodes	<b>C7-H23FX</b> ..... VDC
AC/DC bridge rectifier (24, 48 or 60 V)	<b>C7-H23BX</b> .... VDC




IEC 61810 EN 60947



**Relay compatible with sockets:**

**S7-M, S7-L, S7-P, S7-PO, S7-I/O**



# C7-W10



High inrush current  
Single pole, wolfram and silver contacts

**10 A 250 V AC 250 V AC5a/b**

### Contacts


Materials:	Standard, code 0	AgNi
Max. switching current		10 A
Max. peak inrush current (2.5 ms)		500 A
Max. switching voltage		250 V
Max. AC load (Table 1)		2.5 KVA
Max. DC load (Table 2)		

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage	≤0.8 × U <sub>n</sub>
Drop-out voltage	≥0.1 × U <sub>n</sub>
Nominal coil power	1.5 VA (AC)/1.5 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	153	62	12	99	121
48	611	31	24	388	61
115	3K6	13	48	1K5	32
230	14K6	4.5	110	8K	14


**Table 1** Electrical Life, ops. × 10<sup>6</sup>

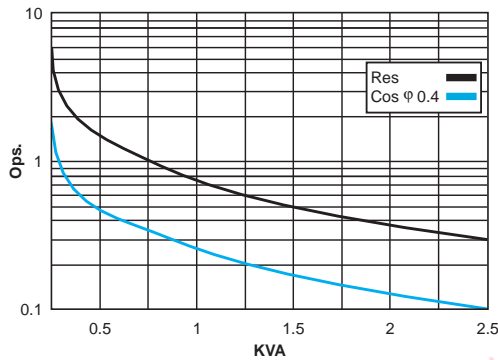

**t** Max. DC Load

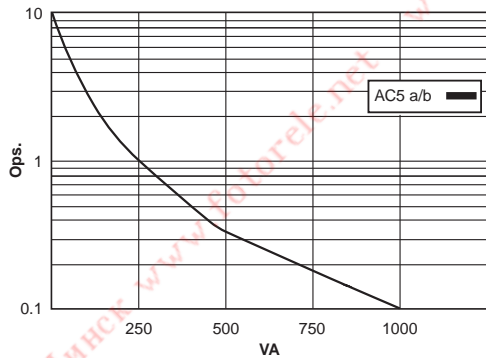

### Dimensions - mm

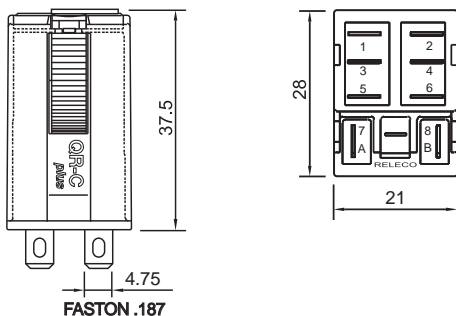

### Insulation

Dielectric strength (1 minute):	
Open contacts	1,000 V
Between contacts and coil	2.5 KV
Isolation resistance at 500 V	≥1 GΩ
Isolation, IEC 61810-5:	2.5 KV


### Specifications

Operate time + bounce time	20 ms
Release time + bounce time	10 ms
Ambient temperature	-40°C (no ice) to +70°C
Mechanical life ops.	10 Mill. AC, 20 Mill. DC relays
Electrical life at nominal load	≥100,000 ops.
Operating frequency at nominal load	1,200/hour
Protection degree	IP 40/RT1
Weight avg.	43 g

### Standard Types


**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
**X = LED (standard) C7-W10X.....VAC**

**DC 12, 24, 48, 110**  
**X = LED, no polarity (standard) C7-W10X..... VDC**  
**Free-wheeling diode C7-W10DX ... VDC**  
**Polarity and free-wheeling diodes C7-W10FX.... VDC**  
**AC/DC bridge rectifier (24, 48 or 60 V) C7-W10BX ... VDC**



Relay compatible with sockets:

S7-M, S7-L, S7-P,  
S7-PO, S7-I/O



# R7-A20D



Railway Application Relay


According to EN 60077-1-2/99 - EN 61373/99

**10 A 250 V AC1      10 A 30 V DC1**


### Contacts

Materials:	Standard, code 0	AgNi
	Optional, code 4	AgNi + 0.2μ Au
	Optional, code 8	AgNi + 10μ Au
Max. switching current		10 A
Max. peak inrush current (20 ms)		30 A
Max. switching voltage		250 V
Max. AC load (Table 1)		
Max. DC load (Table 2)		


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

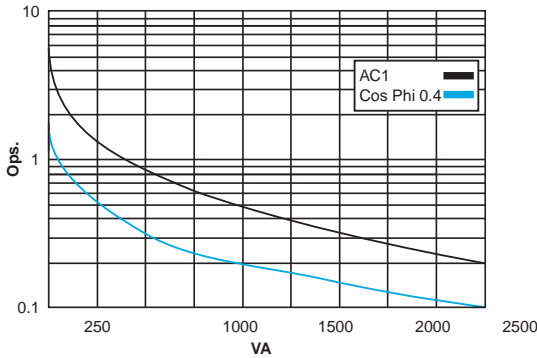

**Table 2** Max DC Load

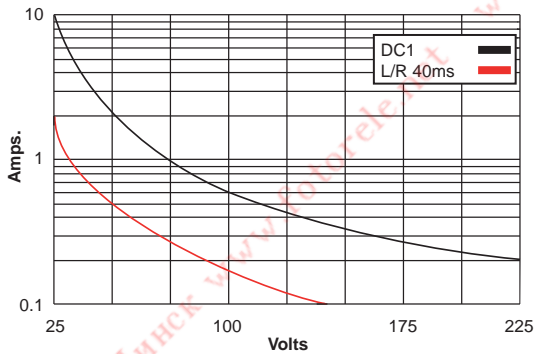

### Dimensions - mm

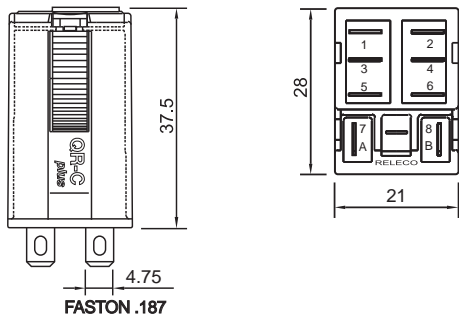

### Coils

Operation Range	0.7 U <sub>n</sub> @ 1.25 U <sub>n</sub>
Power Consumption	>0.1 U <sub>n</sub>
Power Consumption	1.07 W
Generated transients	OV, include FWD

Voltage	Ω ± 10%	mA
24	535	45
48	2004	24
72	4750	15
110	11337	10

### Isolation

Polution grade	PD3
With voltage (1.2/50μs) / Dielectric strength (1 minute)	
Contact coil	4 KV/2,220 V
Between different poles	4 KV/2,220 V
Between contacts on the same pole	1,550 V


### Specifications

Ambient temperature	-25°C to +70°C
Number of mechanical operations	20 million
Thermic Class	B (130°C)
Vibration: Category/Class	1/B Body Mounted
Vibration	5-150 Hz (3 axes)
Shock	5 g (3 axes)
Operation (UN)/release time	10 ms/15 ms
Weight avg.	35 g
Weight avg. Relay + Socket	75 g
Relay Protection	IP 40

### Standard Types


DC 24, 48, 72, 110  
Free-wheeling diode      **R7-A20D..... VDC**



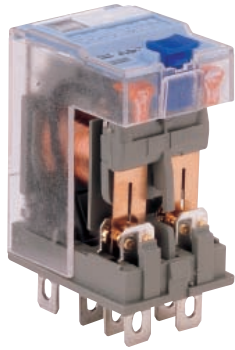

**Relay compatible with sockets:**

**S7-M, S7-L, S7-P, S7-PO, S7-I/O**



# R7-T21D



**Railway Application Relay**


According to EN 60077-1-2/99 - EN 61373/99

**6 A 250 V AC1 6 A 30 V DC1**

### Contacts

Materials:	Standard, code 1	AgNi + 0.2μ Au
	Optional, code 2	AgNi + 10μ Au
Max. switching current		6 A
Max. peak inrush current (20 ms)		15 A
Max. switching voltage		250 V
Max. AC load (Table 1)		
Max. DC load		100,000 ops.

**Table 1** Electrical Life, ops. x 106

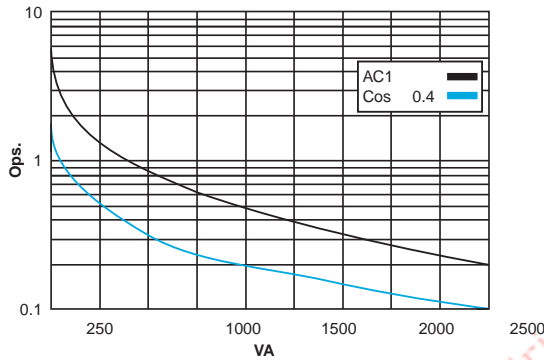


### Coils

Operation Range	0.7 Un @ 1.25 Un
Power Consumption	>0.1 Un
Power Consumption	1.07 W
Generated transients	OV, include FWD

Voltage	Ω ± 10%	mA
24	535	45
48	2004	24
72	4750	15
110	11337	10

**Table 2** Max DC Load

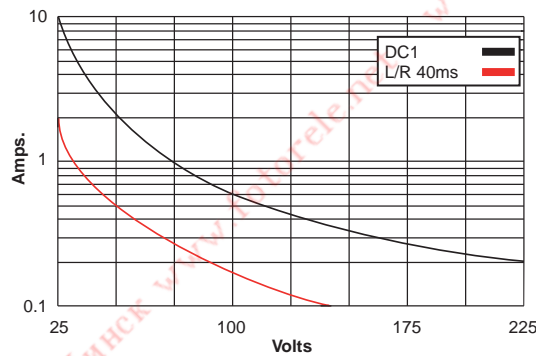


### Isolation

Polution grade	PD3
With voltage (1.2 / 50μs)/Dielectric strength (1 minute)	
Contact coil	4 KV/2,220 V
Between different poles	4 KV/2,220 V
Between contacts on the same pole	1,550 V

### Specifications

Ambient temperature	-25°C to +70°C
Number of mechanical operations	20 million
Thermic Class	B (130°C)
Vibration: Category/Class	1/B Body Mounted
Vibration	5-150 Hz (3 axes)
Shock	5 g (3 axes)
Operation (UN)/release time	10 ms/15 ms
Weight avg.	35 g
Weight avg. Relay + Socket	75 g
Relay Protection	IP 40

### Dimensions - mm

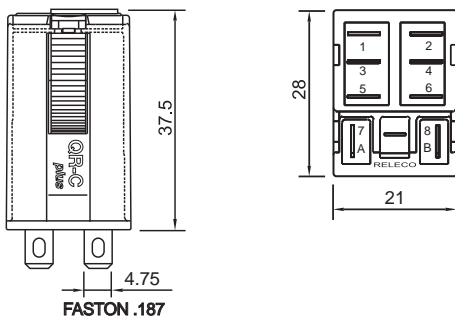

### Standard Types

**DC 24, 48, 72, 110**


Free-wheeling diode

**R7-T21D..... VDC**







**Relay compatible with sockets:**  
S9-M, S9-L, S9-P, S9-PO

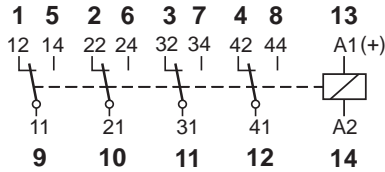


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

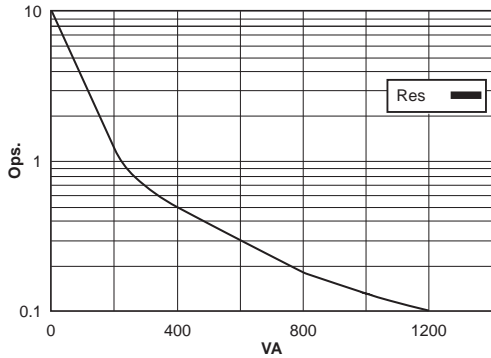

**Table 2** Max. DC Load

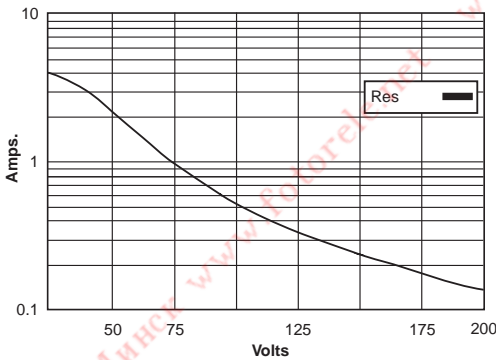

**Dimensions - mm**

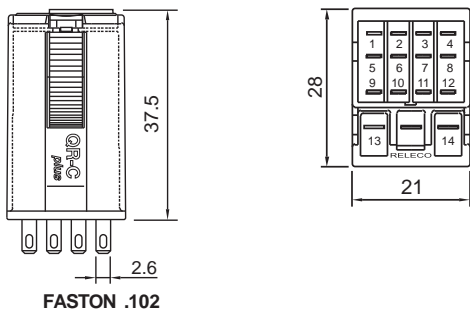

**C9-A41**



General purpose  
Four pole, change-over contacts

**5 A 250 V AC1**  
**5 A 30 V DC1 0.2 A 110 V DC1**

**Contacts**

Materials: Standard, code 1 AgNi + 0.2μAu  
Optional, code 2 AgNi + 10μAu  
Max. switching current 5 A  
Max. peak inrush current (2.5 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 1250 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 1.2 VA (AC)/1 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	85
48	686	25	24	594	43
115	4K3	10.4	48	2K3	21
230	18K6	5.2	110	11K4	11

**Insulation**

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 2.5 KV

**Specifications**

Operate time + bounce time 10 ms  
Release time + bounce time 6 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 43 g

**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 72, 115, (120), 230, (240)**  
X = LED (standard) **C9-A41X..... VAC**


**DC 12, 24, 48, 72, 110**  
X = LED, no polarity (standard) **C9-A41X..... VDC**  
Free-wheeling diode **C9-A41DX .... VDC**  
Polarity and free-wheeling diodes **C9-A41FX..... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V) **C9-A41BX .... VDC**







**Relay compatible with sockets:**  
S9-M, S9-L, S9-P, S9-PO

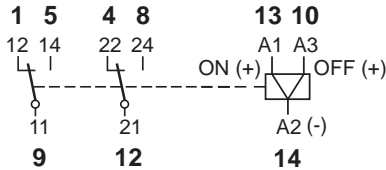

# C9-R21



Magnetic latching relay  
Two change-over contacts, 5 A

**5 A 120 V AC1**  
**5 A 30 V DC1**

### Contacts


Materials: Standard, code 1 AgNi + 0.2μAu  
 Max. switching current 5 A  
 Max. peak inrush current (10 ms) 15 A  
 Max. switching voltage 250 V  
 Max. AC load (Table 1) 1,200 KVA  
 Max. DC load (Table 2)

### Coils


ON pulse power 1.2 VA/W  
 OFF pulse power 0.3 VA/W  
 One winding for AC. Two windings for DC.

VAC	ON mA	OFF mA	VDC	ON mA	OFF mA
24	50	8	12	100	25
48	25	4	24	50	12
115	10	2	48	25	6
230	5	1	60	20	5

**Table 1** Electrical Life, ops. x 10<sup>6</sup>

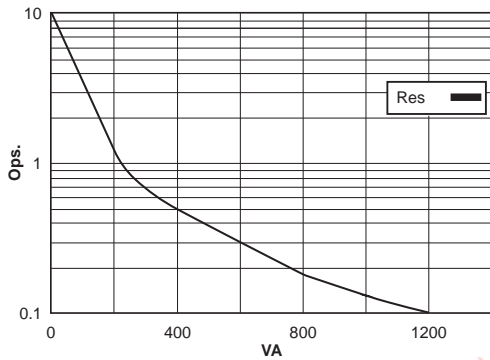

**Table 2** Max. DC Load

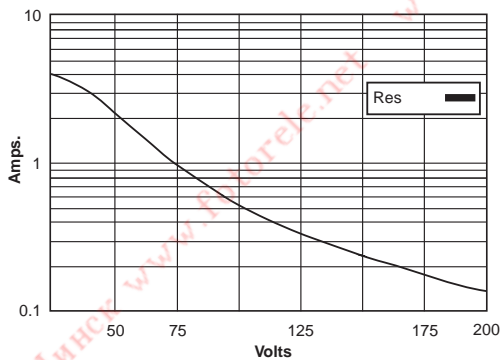


### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
 Between adjacent poles 2 KV  
 Between contacts and coil 2 KV  
 Isolation resistance at 500 V ≥1 GΩ  
 Isolation, IEC 61810-5: 2.5 KV/2

### Specifications

Minimum, pulse length for ON/OFF 50 ms  
 Ambient temperature -40°C (no ice) to +70°C  
 Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
 Electrical life at nominal load ≥100,000 ops.  
 Operating frequency at nominal load 1,200/hour  
 Protection degree IP 40/RT1  
 Weight avg. 43 g

### Dimensions - mm

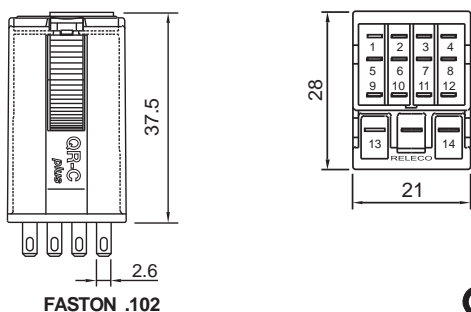


### Standard Types

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
**C9-R21 ..... VAC**  
 DC 12, 24, 48, 60  
**C9-R21 ..... VDC**



**Relay compatible with sockets:**  
S9-M, S9-L, S9-P, S9-PO



# C9-E21

General purpose. Sensitive 500 mW  
Two pole, change-over contacts  
DC operating range:  $0.8-1.7 \times U_n$

**5 A 250 V AC1 5 A 30 V DC1**

### Contacts


Materials: Standard, code 1 AgNi + 0,2μAu  
Optional, code 2 AgNi + 10μAu  
Max. switching current 5 A  
Max. peak inrush current (2.5 ms) 15 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 1,200 VA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage  $\leq 0.8 \times U_n$   
Drop-out voltage  $\geq 0.1 \times U_n$   
Nominal coil power 0.8 VA (AC)/0.5 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	238	33	12	288	42
48	1K	17	24	1K1	21
115	5K9	7	48	4K6	10
230	23K9	3.5	110	24K2	4.5


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

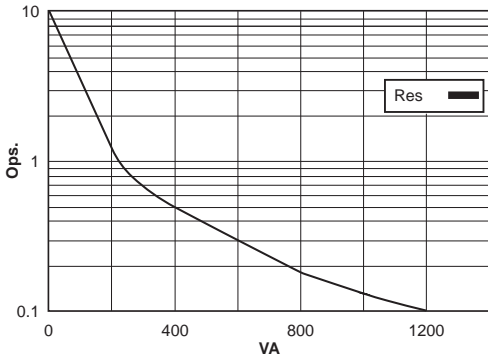

**Table 2** Max. DC Load

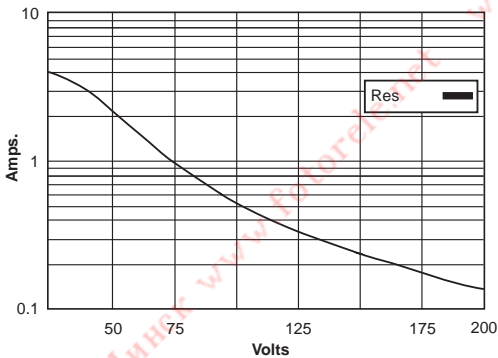

### Dimensions - mm

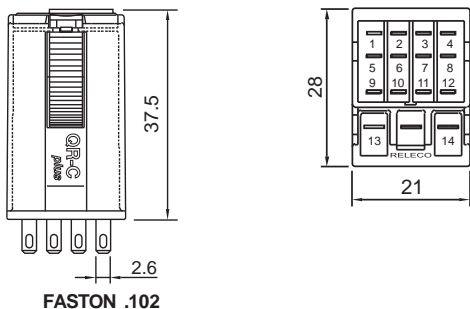

### Insulation

Dielectric strength (1 minute): Open contacts 1,000 V  
Between adjacent poles 2.5 KV  
Between contacts and coil 2.5 KV  
Isolation resistance at 500 V  $\geq 1 \text{ G}\Omega$   
Isolation, IEC 61810-5: 2.5 KV/3

### Specifications

Operate time + bounce time 10 ms  
Release time + bounce time 6 ms  
Ambient temperature -40°C (no ice) to +60°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load  $\geq 100,000$  ops.  
Operating frequency at nominal load 1,200/hour  
Protection degree IP 40/RT1  
Weight avg. 40 g


### Standard Types

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard) C9-E21X ..... VAC

DC 12, 24, 48, 110  
X = LED, no polarity (standard) C9-E21X ..... VDC  
Free-wheeling diode C9-E21DX .... VDC  
Polarity and free-wheeling diodes C9-E21FX ..... VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C9-E21BX .... VDC



Relay compatible with sockets: S10, S10-M, S10-P, S10-K



# C10-A10



One pole, change-over contact

10 A 250 V AC1	0.5 A 110 V DC1
10 A 30 V DC1	0.2 A 220 V DC1
13 A 250 V AC1	

### Contacts

Materials:	Standard, code 0	AgNi
	Optional, code 8	AgNi + 10µ Au
	Optional, code 5	AgSnO <sub>2</sub>
Max. switching current		10 A
Max. peak inrush current (20 ms)		30 A
Max. switching voltage		250 V
Max. AC load (Table 1)		2.5 KVA
Max. DC load (Table 2)		

### Coils (Ohms ±10% @ 20°C)

Pull-in voltage	≤0.8 x U <sub>n</sub>
Drop-out voltage	≥0.1 x U <sub>n</sub>
Nominal coil power	1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

Table 1 Electrical Life, ops. x 10<sup>6</sup>


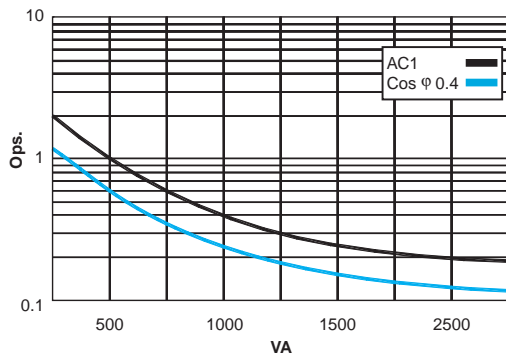


Table 2 Max. DC Load

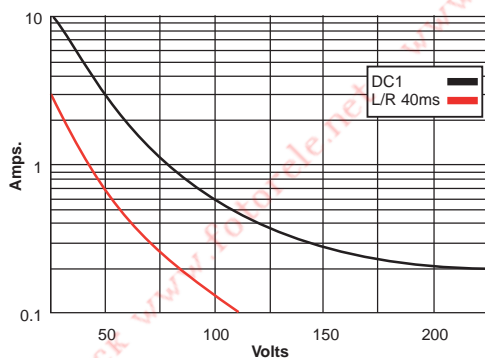


### Insulation

Dielectric strength (1 minute):	
Open contacts	1,000 V
Between contact and coil	5 KV
Isolation resistance at 500 V	≥1 GΩ
Isolation, IEC 61810-5:	4 KV/3

### Specifications

Operate time + bounce time	10 ms
Release time + bounce time	5 ms
Ambient temperature	-40°C (no ice) to +70°C
Mechanical life ops.	10 Mill. AC, 20 Mill. DC relays
Electrical life at nominal load	≥100,000 ops.
Operating frequency at nominal load	1,200/hour
Protection grade	IP 40/RT1
Weight avg.	21 g

### Dimensions - mm

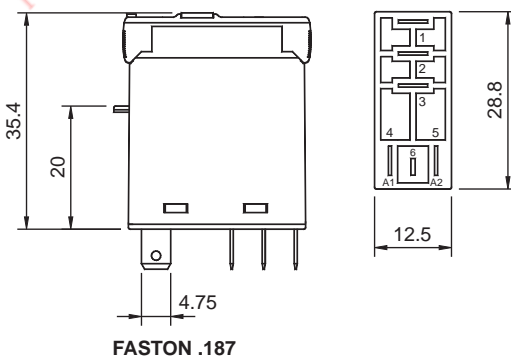


### Standard Types


AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)	
X = LED (standard)	C10-A10X.....VAC
RC suppressor	C10-A10R.....VAC
DC 12, 24, 48, 110	
X = LED, no polarity (standard)	C10-A10X..... VDC
Options (DC coils)	
Polarity and free-wheeling diodes	C10-A10FX... VDC
AC/DC bridge rectifier (24 or 48 V)	C10-A10BX.. VDC




IEC 61810 EN 60947




Relay compatible with sockets:  
S10, S10-M, S10-P, S10-K




**Table 1** Electrical Life, ops. x 10<sup>6</sup>

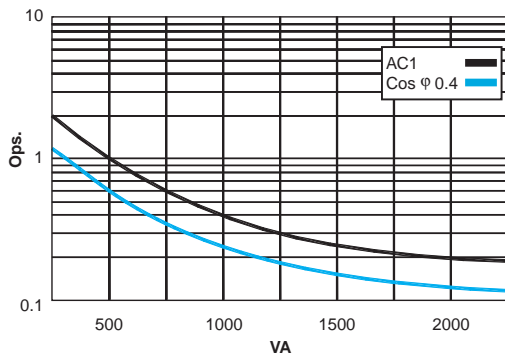

**Table 2** Max. DC Load

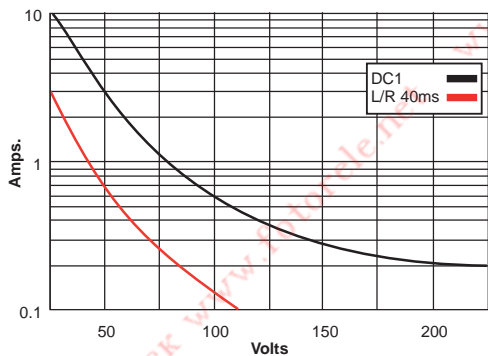

**Dimensions - mm**

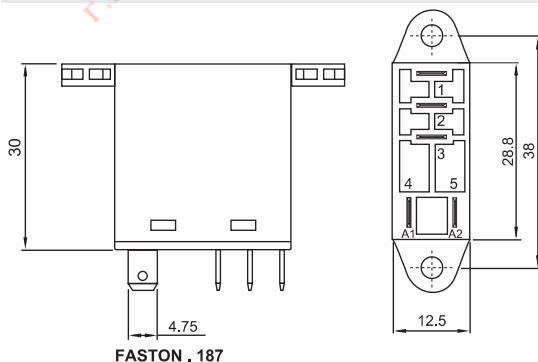

FASTON . 187

**C10-A10E**



One pole, change-over contact

10 A 250 V AC1      0.5 A 110 V DC1  
10 A 30 V DC1      0.5 A 220 V DC1  
13 A 250 V AC1

**Contacts**

Materials: Standard, code 0      AgNi  
Optional, code 8      AgNi + 10μ Au  
Max. switching current      10 A  
Max. peak inrush current (20 ms)      30 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      2.5 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

**Insulation**

Dielectric strength (1 minute):  
Open contacts      1,000 V  
Between contact and coil      5 KV  
Isolation resistance at 500 V      ≥3 GΩ  
Isolation, IEC 61810-5:      4 KV/3

**Specifications**

Operate time + bounce time      10 ms  
Release time + bounce time      8 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops.      10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection grade      IP 40/RT1  
Weight avg.      21 g

**Standard Types**


AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
C10-A10E.....VAC  
DC 12, 24, 48, 110  
C10-A10E..... VDC



IEC 61810 EN 60947



**Relay compatible with sockets:**  
S10, S10-M, S10-P, S10-K



# C10-G10



One pole, open contact

**10 A 250 V AC1      0.8 A 110 V DC1**  
**10 A 30 V DC1      0.4 A 220 V DC1**

### Contacts


Materials: Standard, code 0 AgNi  
Optional, code 8 AgNi + 10µ Au  
Optional, code 5 AgSnO<sub>2</sub>  
Max. switching current 10 A  
Max. peak inrush current (20 ms) 30 A  
Max. switching voltage 250 V  
Max. AC load (Table 1) 2.5 KVA  
Max. DC load (Table 2)

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage ≤0.8 x U<sub>n</sub>  
Drop-out voltage ≥0.1 x U<sub>n</sub>  
Nominal coil power 1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

**Table 1** Electrical Life, ops. x 10<sup>6</sup>

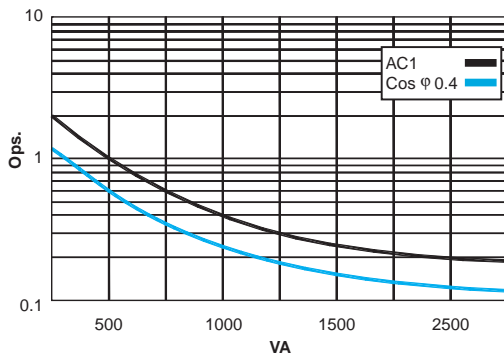

**Table 2** Max. DC Load

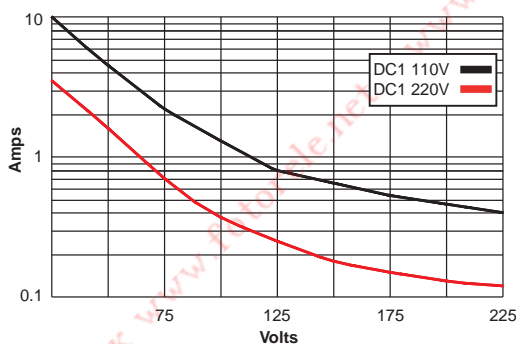


### Insulation

Dielectric strength (1 minute):  
Open contacts 2000 V  
Between contact and coil 5 KV  
Isolation resistance at 500 V ≥1 GΩ  
Isolation, IEC 61810-5: 4 KV/3

### Specifications

Operate time + bounce time 10 ms  
Release time + bounce time 8 ms  
Ambient temperature -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load ≥100,000 ops.  
Operating frequency at nominal load 1,200/hour  
Protection grade IP 40/RT1  
Weight avg. 21 g

### Dimensions - mm

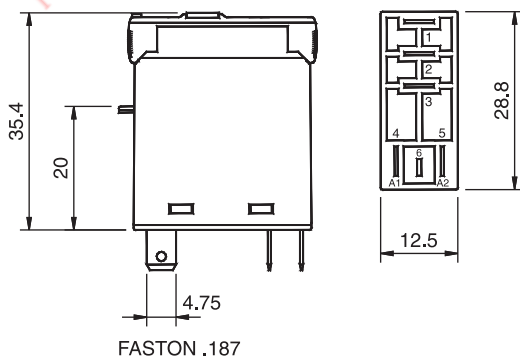


### Standard Types

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard) **C10-G10X.....VAC**  
RC suppressor **C10-G10R .... VAC**  
**DC 12, 24, 48, 110**  
X = LED, no polarity (standard) **C10-G10X..... VDC**  
**Options (DC coils)**  
Polarity and free-wheeling diodes **C10-G10FX .. VDC**  
AC/DC bridge rectifier (24 or 48 V) **C10-G10BX.. VDC**




Relay compatible with sockets:


S10, S10-M, S10-P, S10-K




**Table 1** Electrical Life, ops. x 10<sup>6</sup>

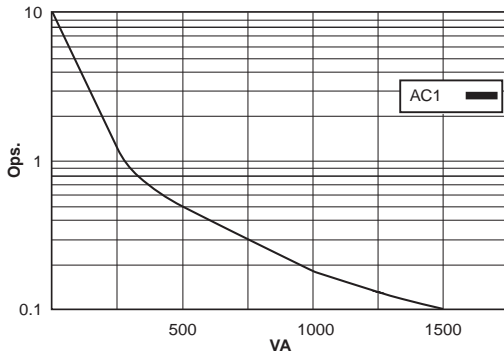

**Table 2** Max. DC Load

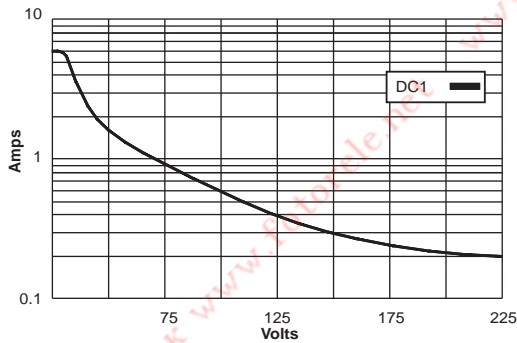

**Dimensions - mm**

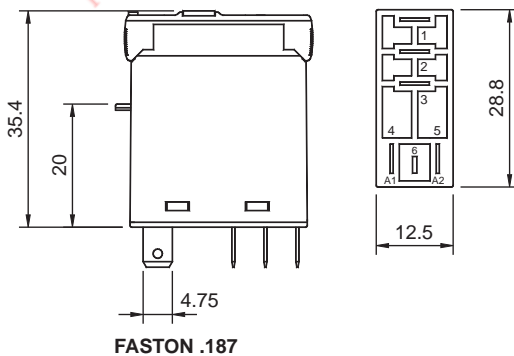

# C10-T13



One change-over twin contact

6 A 250 V AC1      0.5 A 110 V DC1  
6 A 30 V DC1      0.2 A 220 V DC1

**Contacts**

Materials: Standard, code 3      AgNi + 3μ Au  
Optional, code 2      AgNi + 10μ Au  
Max. switching current      6 A  
Max. peak inrush current (20 ms)      15 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      1.5 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

**Insulation**

Dielectric strength (1 minute):  
Open contacts      1,000 V  
Between contact and coil      5 KV  
Isolation resistance at 500 V      ≥1 GΩ  
Isolation, IEC 61810-5:      4 KV/3

**Specifications**

Operate time + bounce time      10 ms  
Release time + bounce time      5 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC relays, 20 Mill. DC relays  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection grade      IP 40/RT1  
Weight avg.      21 g

**Standard Types**

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard)      C10-T13X.....VAC  
RC suppressor      C10-T13R.....VAC

**DC 12, 24, 48, 110**


X = LED, no polarity (standard)      C10-T13X.....VDC

**Options** (DC coils)

Polarity and free-wheeling diodes      C10-T13FX... VDC  
AC/DC bridge rectifier (24, 48 or 60 V)      C10-T13BX... VDC




IEC 61810 EN 60947




**Relay compatible with sockets:**


**S10, S10-M, S10-P, S10-K**




**Table 1** Electrical Life, ops. x 10<sup>6</sup>

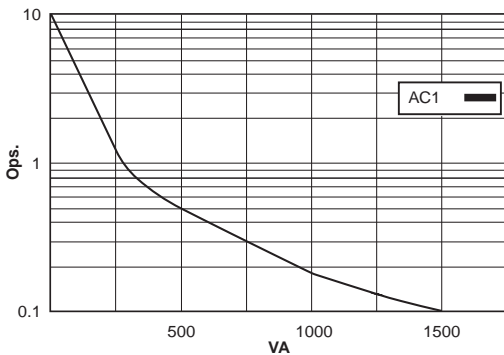

**Table 2** Max. DC Load

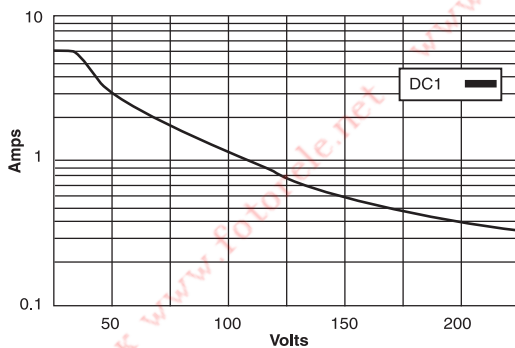

**Dimensions - mm**

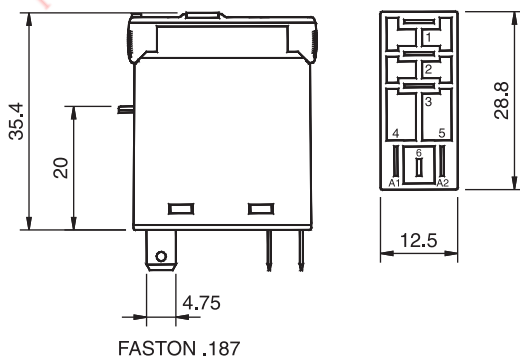

**C10-GT13**



One pole, twin open contact

**6 A 250 V AC1      0.8 A 110 V DC1**  
**6 A 30 V DC1      0.4 A 220 V DC1**

**Contacts**

Materials: Standard, code 3      AgNi + 3μ Au  
Optional, code 2      AgNi + 10μ Au  
Max. switching current      6 A  
Max. peak inrush current (20 ms)      15 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      1.5 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

**Insulation**

Dielectric strength (1 minute):  
Open contacts      2,000 V  
Between contact and coil      5 KV  
Isolation resistance at 500 V      ≥3 GΩ  
Isolation, IEC 61810-5:      4 KV/3

**Specifications**

Operate time + bounce time      10 ms  
Release time + bounce time      8 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC relays, 20 Mill. DC relays  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection grade      IP 40/RT1  
Weight avg.      21 g

**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard)      **C10-GT13X ...VAC**  
RC suppressor      **C10-GT13R ...VAC**


**DC 12, 24, 48, 110**  
X = LED, no polarity (standard)      **C10-GT13X ..VDC**

**Options (DC coils)**  
Polarity and free-wheeling diodes      **C10-GT13FX..VDC**  
AC/DC bridge rectifier (24 or 48 V)      **C10-GT13BX..VDC**




Relay compatible with sockets:


S12, S12-P

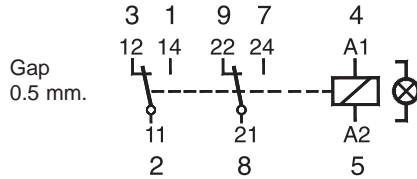


**Table 1** Electrical Life, ops. x 106

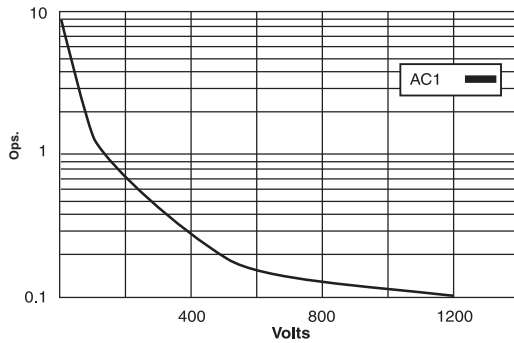

**Table 2** Max. DC Load

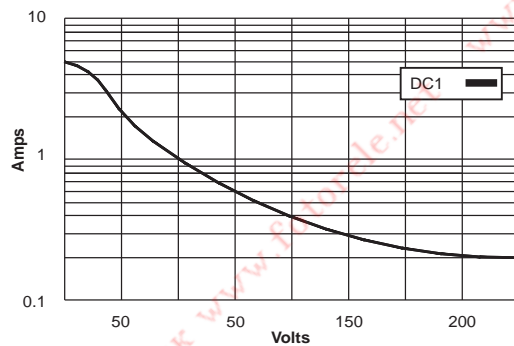

**Dimensions - mm**

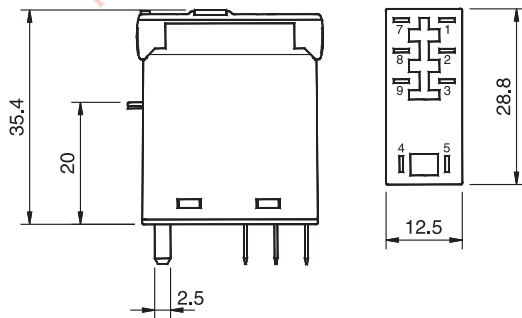

FASTON .098

**C12-A21**



Two poles, change-over contacts

**5 A 250 V AC1      0.5 A 110 V DC1**  
**5 A 30 V DC1      0.2 A 220 V DC1**

**Contacts**

Materials: Standard, code 1      AgNi + 0.2μ Au  
Optional, code 2      AgNi + 10μ Au  
Max. switching current      5 A  
Max. peak inrush current (20 ms)      15 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      1.2 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

**Insulation**

Dielectric strength (1 minute):  
Open contacts      1,000 V  
Between adjacent poles      3,000 V  
Between contact and coil      5 KV  
Isolation resistance at 500 V      ≥3 GΩ  
Isolation, IEC 61810-5:      4 KV/3

**Specifications**

Operate time + bounce time      10 ms  
Release time + bounce time      5 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops. 10 Mill. AC relays, 20 Mill. DC relays  
tElectrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection degree      IP 40/RT1  
Weight avg.      21 g


**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
X = LED (standard)      **C12-A21X..... VAC**  
RC suppressor      **C12-A21R..... VAC**

**DC 12, 24, 48, 110**  
X = LED, no polarity (standard)      **C12-A21X..... VDC**


**Options** (DC coils)  
Polarity and free-wheeling diodes      **C12-A21FX... VDC**  
AC/DC bridge rectifier (24, 48 or 60 V)      **C12-A21BX .. VDC**






**Relay compatible with sockets:**


**S12, S12-P**

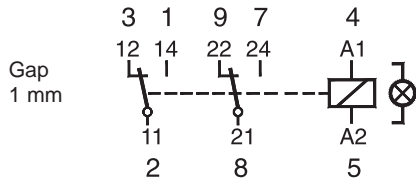


**Table 1** Electrical Life, ops. x 106

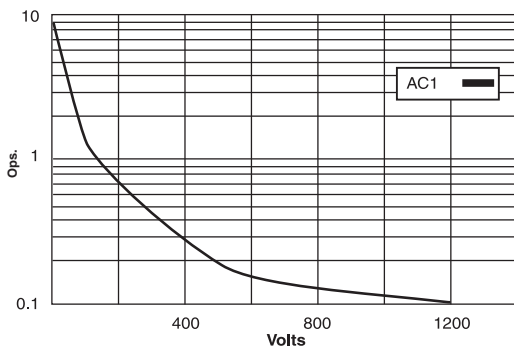

**Table 2** Max. DC Load

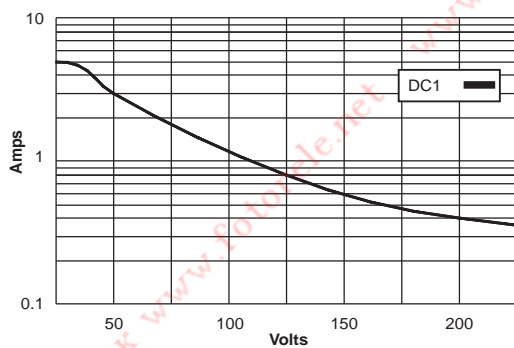

**Dimensions - mm**

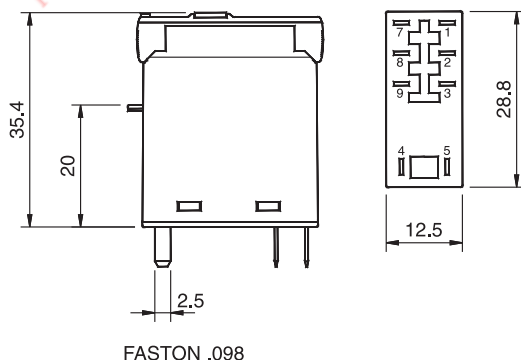

**C12-G21**



Two poles, open contacts

**5 A 250 V AC1      0.8 A 110 V DC1**  
**5 A 30 V DC1      0.4 A 220 V DC1**

**Contacts**

Materials: Standard, code 1      AgNi + 0.2μ Au  
Optional, code 2      AgNi + 10μ Au  
Max. switching current      5 A  
Max. peak inrush current (20 ms)      15 A  
Max. switching voltage      250 V  
Max. AC load (Table 1)      1.2 KVA  
Max. DC load (Table 2)

**Coils** (Ohms ±10% @ 20°C)

Pull-in voltage      ≤0.8 x U<sub>n</sub>  
Drop-out voltage      ≥0.1 x U<sub>n</sub>  
Nominal coil power      1.1 VA (AC)/0.7 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	290	45	12	224	53
48	1,200	23	24	742	32
115	7,300	9.5	48	3,500	13.7
230	28,800	4.7	110	19,900	5.5

**Insulation**

Dielectric strength (1 minute):  
Open contacts      2,000 V  
Between adjacent poles      3,000 V  
Between contact and coil      5 KV  
Isolation resistance at 500 V      ≥3 GΩ  
Isolation, IEC 61810-5:      4 KV/3

**Specifications**

Operate time + bounce time      10 ms  
Release time + bounce time      5 ms  
Ambient temperature      -40°C (no ice) to +70°C  
Mechanical life ops.      10 Mill. AC, 20 Mill. DC relays  
Electrical life at nominal load      ≥100,000 ops.  
Operating frequency at nominal load      1,200/hour  
Protection grade      IP 40/RT1  
Weight avg.      21 g

**Standard Types**

**AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)**  
**X = LED (standard)      C12-G21X.....VAC**  
**RC suppressor      C12-G21R .....VAC**

**DC 12, 24, 48, 110**  
**X = LED, no polarity (standard)      C12-G21X..... VDC**

**Options (DC coils)**  
Polarity and free-wheeling diodes      **C12-G21FX .. VDC**  
AC/DC bridge rectifier (24, 48 or 60 V)      **C12-G21BX.. VDC**



Relay compatible with sockets:  
S10, S10-M, S10-P, S-10K

# CSS-DCP



Solid state relay

DC inductive or resistive load switching  
Positive common output

One open contact

2 A @ 5-50 VDC


### Input, Polarity Protected

Range of input voltage	5-32 VDC
Drop-out voltage	<2.5 VDC
Input current	3 ±1 mA
Current stabilizer	Yes
Peak inrush voltage protection	IEC-1000-4-5 Level 1


### Output, Positive Common

Max. output current	2 A
Max. output voltage	50 VDC
Minimum output voltage	5 VDC
Max. drop voltage	1.3 VDC
Max. leakage current at 48 VDC	<100 µA
Max. overcurrent pulse	5 A, 350 µs
Pulse protection	IEC-1000-4-5 Level 1
Max. current at inverse voltage	1 A

## CSS-DCP Positive Common

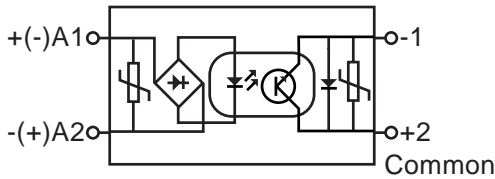

## Max. DC Load vs. Ambient Temperature

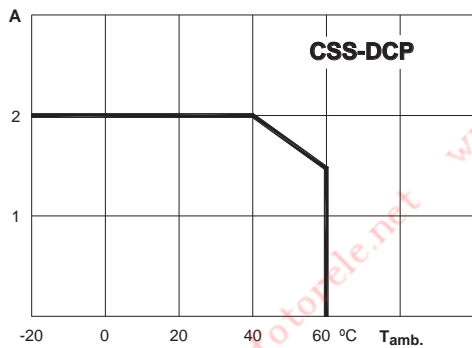

## Specifications



Dielectric strength input / output	4 KV/1 min.
Operate time	1 ms
Release time, max.	2 ms
Working temperature, max.	60°C
Storage temperature	80°C
Weight avg.	28 g

## Applications

To switch up to 50 VDC, heating elements electrovalves, motors, input/output signals on PLC's, solenoids, incandescent and fluorescent lamps, etc.

**Inductive loads must be shunted with an antiparallel diode.**

## Dimensions - mm

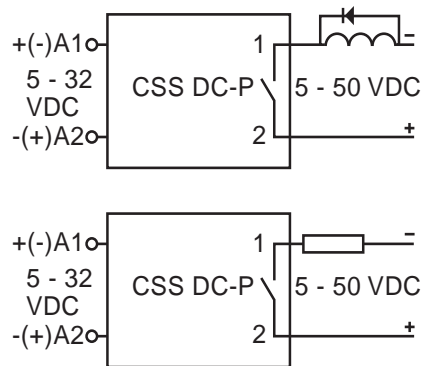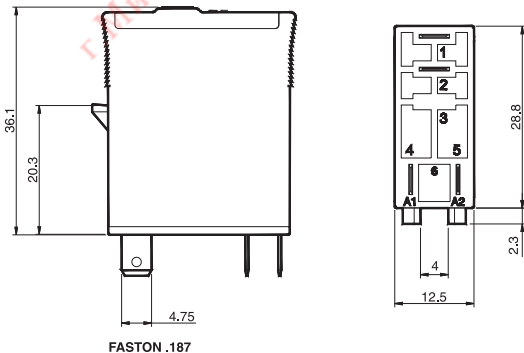



Relay compatible with sockets:  
S10, S10-M, S10-P, S-10K

# CSS-DCN



Solid state relay

DC inductive or resistive load switching  
Negative common output


One open contact

2 A @ 5-50 VDC

### Input, Polarity Protected

Range of input voltage	5-32 VDC
Drop-out voltage	<2.5 VDC
Input current	3 ± 1 mA
Current stabilizer	Yes
Peak inrush voltage protection	EC-1000-4-5 Level 1


### CSS-DCN Negative Common

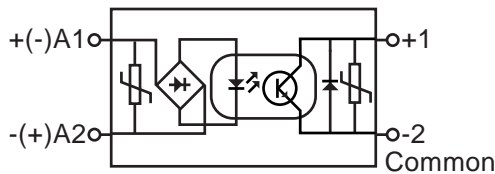

### Output, Positive Common

Max. output current	2 A
Max. output voltage	50 VDC
Minimum output voltage	5 VDC
Max. drop voltage	1.3 VDC
Max. leakage current at 48 VDC	<100 µA
Max. overcurrent pulse	5 A, 350 µs
Pulse protection	IEC-1000-4-5 Level 1
Max. current at inverse voltage	1 A

### Max. DC Load vs. Ambient Temperature

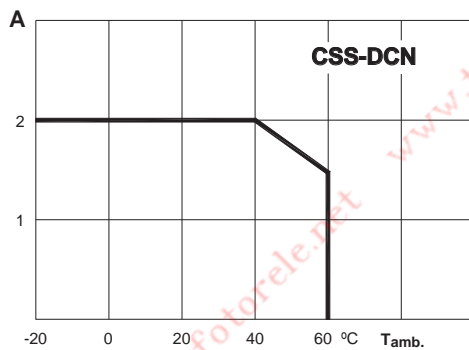

### Specifications




Dielectric strength input / output	4 KV/1 min
Operate time	1 ms
Release time, max.	2 ms
Working temperature, max.	60°C
Storage temperature	80°C
Weight avg.	28 g

### Applications

To switch, up to 50 VDC, heating elements, solenoids, motors, input/output signals on PLC's, solenoids, incandescent and fluorescent lamps, etc.

**Inductive loads must be shunted with an antiparallel diode.**

### Dimensions - mm

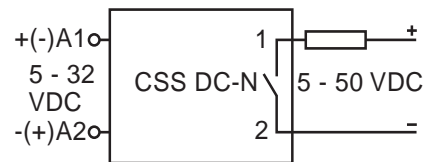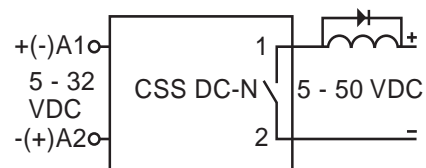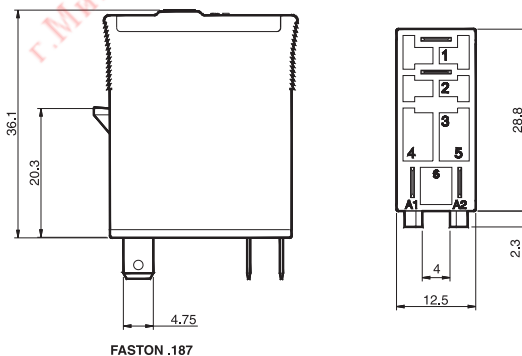



Relay compatible with sockets:  
S10, S10-M, S10-P, S-10K

# CSS-AC



Solid state relay  
AC inductive loads switching


One open contact

3 A @ 24-250 V AC, 50/60 Hz

### Input, Polarity Protected

Range of input voltage	5-32 VDC
Drop-out voltage	<2.5 VDC
Input current	5-15 mA
Current stabilizer	Yes
Peak inrush voltage protection	EC-1000-4-5 Level 1


### CSS-AC AC Instantaneous Output

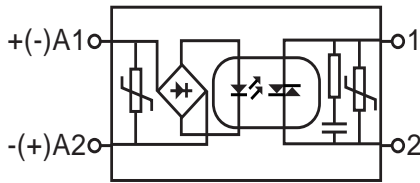

### Output, Instantaneous

Max. output current	3 A
Minimum output current	50 mA
Max. output voltage	250 VAC
Minimum output voltage	24 VAC
Max. drop voltage	<1.5 VAC
Max. leakage current	0.55 mA
Max. Dv/dt	500 V/μs
I <sup>2</sup> t for 10 ms. fuse	50 A <sup>2</sup> /s

### Max. AC Load vs. Ambient Temperature

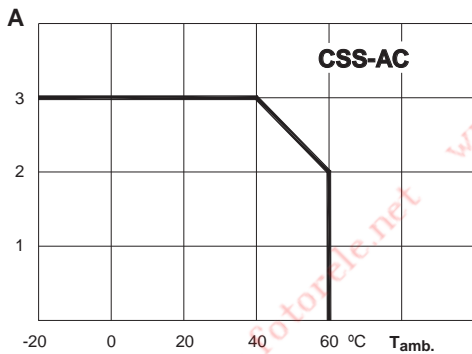

### Specifications



Dielectric strength input/output	4 KV/1min.
Operate time	1/2 cycle
Release time	2 ms + 1/2 cycle
Working temperature, max.	60°C
Storage temperature, max.	80°C
Weight avg.	28 g

### Applications

Suitable to switch inductive loads up to 3 A/250 VAC.

In switching loads with a high inrush or overcurrent (max. Di/dt 50 A/μs) such as transformers, motors or fluorescents, the maximum output current limit it 2 A.

### Dimensions - mm

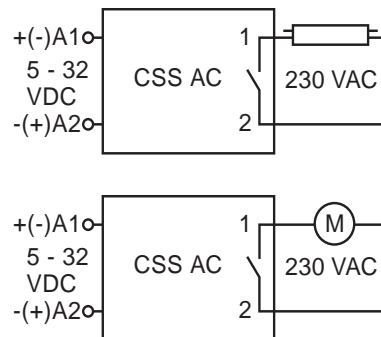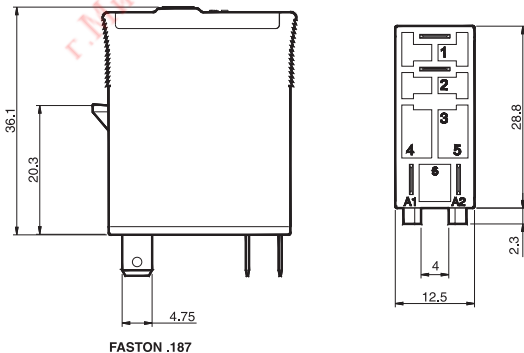



**Relay compatible with sockets:**  
S10, S10-M, S10-P, S-10K

# CSS-AZ



Solid state relay  
**AC resistive loads switching**


One open contact

**3 A @ 24-250 V AC, 50/60 Hz**

### Input, Polarity Protected

Range of input voltage	5-32 VDC
Drop-out voltage	<2.5 VDC
Input current	5-15 mA
Current stabilizer	Yes
Peak inrush voltage protection	EC-1000-4-5 Level 1


### CSS-AZ AC, Synchronized to Zero

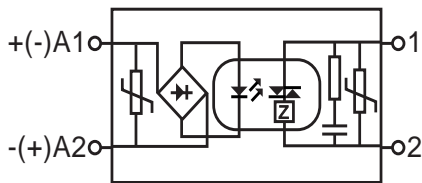

### Output, Synchronized to Zero

Max. output current	3 A
Minimum output current	50 mA
Max. output voltage	250 VAC
Minimum output voltage	24 VAC
Max. drop voltage	<1.5 VAC
Max. leakage current	0.55 mA
Max. Dv/dt	500 V/μs
I <sup>2</sup> t for 10 ms. fuse	50 A2/s

### Max. DC Load vs. Ambient Temperature

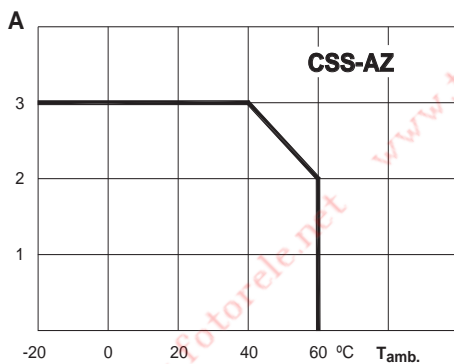

### Specifications

Dielectric strength input/output	4 KV/1min.
Operate time	1/2 cycle
Release time	2 ms + 1/2 cycle
Working temperature, max.	60°C
Storage temperature, max.	80°C
Weight avg.	28 g



### Applications

Switches AC resistive loads up to 3 A/250 VAC in the zero point of the tension and avoids any overcurrent peak in the connection.

Suitable to switch resistors, incandescent lamps, signalling, etc.

**Not suitable for inductive loads.**


### Dimensions - mm

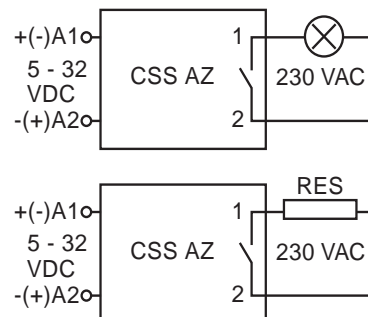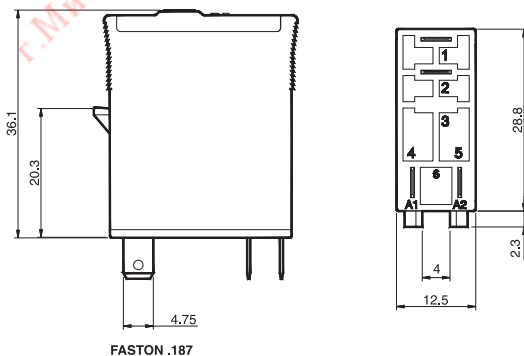

Notes:

г. Минск [www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) email [minsk17@tut.by](mailto:minsk17@tut.by) тел. +375 44 758 4780

# SOCKETS

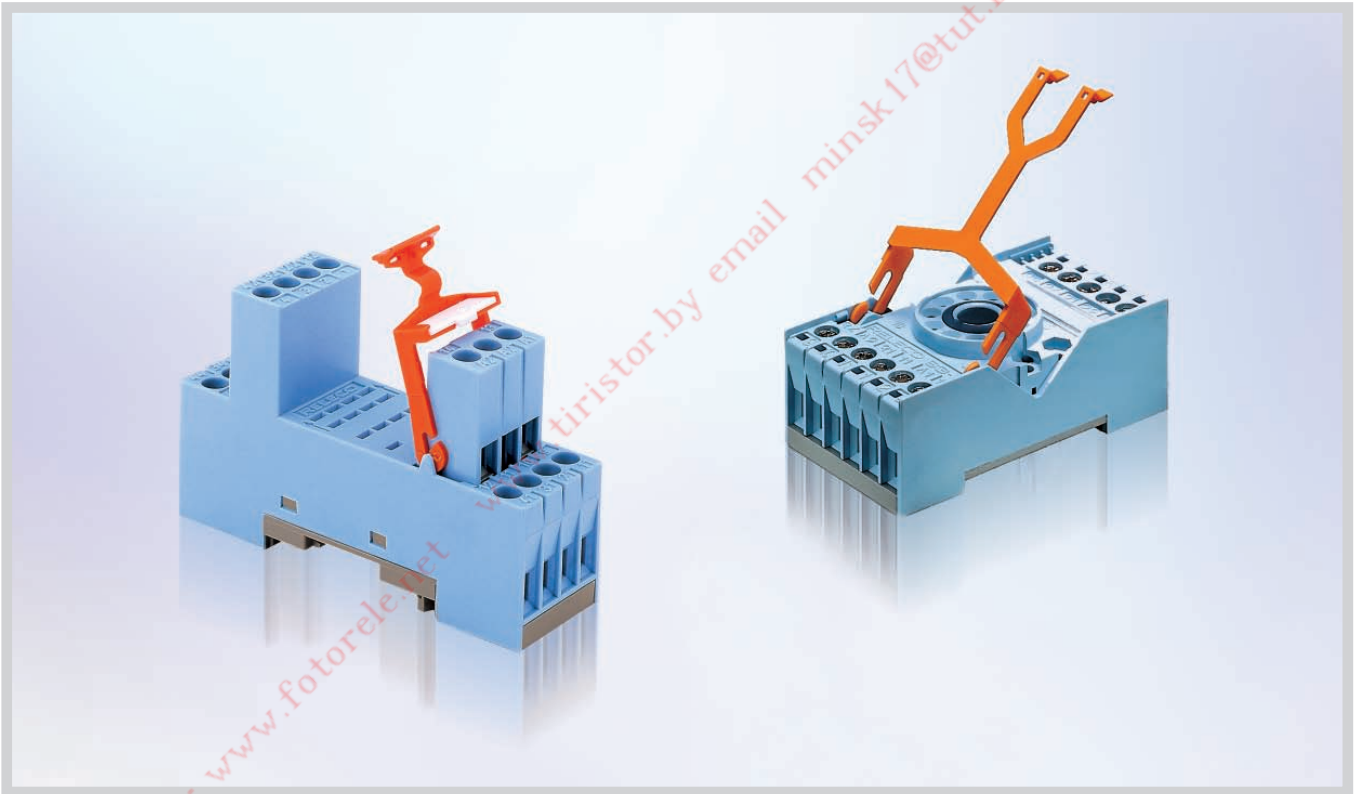



## S2-B



Two pole, one level, coding ring  
Integrated clip and marking label


**10 A 300 V**

### Socket for MRC, 8-Pin Plug-In Relay Types C2-A20, C2-G20, C2-T21



- Accepts the exclusive RELECO coding ring for coding both relay and socket
- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

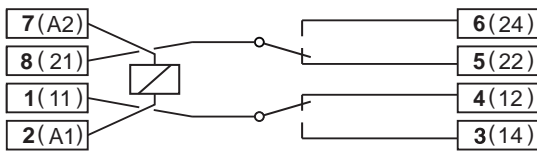

### Dimensions - mm

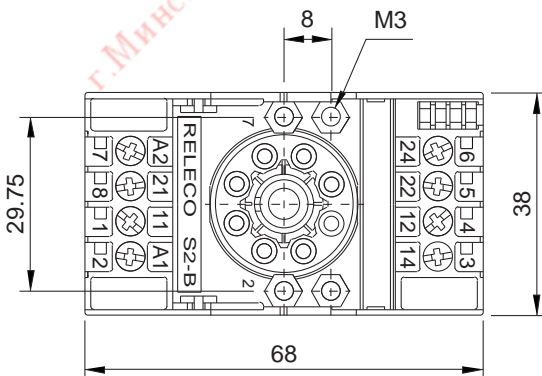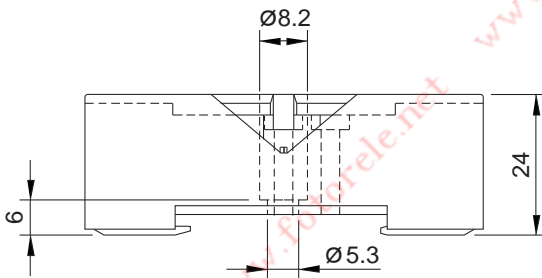

### Specifications

**Nominal Load:** 10 A/300 V

#### Insulation:


Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	





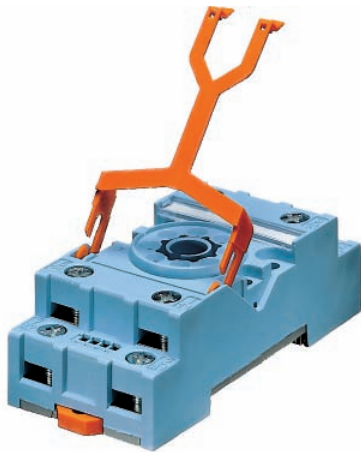

# S2-S



Two pole, two level, coding ring  
Integrated clip and marking label


**10 A 300 V**

### Socket for MRC, 8-Pin Plug-In Relay Types C2-A20, C2-G20, C2-T21


- Accepts the exclusive RELECO coding ring for coding both relay and socket
- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

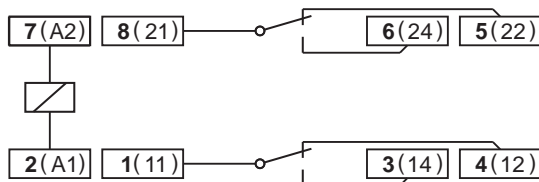

### Dimensions - mm

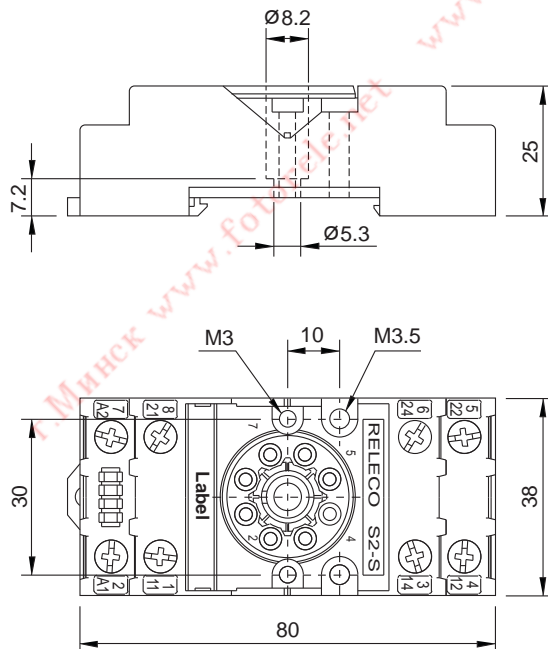

### Specifications

**Nominal Load:** 10 A/300 V

#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	






**S2-L** 2-Pole Flange  
Panel Mountable

**S2-PO** 2-Pole Printed Circuit  
with Flange

**S3-L** 3-Pole Flange  
Panel Mountable

**S3-PO** 3-Pole Printed Circuit  
with Flange

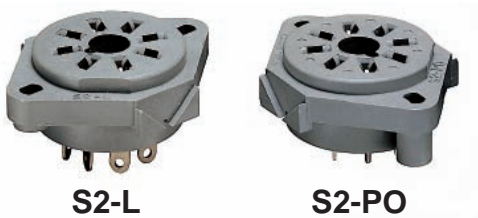

**S2-L**

**S2-PO**



**S3-L**

**S3-PO**


**Specifications**

Nominal Load 10 A/300 V  
Dielectric Strength Adjacent Pin 2.5 KV


**Specifications**

Nominal Load 10 A/250 V  
Dielectric Strength Adjacent Pin 2.5 KV


**Printed Circuit Lay-Out**

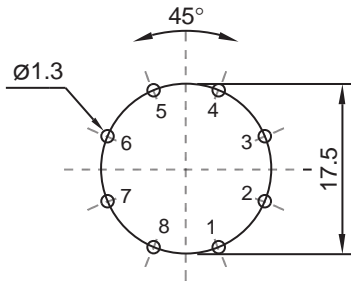






**Printed Circuit Lay-Out**




**Dimensions - mm**

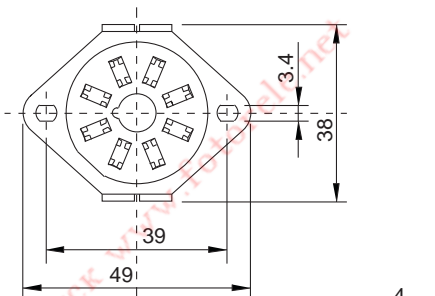

**Dimensions - mm**

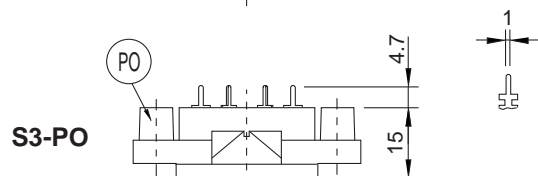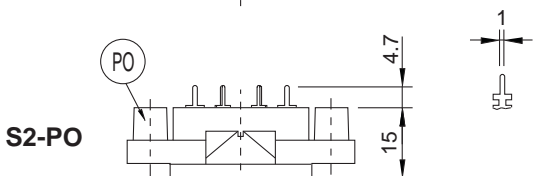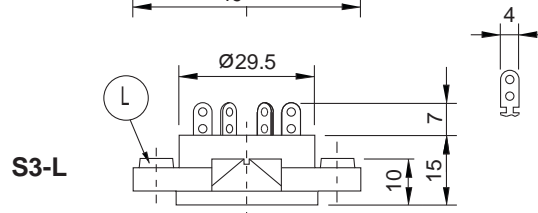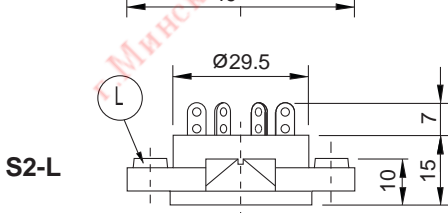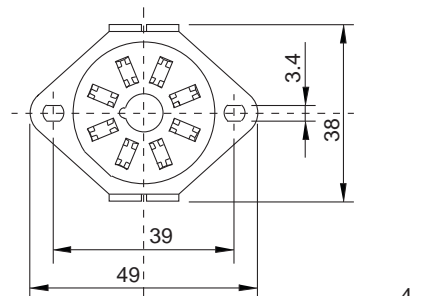

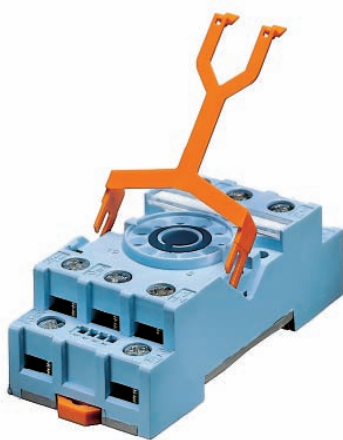

# S3-S



Three pole, two level, coding ring  
Integrated clip and marking label


**10 A 250 V**

**Socket for MRC, 11-Pin Plug-In Relay Types  
C3-A30, C3-G30, C3-T31, C3-X10, C3-M10,  
C3-R20, C3-E24, C3-N34**



- Accepts the exclusive RELECO coding ring for coding both relay and socket.
- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

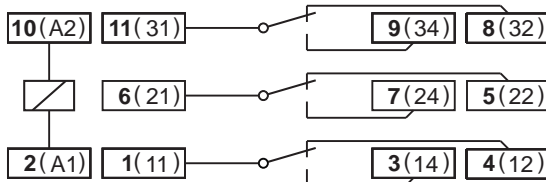

### Dimensions - mm

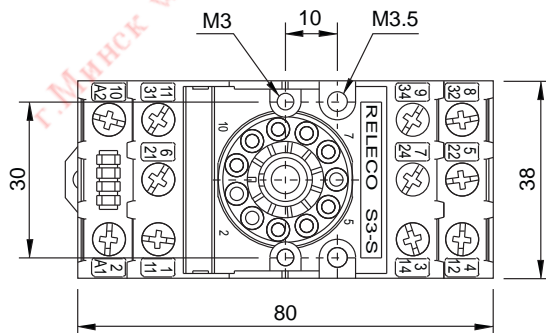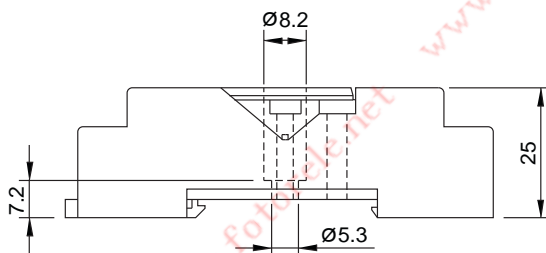

### Specifications

**Nominal Load:** 10 A/250 V

#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	





# S3-B



Three pole, one level, coding ring  
Integrated clip and marking label


**10 A 250 V**

**Socket for MRC, 11-Pin Plug-In Relays Types C3-A30, C3-G30, C3-T31, C3-X10, C3-M10, C3-R20, C3-E24, C3-N34**



- Accepts the exclusive RELECO coding ring for coding both relay and socket.
- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

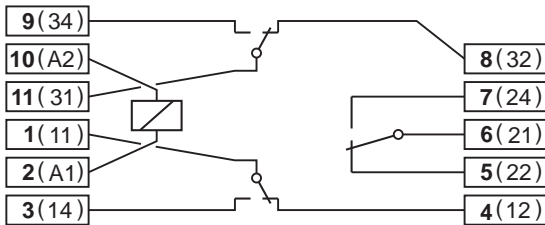

### Dimensions - mm

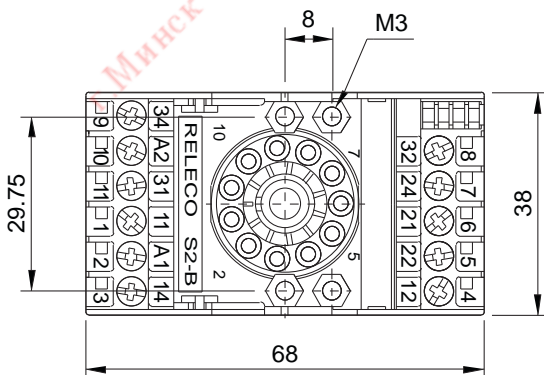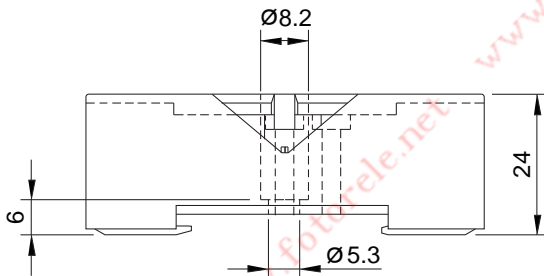

### Specifications

**Nominal Load:** 10 A/250 V

#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	





# S3-MP



Three pole, one level  
Accepts plug-in modules M3P  
in parallel with the coil


**10 A 250 V**

**Socket for MRC, 11-Pin Plug-In Relay Types  
C3-A30, C3-G30, C3-T31, C3-X10, C3-M10,  
C3-R20, C3-E24, C3-N34**


- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

## Wiring Diagram

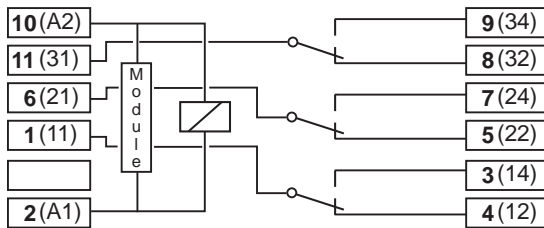

## Dimensions - mm

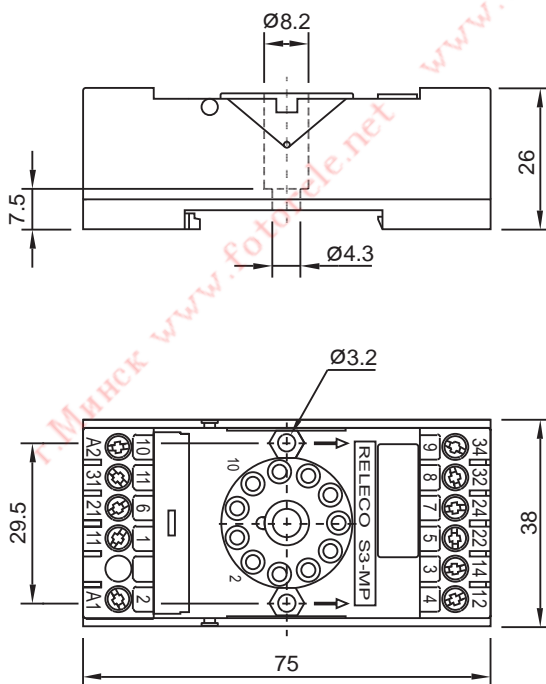

## Specifications

**Nominal Load:** 10 A/250 V

### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	





# S4-J



Four pole, two level, logic wiring  
Integrated clip and marking label


**10 A 250 V**

**Socket for MRC, 14-Pin Plug-In Relay Types  
C4-A40, C4-X20, C4-T31, C4-R30**



- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947

## Wiring Diagram

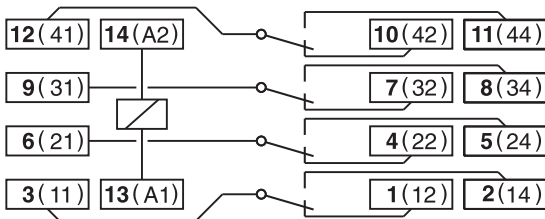

## Dimensions - mm

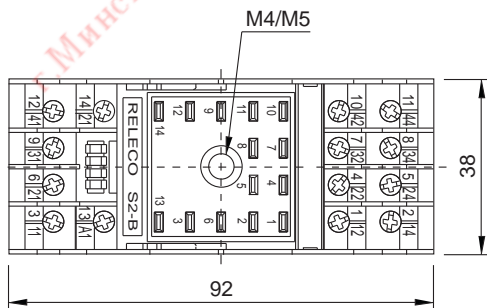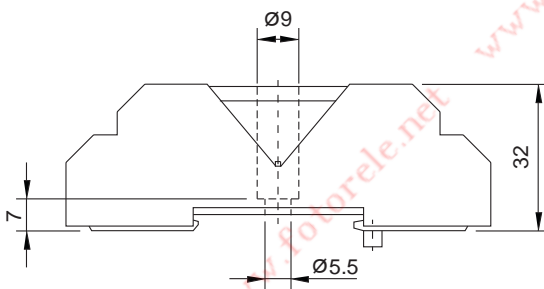

## Specifications

**Nominal Load:** 10 A/250 V

### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	24-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	



**S4-L** 4-Pole Flange  
Panel Mountable

**S4-PO** 4-Pole Printed Circuit  
with Flange

**S5-L** 3-Pole Flange  
Panel Mountable

**S5-P** 3-Pole Printed Circuit  
with Flange

**S5-PO** 3-Pole Printed Circuit  
with Flange




**Specifications**

Nominal Load 10 A/250 V  
Dielectric Strength Adjacent Pin 2.5 KV


**Specifications**

Nominal Load 16 A/400 V  
Dielectric Strength Adjacent Pin 4 KV


**Printed Circuit Lay-Out**






**Printed Circuit Lay-Out**

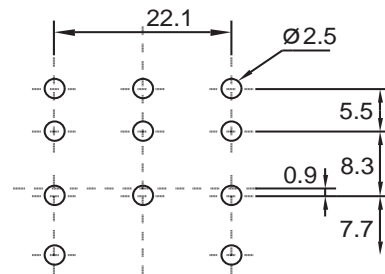

**Dimensions - mm**

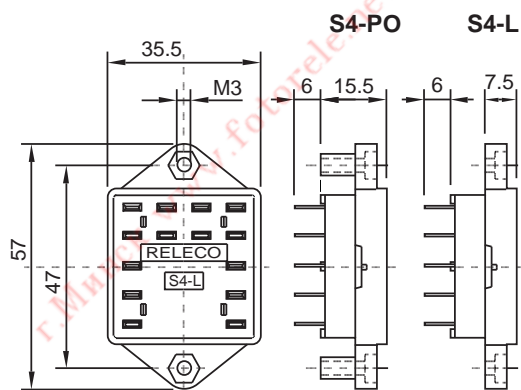

**Dimensions - mm**

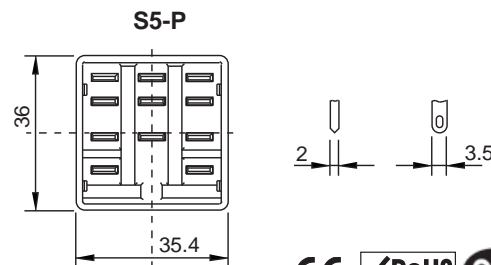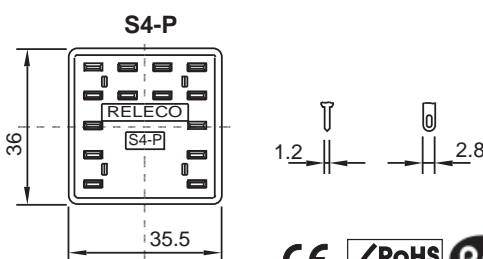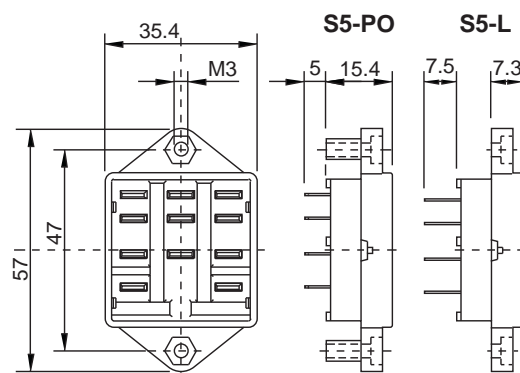



# S5-S



Three pole, two level, logic wiring  
Integrated clip and marking label


16 A 400 V

Socket for MRC, 11-Pin Plug-In Relay Types  
C5-A20, C5-A30, C5-G30, C5-X10, C5-M10,  
C5-M20, C5-R20



- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

## Wiring Diagram

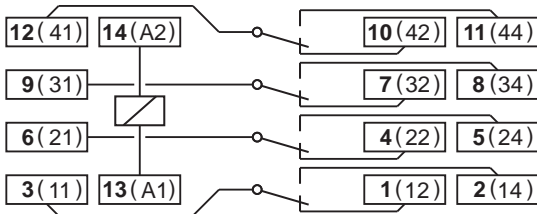

## Dimensions - mm

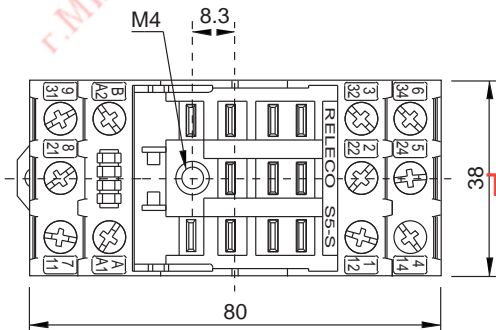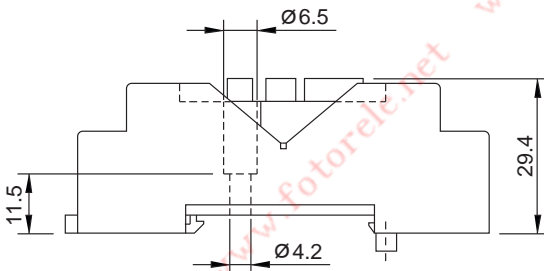

## Specifications

Nominal Load: 16 A/400 V

### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	4 KV
Between all terminals and rail DIN	4 KV
Between adjacent poles	4 KV

### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	



г.Минск [www.fotorele.net](http://www.fotorele.net)

[www.tiristor.by](http://www.tiristor.by) email [minsk17@tut.by](mailto:minsk17@tut.by)

тел.+375447584780





# S7-M



Two pole, one level  
Integrated clip and marking label


**10 A 250 V**

**Socket for QRC, 2-Pole Plug-In Relay Types C7-A20, C7-T21, C7-G20, C7-X10, C7-W10**



- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

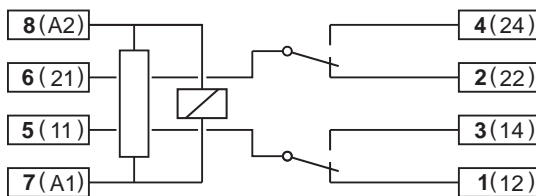

### Dimensions - mm

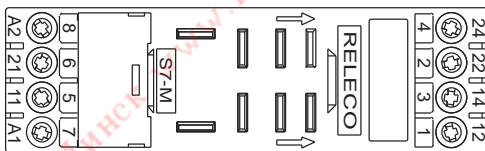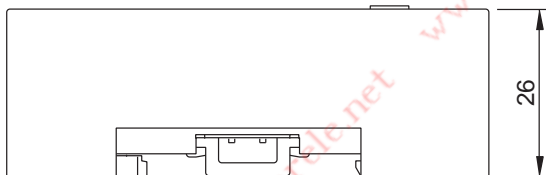

### Specifications

**Nominal Load:** 10 A/250 V


#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	



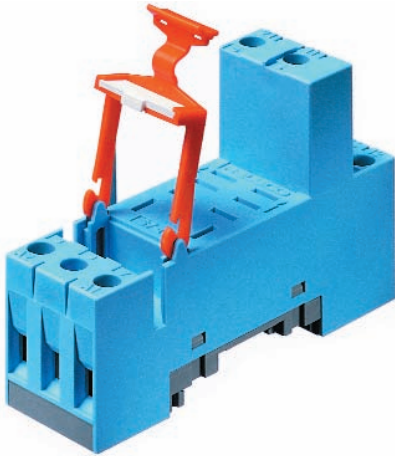

# S7-I/O



Two pole, one level  
Integrated clip and marking label


**10 A 250 V**

## Socket for QRC, 2-Pole Plug-In Relay Types C7-A10




- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

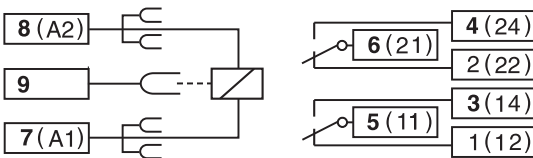

### Dimensions - mm

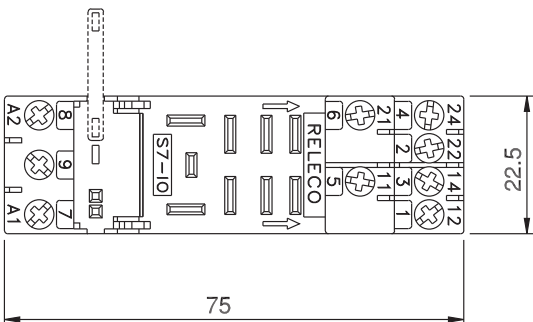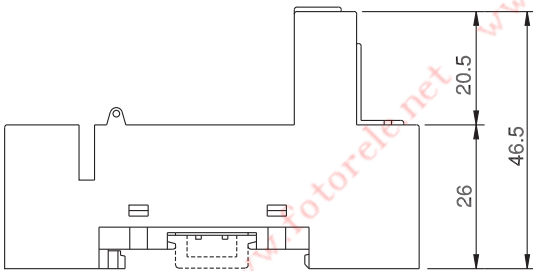

### Specifications

**Nominal Load:** 10 A/250 V

#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	





# S7-16



One pole, one level  
Integrated clip and marking label


**16 A 250 V**

## Socket for MRC, 1-Pole Plug-In Relay Types C7-A10

- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering


According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

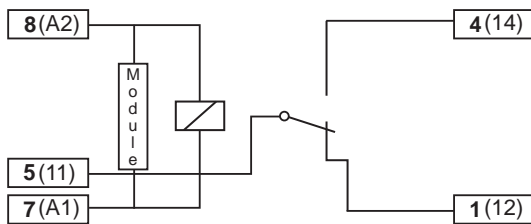

### Dimensions - mm

#### S7-16 for use with C7-A10 (16A)

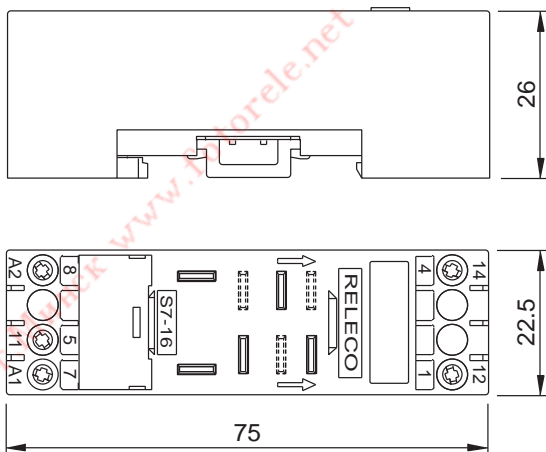

### Specifications

**Nominal Load:** 16 A/250 V

#### Insulation:

Dielectric strength, 1 minute	2.5 KV
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	





**S7-P** 2-Pole Printed Circuit

**S7-PO** 2-Pole Printed Circuit with Flange

**S9-P** 4-Pole Printed Circuit

**S9-PO** 4-Pole Printed Circuit with Flange



S7-P



S7-PO



S9-PO



S9-P


**Specifications**

Nominal Load 10 A/250 V  
Dielectric Strength Adjacent Pin 2.5 KV


**Specifications**

Nominal Load 6 A/250 V  
Dielectric Strength Adjacent Pin 2.5 KV

**Printed Circuit Lay-Out**








**Printed Circuit Lay-Out**

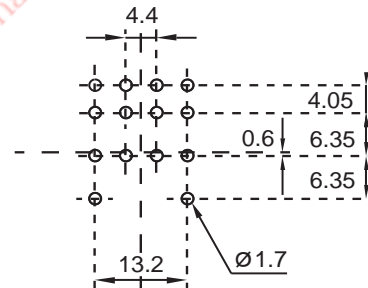

**Dimensions - mm**

**Dimensions - mm**

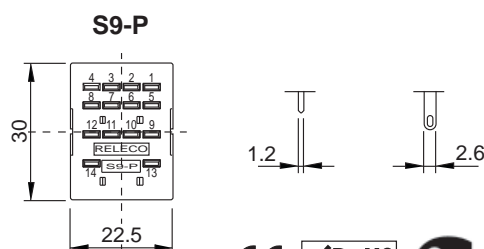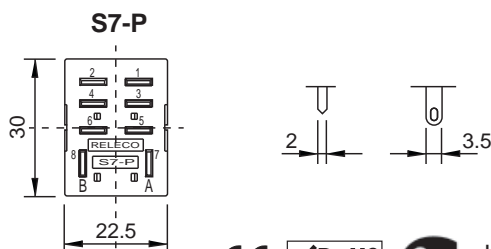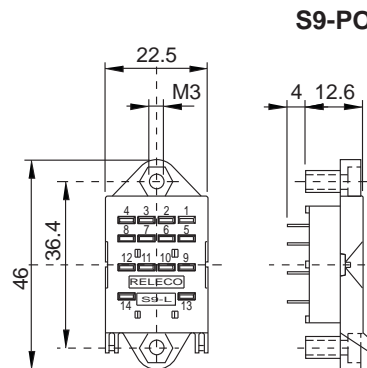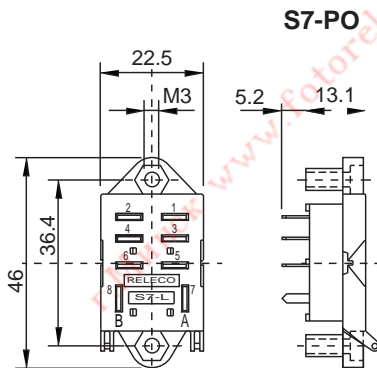

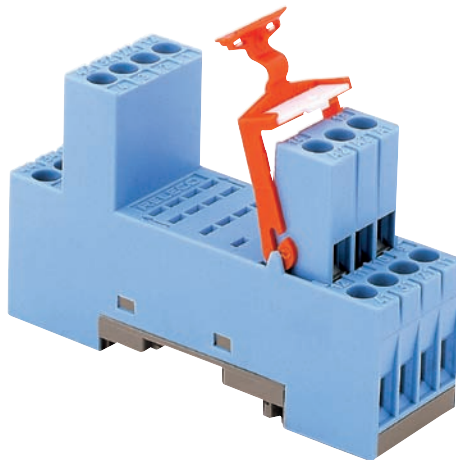

# S9-M



Four pole, two level  
Integrated clip and marking label


6 A 250 V

## Socket for QRC, 4-Pole Plug-In Relay Types C9-A41, C9-E21, C9-R21



- DIN rail or panel mountable
- Removable label
- EN/DIN and sequential numbering

According to EN 60947-1 and IEC 61810-5

### Wiring Diagram

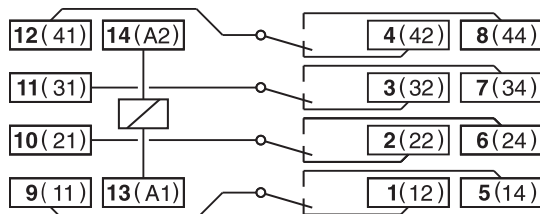

### Dimensions - mm

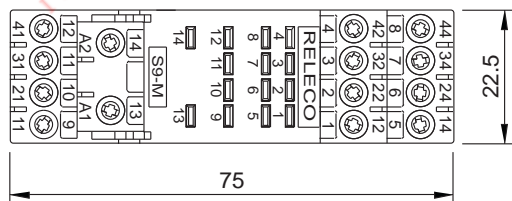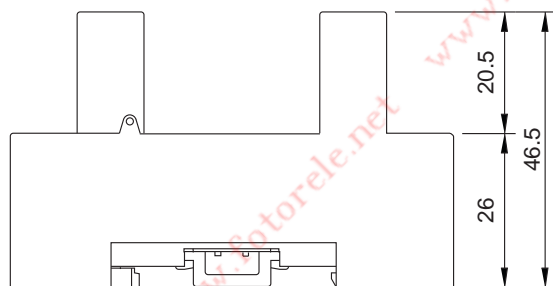

### Specifications

Nominal Load: 6 A/250 V


#### Insulation:

Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2000 V

#### Wire In-Lets Capacity:

Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi-core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
Removable marking label	



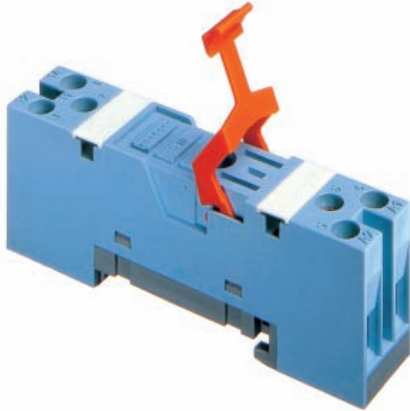

# S10



Socket for C10-C14-CSS relays  
DIN rail or panel mountable


10 A 250 V

Interface I/O socket, with terminals in-line for relays C10A, C10G, C10T, CSS




### Specifications

Poles	1
Nominal load	10 A/250 V
Dielectric strength	
Coil - contacts	5 KV
Terminals - Rail	5 KV
Max. screw torque	1.2 Nm
Multi-core capacity	22-14 AWG
Solid wire capacity	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Weight average	28 g

### Wiring Diagram

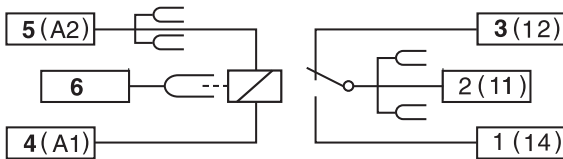

### Dimensions - mm

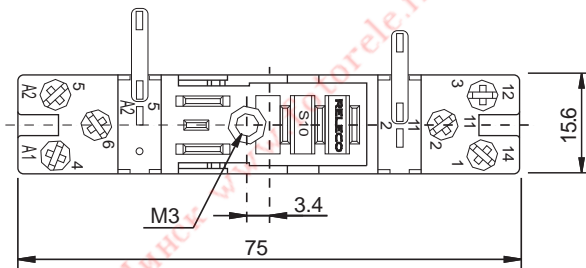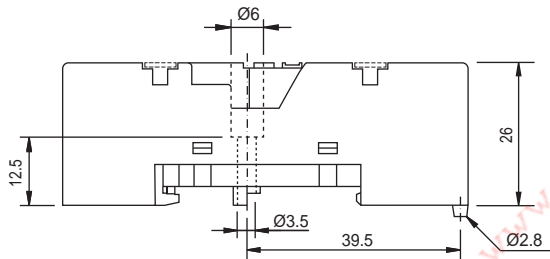

Bridge Bus Bar S10-BB


### Other Aspects

- Hard brass tin-plated terminals
- Brass zinc-plated solid screws
- Integrated clip
- Removable marking label

### Accessories

- Bridge bar for coil and movable contact (S10-BB)
- Integrated clip
- DIN rail or panel mounting
- Maximum current through bridge 10 A
- Maximum current input common cable 20 A



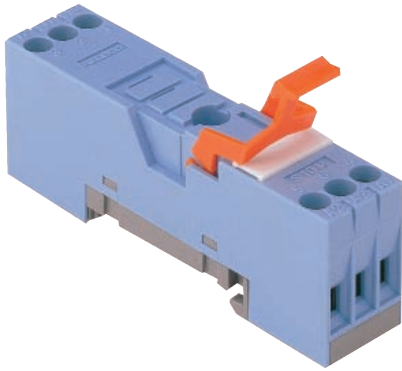

# S10-M

New I/O socket for IRC relays one change-over contact

16 A 250 V


I/O socket, with terminals in-line for relays C10A, C10G, C10T, C14A, C14G, C16A, C16G and CSS

Both this socket and the S12 are designed to get a homogeneous set with identical terminal disposition, which allows the easy identification of the contacts set in each level and a simpler wiring.




Both A2 terminals allow a secure interconnection through external bridges among an unlimited number of these sockets or a mixture of S10-M and the S12.

The A2 terminal, free on both the first and last sockets, is used to connect the cable of common polarity.

## Wiring Diagram

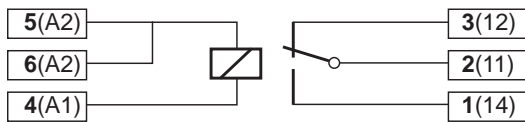


## Dimensions - mm

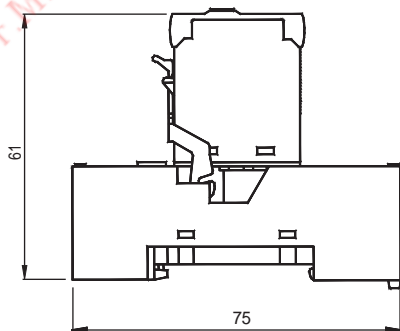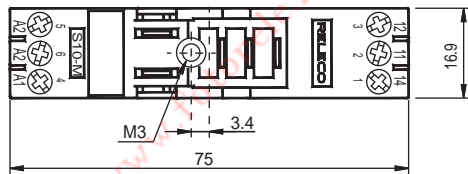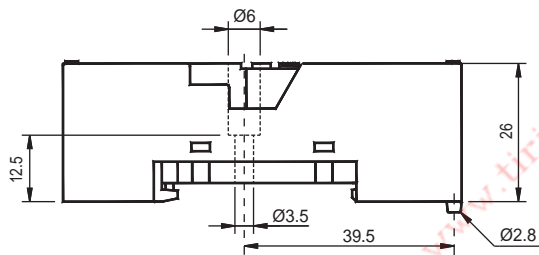

## Specifications

Nominal load	16 A/250 V
Insulation: Dielectric strength, 1 minute	
Between coil and contacts	5 KV
Between all terminals and rail DIN	5 KV
Max. screw torque	1.2 Nm
Screw dimensions	M3, Pozi
Wire in-lets capacity:	
Solid wire	4 mm <sup>2</sup> or 2 x 2.25 mm <sup>2</sup>
Multi - core	22-14 AWG
Ferrule tip terminals	4 mm <sup>2</sup>
Integrated hold-down clip	
Removable marking label	

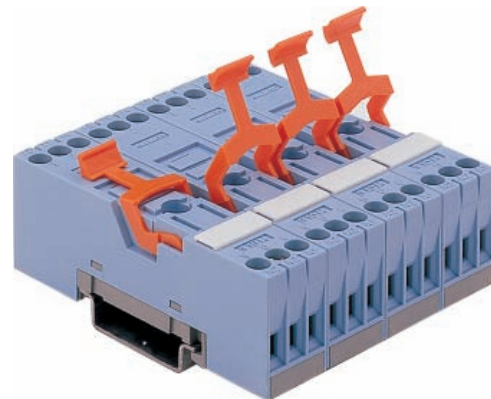

# S10-P



Printed circuit socket for 1 pole  
IRC Relays



# S12-P



Printed circuit socket for 2-pole  
IRC Relays







### Specifications

Nominal load	10 A/250 V
Dielectric strength, 1 min.	
Coil terminals to contacts	5KV
Hard brass tin-plated terminals	0.5 x 1 mm
Integrated hold-down clip	


### Specifications

Nominal load 5 A/250 V	
Dielectric strength 1 min.	
Coil terminals to contacts	5KV
Hard brass tin-plated terminals	0.5 x 1 mm
Integrated hold-down clip	

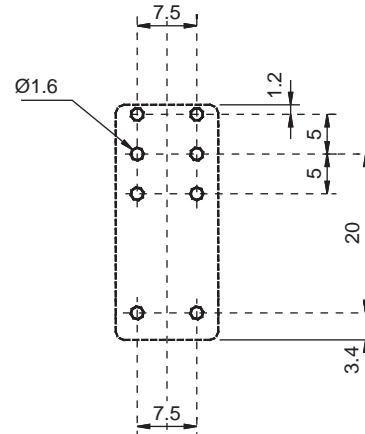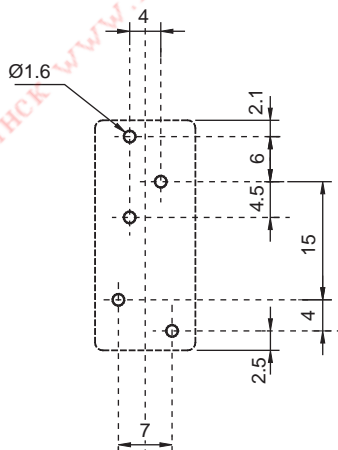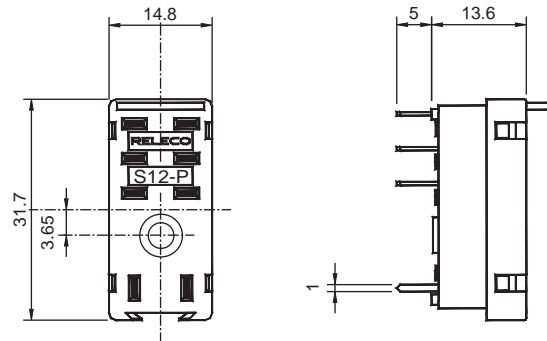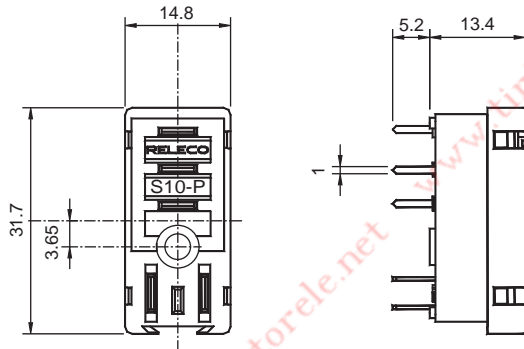

IEC 61810 EN 60947



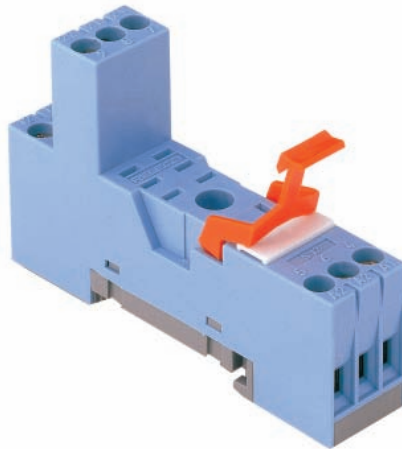

# S12



New I/O socket for IRC relays two pole, change-over contacts

5 A


New I/O socket with terminals in-line, for relays C12, C12G, C15 and C15G

Both this socket and the S10-M are designed to get a homogeneous set with identical terminal disposition, which allows easy identification of the contacts set in each level and simpler wiring.




Both A2 terminals allow a secure interconnection through external bridges among an unlimited number of these sockets or a mixture of S12 and the S10-M.

The A2 terminal, free on both the first and last sockets, is used to connect the cable of common polarity.

### Wiring Diagram

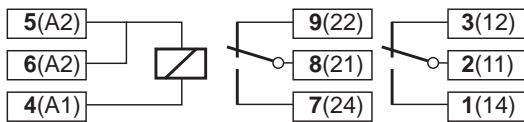

### Dimensions - mm

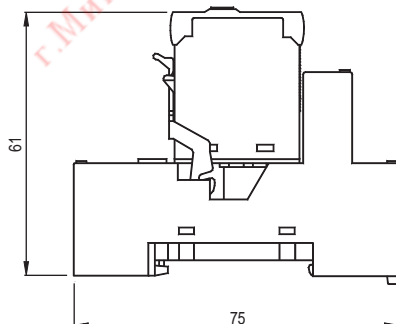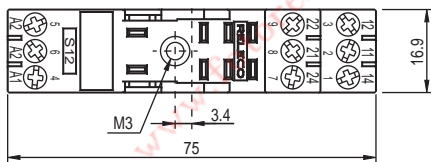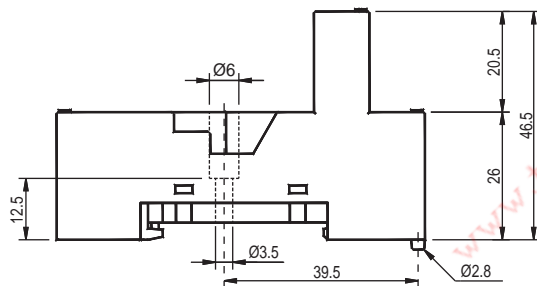

### Specifications

Poles Two change-over contacts  
Nominal load 5 A/250V

#### Insulation:

Between coil and contacts 5 KV  
Between every terminal and DIN rail 5 KV  
Between adjacent contacts 3 KV

Max. screw torque 1.2 Nm


Wire in-lets multi-core capacity 22-14 AWG

Solid wire or ferrule tips capacity 4 mm<sup>2</sup>

Solid terminals of zinc-plated brass

Integrated hold-down clip


Removable marking label

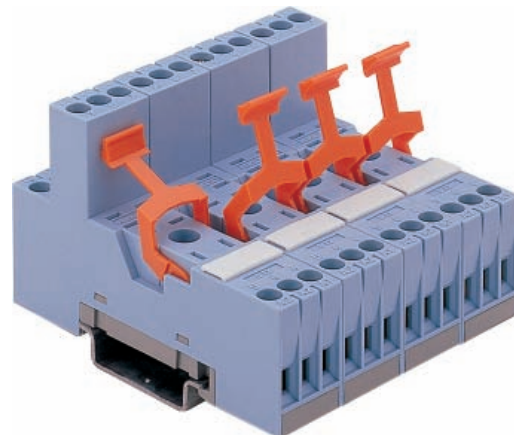


Notes:

г.Минск [www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) email [minsk17@tut.by](mailto:minsk17@tut.by) тел.+375447584780

# TIMERS

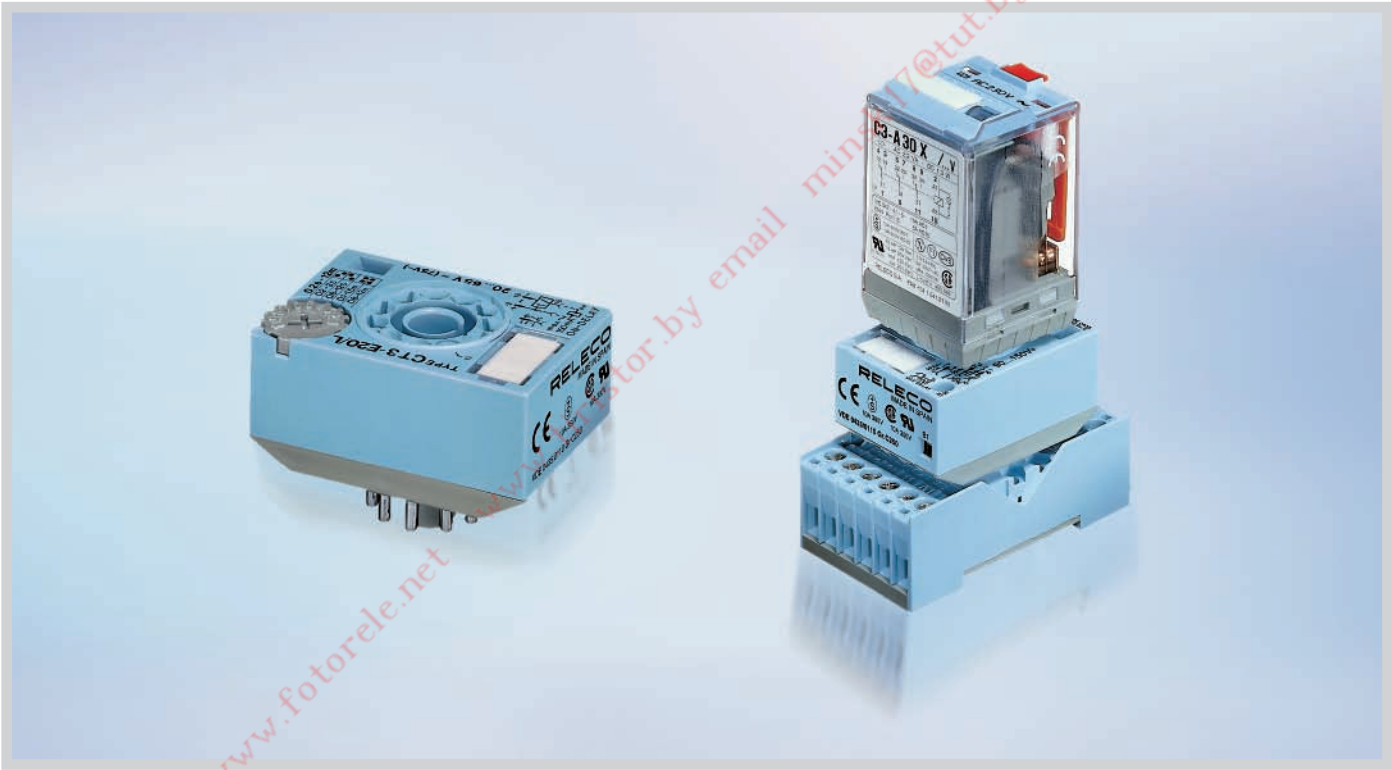

г.Минск www.fotorele.net min77@tut.by email min77@tut.by тел.+375447584780

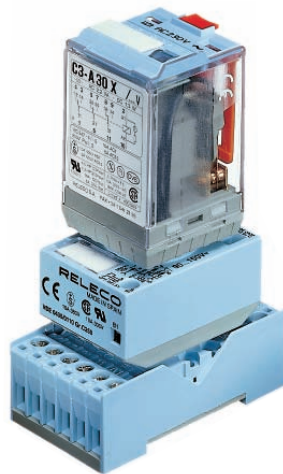

The modules **CT 2** and **CT 3** are electronic timers that are designed to be inserted between a standard plug-in relay and its socket, enabling the relay to be operated as a timer relay.


The **CT** modules are able to accept any standard 8 or 11-Pin RELECO series C2 or C3 as well as those from any other supplier.

The relay coil voltage must be in the range shown for each model.

## CT 2A CT 3A

Off delay

The timing starts when S is switched off. The relay drops out at time (t).




- CT 2-A30/S\* .....9.5-18 V
- CT 2-A30/L .....20-65 V
- CT 2-A30/M .....90-150 V
- CT 2-A30/U .....180-265 V

- CT 3-A30/S\* .....9.5-18 V
- CT 3-A30/L .....20-65 V
- CT 3-A30/M .....90-150 V
- CT 3-A30/U .....180-265 V

## CT 2B CT 3B

Blinker

The relay blinks ON/OFF at time (t) when switch S is closed. First pulse, ON.




- CT 2-B30/S\* .....9.5-18 V
- CT 2-B30/L .....20-65 V
- CT 2-B30/H .....90-265 V

- CT 3-B30/S\* .....9.5-18 V
- CT 3-B30/L .....20-65 V
- CT 3-B30/H .....90-265 V

## CT 2E CT 3E

On delay

The timing starts when the switch S is closed. The relay pulls in at the time (t).



- CT 2-E30/S\* .....9.5-18 V
- CT 2-E30/L .....20-65 V
- CT 2-E30/H .....90-265 V

- CT 3-E30/S\* .....9.5-18 V
- CT 3-E30/L .....20-65 V
- CT 3-E30/H .....90-265 V

\*All types are for AC/DC except "S" voltage range (only DC)

## CT2... (8-Pin) and CT3... (11-Pin) types with time range from 0.2 seconds to 30 minutes (range 30)

### Specifications

<b>Time accuracy</b>	
Repetition	+0.5%/20 ms
Supply voltage	1 ms / volt.
Ambient temperature	-0.25% / K
Reset time (types E, W, B)	<150 ms
Reset time (types A, K)	<200 ms
Triggering time: AC, 80 ms;	DC, 50 ms
Ambient temperature	-10°C to +60°C
Transient protection	IEC 255.4
Housing material	Noryl SE1 (UL94 V-1)
Protection class (DIN 40050)	IP 40
Weight avg.	35 g


### Time Range Setting


#### Range 30 Dip - Sw

0.2-3 s	
2-30 s	
0.2-3 min	
2-30 min	



### Dimensions

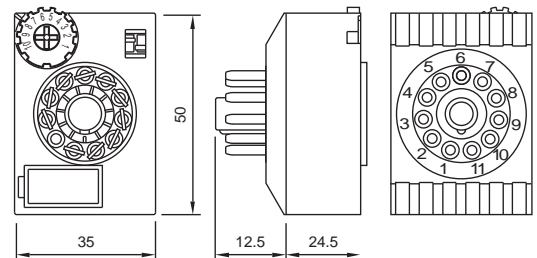

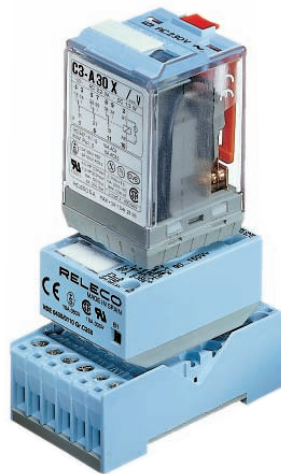

The modules **CT 2** and **CT 3** are electronic timers that are designed to be inserted between a standard plug-in relay and its socket, enabling the relay to be operated as a timer relay.


The **CT** modules are able to accept any standard 8 or 11-Pin RELECO series C2 or C3 as well as those from any other supplier.

The relay coil voltage must be in the range shown for each model.

## CT 2K CT 3K

One shot, aux. pulse

The relay turns ON with a pulse on the switch S and turns OFF at the time (t).




- CT 2-K30/S\* ..... 9.5-18 V
- CT 2-K30/L ..... 20-65 V
- CT 2-K30/M ..... 90-150 V
- CT 2-K30/U ..... 180-265 V

- CT 3-K30/S\* ..... 9.5-18 V
- CT 3-K30/L ..... 20-65 V
- CT 3-K30/M ..... 90-150 V
- CT 3-K30/U ..... 180-265 V

## CT 2W CT 3W

One shot

The relay turns ON as switch S is closed and turns OFF at the time (t).



- CT 2-W30/S\* ..... 9.5-18 V
- CT 2-W30/L ..... 20-65 V
- CT 2-W30/H ..... 90-265 V

- CT 3-W30/S\* ..... 9.5-18 V
- CT 3-W30/L ..... 20-65 V
- CT 3-W30/H ..... 90-265 V

\*All types are for AC/DC except "S" voltage range (only DC)

### CT2... (8-Pin) and CT3... (11-Pin) types with time range from 0.2 seconds to 30 minutes (range 30)

#### Specifications

##### Time accuracy

Repetition	+0.5%/20 ms
Supply voltage	1 ms / volt.
Ambient temperature	-0.25% / K
Reset time (types E, W, B)	<150 ms
Reset time (types A, K)	<200 ms
Triggering time: AC, 80 ms;	DC, 50 ms
Ambient temperature	-10°C to +60°C
Transient protection	IEC 255.4
Housing material	Noryl SE1 (UL94 V-1)
Protection class (DIN 40050)	IP 40
Weight avg.	35 g


#### Time Range Setting

##### Range 30 Dip - Sw

0.2-3 s	
2-30 s	
0.2-3 min	
2-30 min	




#### Dimensions

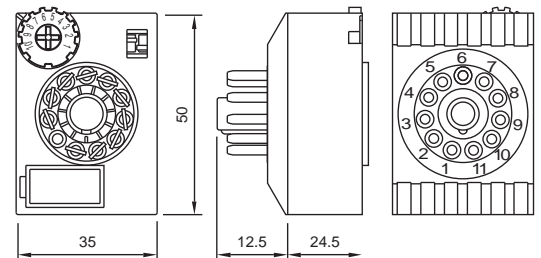

Notes:

г.Минск [www.fotorele.net](http://www.fotorele.net) [www.tiristor.by](http://www.tiristor.by) email [minsk17@tut.by](mailto:minsk17@tut.by) тел.+375447584780

# RINT

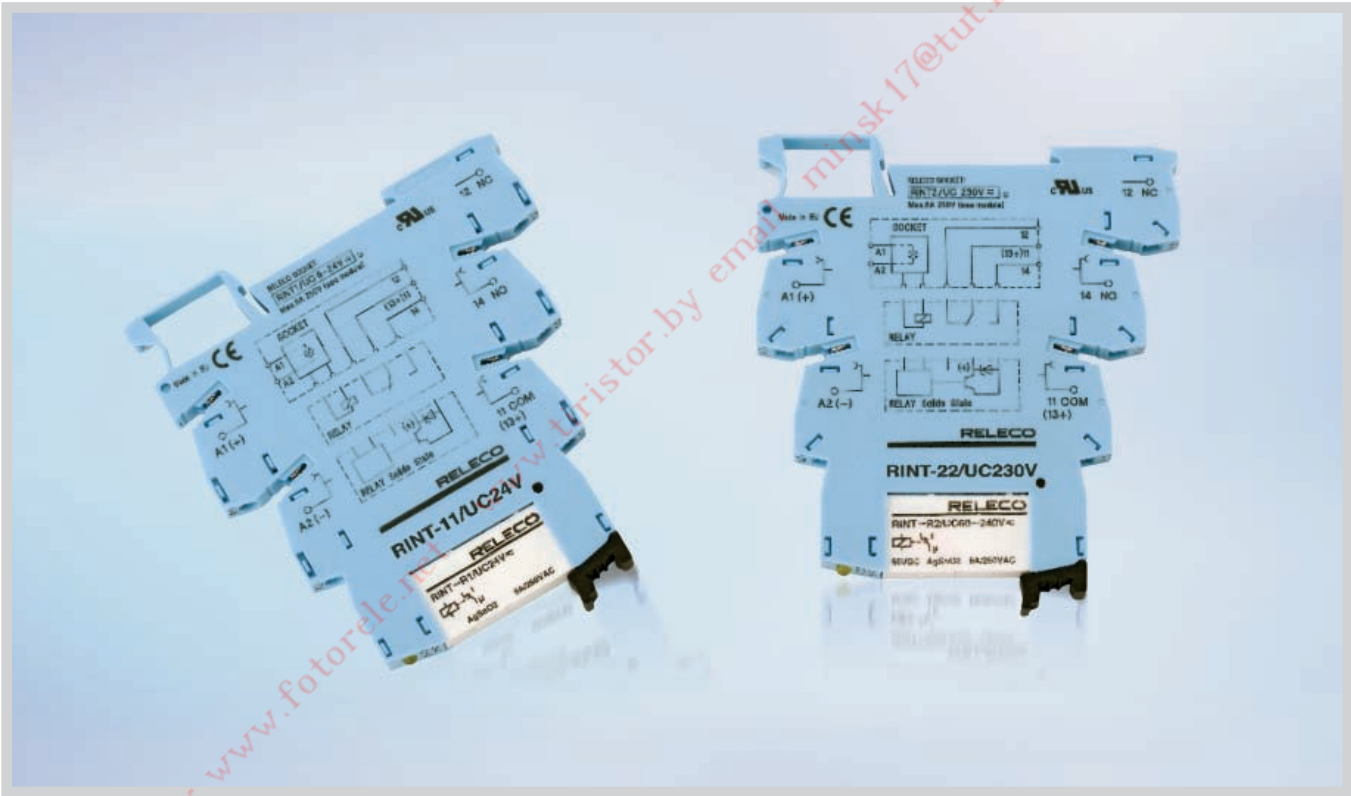

г. Минск www.fotorele.by ristor.by email: minsk17@tut.by тел. +375 44 758 4780


**RINT Relay and Accesories Part Number Key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.



RINT interface relays consist of two components:

- Relay
- Socket

**Complete Relay Module (Relay and Socket 6.2 mm) Part Number Key**

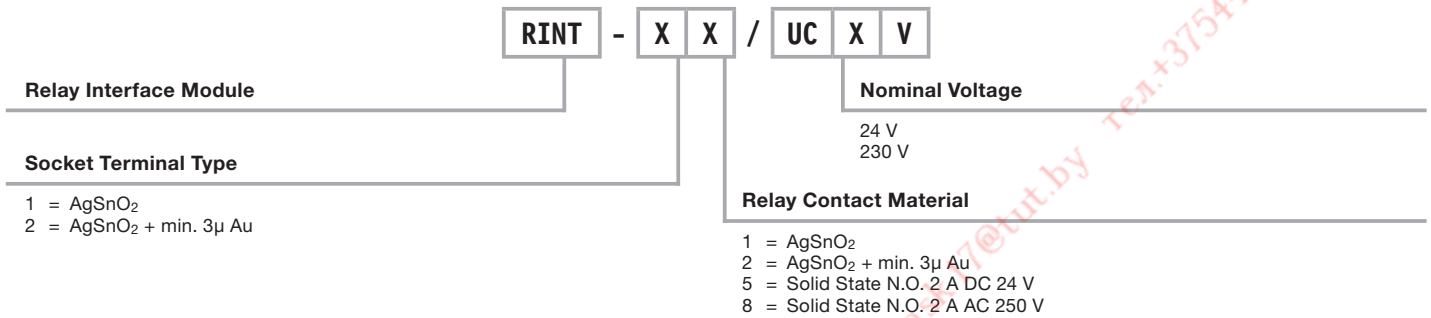

**Relay Part Number Key**

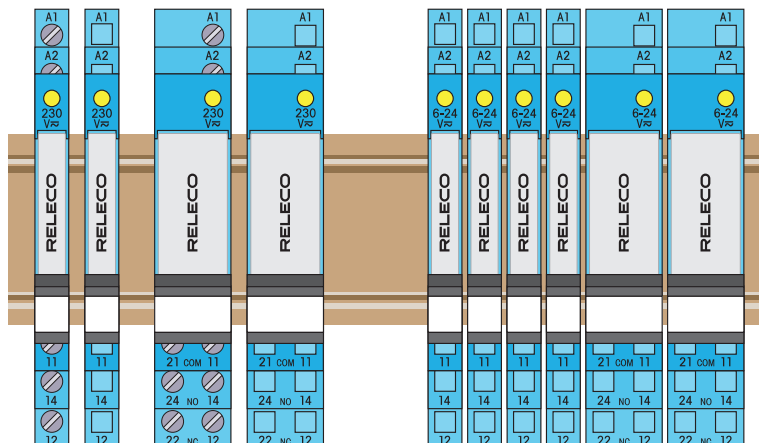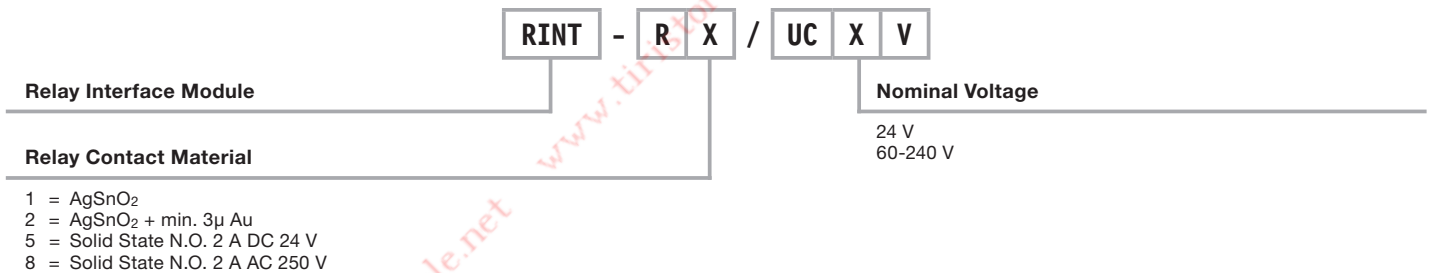





RELAY + SOCKET	DESCRIPTION
RINT-11 / UC24V	Screw terminal AgSnO <sub>2</sub>
RINT-21 / UC24V	Cage clamp AgSnO <sub>2</sub>
RINT-11 / UC230V	Screw terminal AgSnO <sub>2</sub>
RINT-21 / UC230V	Cage clamp AgSnO <sub>2</sub>
RINT-12 / UC24V	Screw terminal AgSnO <sub>2</sub> +3μ Au
RINT-22 / UC24V	Cage clamp AgSnO <sub>2</sub> +3μ Au
RINT-12 / UC230V	Screw terminal AgSnO <sub>2</sub> +3μ Au
RINT-22 / UC230V	Cage clamp AgSnO <sub>2</sub> +3μ Au
RINT-15 / UC24V	Solid State screw terminal, DC loads
RINT-25 / UC24V	Solid State cage clamp, DC loads
RINT-18 / UC24V	Solid State screw terminal, AC loads
RINT-28 / UC24V	Solid State cage clamp, AC loads


RELAY	DESCRIPTION
RINT-R1/UC24V	Relay module contacts AgSnO <sub>2</sub>
RINT-R1/UC60-240V	Relay module contacts AgSnO <sub>2</sub> + 3μ Au
RINT-R2/UC60-240V	Relay module contacts AgSnO <sub>2</sub> + 3μ Au
RINT-R5/DC24V	Solid State relay module, DC loads
RINT-R8/DC24V	Solid State relay module, AC loads

BRIDGES	ACCESORIES
RINT-BR1-500B	Blue bridges (1 unit, 500 mm)
RINT-BR1-500G	Grey bridges (1 unit, 500 mm)
RINT-BR2-06G/10	Grey bridges (10 units)
RINT-BR2-06B/10	Blue bridges (10 units)
RINT-BR2-06R/10	Red bridges (10 units)

LABELS	ACCESORIES
RINT-MA6-0/100	Labels (100 units)

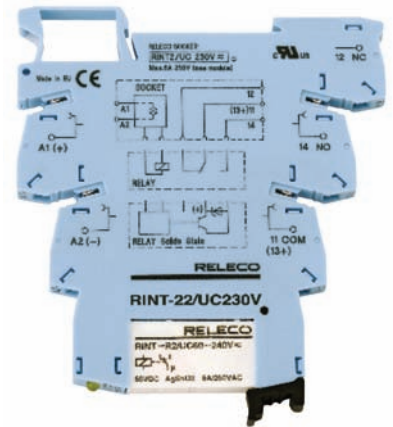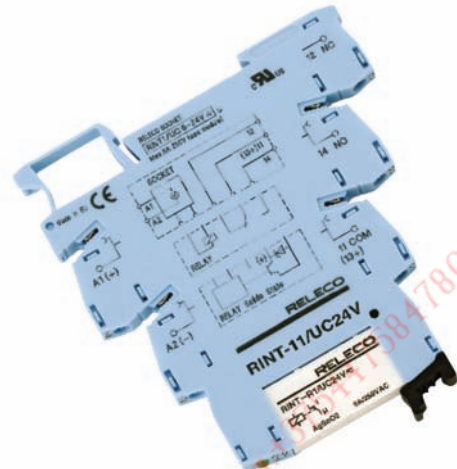

- Relay module up to 6 A 250 V, different contact material
- Solid state modules DC, AC up to 2 A
- Coil UC = AC/DC, not polarised, integrated freewheeling circuit
- LED status display
- Screw terminals or spring cage terminals
- Optional coloured bridges for different connections
- Narrow mounting 6.2 mm

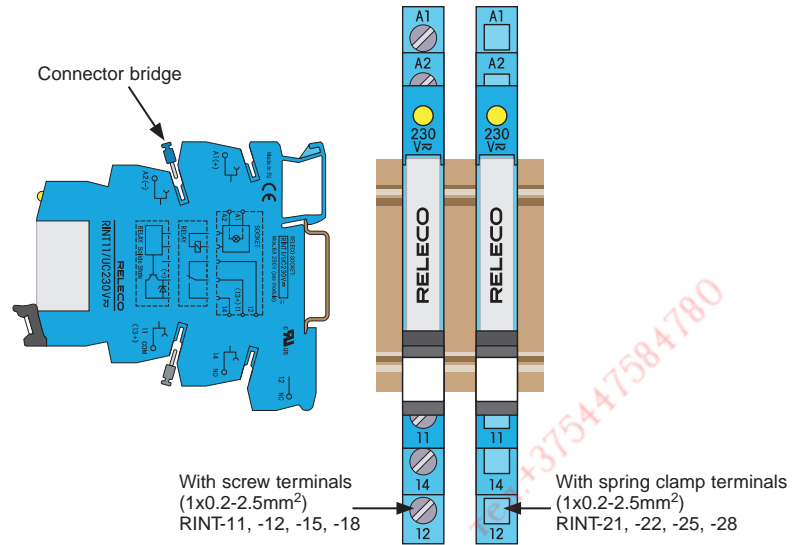

### Interface module

Complete with integrated LED and switching module

### RINT-11, RINT-21

#### Interface module

for PLC's and process control. High power contact gSnO<sub>2</sub>. With screw terminals (RINT-11) or spring cage terminals (RINT-21). No external freewheeling circuit required. Bridges optional.

### RINT-12, RINT-22

#### Interface module

Specially for PLC, process controls with DC currents. Contact AgSnO<sub>2</sub>+3μAu. With screw terminals (RINT-12) or spring cage (RINT-22). No external freewheeling circuit required. Recommended max. load 250V 6A resistive. Bridges optional.



Technical data (Tamb 20°C)

Contact type/material  
Switching power AC1  
Switching power DC1 24V/230V  
Switching power AC15  
Peak inrush current  
Switching cycles: mech./elec.  
Isolation EN 61810-5

Operation voltage AC50/60Hz/DC  
Power consumption Pmax. 24V/230V  
On delay/release time  
Temp.: operating/(storage)

**6 A 250 V ~**

100 mA / 12 V

CO/AgSnO<sub>2</sub>  
1500 W  
140 W / 40 W  
NO 750 W / NC 375 W  
10 A / 4 s  
10x10<sup>6</sup> / 10<sup>5</sup>  
4 kV

-20 to +100%  
170 / 217 mW  
5 ms / 2.5 ms  
-40°C to 80°C/-40°C to 85°C

**6 A 250 V ~**

100 mA / 12 V

CO/AgSnO<sub>2</sub> + 3μAu  
1500 W  
140 W / 40 W  
-  
10 A / 4 s  
10x10<sup>6</sup> / 10<sup>5</sup>  
4 kV

-20 to +100%  
170 / 217 mW  
5 ms / 2.5 ms  
-40°C to 80°C/-40°C to 85°C

Ordering-No.

UC  $\sim$   
50/60Hz/  $\infty$

24, 230  
RINT-11/UC.....V  
RINT-21/UC.....V


24, 230  
RINT-12/UC.....V  
RINT-22/UC.....V

DC  $\equiv$   
 $\leq 10\%$

Replacement Relay


RINT-R1/UC60-240V  
RINT-R1/UC24V

RINT-R2/UC60-240V  
RINT-R2/UC24V

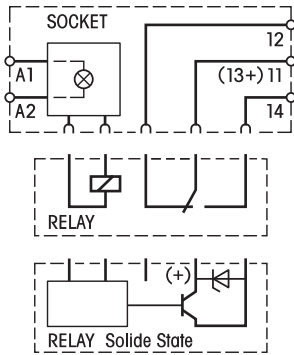

Relay module  
RINT-R1; RINT-R2

Solid-state module  
RINT-R5; RINT-R8

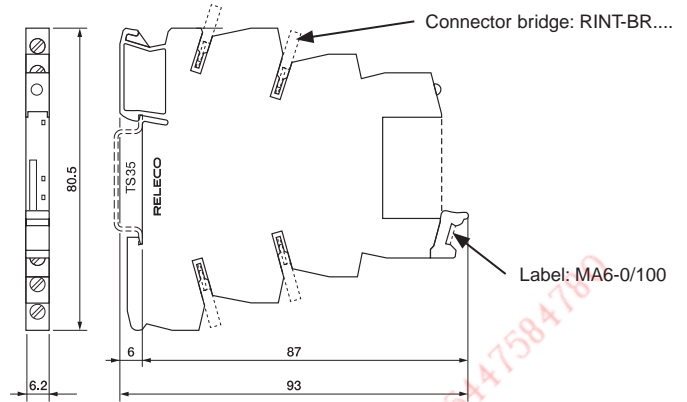

RINT-15, RINT-25	RINT-18, RINT-28	Order Example:
<b>Solid State Interface module</b> for PLC's and process control. DC solid state switch, type NO. For fast and high frequently switching. With screw terminals (RINT-15) or spring cage terminals (RINT-25). Bridges optional.	<b>Interface module</b> for PLC's and process control. AC output interface 0 synchronous switching NO for resistive or similar load. (No transformer rec.) With screw terminals (RINT-18) or spring cage terminals (RINT-28). Bridges optional.	Interface module RINT-21/UC24V  Connector bridge RINT-BR2-6B/10 (packing unit: 1x10 pieces)  Replacement relay RINT-R1/UC24V
<b>2 A 24 V ~</b>	<b>2 A 240V ==</b>	<b>Accessories:</b>
0.05 mA / 12 V	25 mA / 12 V	<b>Label:</b> RINT-MA6-0/100 (100 pieces)
NO / Solide-state DC - 48 W - - 2.5 kV	NO / Solide-state AC (triac) 480 W - 40 A / 20 ms - 2.5 kV	<b>Bridges:</b> 500mm blue: RINT-BR1-500B (1 piece) 500mm grey: RINT-BR1-500G (1 piece) 6mm blue: RINT-BR2-6B/10 (10 pieces) 6mm grey: RINT-BR2-6G/10 (10 pieces) 6mm red: RINT-BR2-6R/10 (10 pieces)
-37 to +25% 185 mW <60 μs / <600 μs -30°C to 80°C/-40°C to 100°C	-37 to +25% 185 mW <60 μs / <600 μs -30°C to 80°C/-40°C to 100°C	
<b>24, 230</b> RINT-15/DC...V RINT-25/DC...V	<b>24, 230</b> RINT-18/DC...V RINT-28/DC...V	
<b>RINT-R5/DC24V</b>	<b>RINT-R8/DC24V</b>	



## USA

TURCK Inc.  
3000 Campus Drive  
Minneapolis, MN 55441  
Phone: (763) 553-7300  
Fax: (763) 553-0708  
Application Support:  
1-800-544-7769  
E-mail: turckusa@turck.com  
www.turck.us



## MEXICO

TURCK MEXICO S. DE R.L. DE C.V.  
Carr. Saltillo-Zacatecas km 4.5 s/n  
Parque Industrial "La Angostura"  
Saltillo, COAH. C.P. 25070  
Mexico  
Phone: +52 (844) 411-6650/46  
Fax: +52 (844) 482-6926  
Local Toll Free: 01-800-01-88725  
E-mail: ventasmexico@turck.com



## CANADA

CHARTWELL ELECTRONICS, INC.  
140 Duffield Drive  
Markham, Ontario  
Canada, L6G 1B5  
Phone: (905) 513-7100  
Fax: (905) 513-7101  
Toll Free: 1-877-513-7769



## AUSTRALIA

TURCK Australia Pty. Ltd.  
Unit 5, 6-7 Gilda Court  
Mulgrave, Victoria 3170  
Australia  
Phone: (+61) 3 9560 9006  
Fax: (+61) 3 9560 1620  
Local Toll Free: 1300 132566  
E-mail: turckaustralia@turck.com



## GERMANY

### WORLD HEADQUARTERS


Hans TURCK GmbH & Co. KG  
Witzlebenstrasse 7  
D-45472 Muelheim an der Ruhr  
Federal Republic of Germany  
Phone: (+49) 208-49 52-0  
Fax: (+49) 208-49 52 264

www.turck.com

....**Sense It!**....**Connect It!**....**Bus It!**....**Solve It!**™

Реле RELECO, купить в Минске tel. +375447584780  
www.fotorele.net www.tiristor.by радиодетали, электронные компоненты  
email minsk17@tut.by tel.+375 29 758 47 80 МТС

Реле RELECO, купить , Минске, каталог, описание, технические, характеристики, datasheet,  
параметры, маркировка, габариты, фото, [QR код](#)

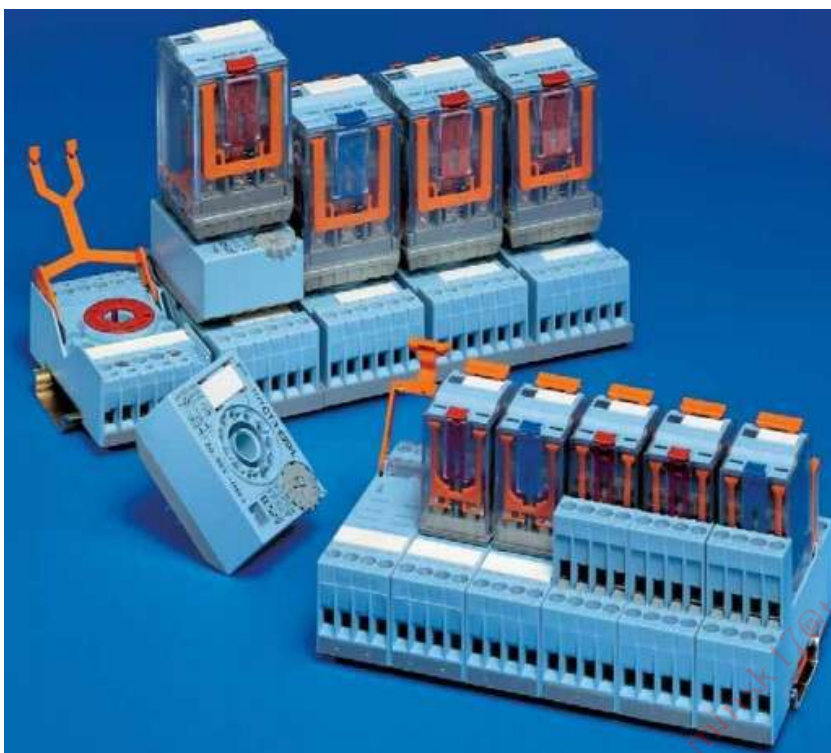

г. Минск www.fotorele.net www.tiristor.by email

www.tut.by тел.+375447584780