

Вентилятор ebmpapst, купить в Минске tel. +375447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты

email minsk17@tut.by tel.+375 29 758 47 80 МТС

[ebm papst, аналог, замена , Минске, каталог, описание, технические, характеристики, datasheet,](#)
[параметры, маркировка,габариты, фото,](#) [QR код](#)



www.tiristor.by

AC axial fans


Ø 130




- **Material:**
Wall ring: Die-cast aluminium, coated in black
Blades: Sheet steel, coated in black
Rotor: Open, coated in black
- **Number of blades:** 7
- **Direction of air flow:** "V", exhaust over struts
- **Direction of rotation:** Counter-clockwise, seen on rotor
- **Type of protection:** IP 20
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Motor protection:** TOP wired internally
- **Electrical connection:** Cable length 330 mm, beginning at wall ring
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST

| Nominal data | | Curve | Nominal voltage | Frequency | Air flow | Speed/rpm | Power input | Current draw | Capacitor | Sound pressure level | Max. operative range | Perm. amb. temp. | Mass | Electr. connection |
|-----------------|------------|-------|-----------------|-----------|----------|-----------|-------------|--------------|-----------|----------------------|----------------------|------------------|------|--------------------|
| Type | Motor | | VAC | Hz | m³/h | rpm | W | A | µF/VDB | dB(A) | Pa | °C | kg | p. 416 f. |
| W2S130-AA25 -01 | M2S 052-CA | A | 1~ 115 | 50 | 325 | 2800 | 41 | — | — | 49 | 80 | -25 to +60 | 1.1 | B) |
| | | | 1~ 115 | 60 | 380 | 3250 | 38 | — | — | 53 | 120 | -25 to +80 | | |
| W2S130-AA03 -01 | M2S 052-CA | A | 1~ 230 | 50 | 325 | 2800 | 45 | — | — | 49 | 80 | -25 to +50 | 1.1 | B) |
| | | | 1~ 230 | 60 | 380 | 3250 | 39 | — | — | 53 | 120 | -25 to +70 | | |

subject to alterations

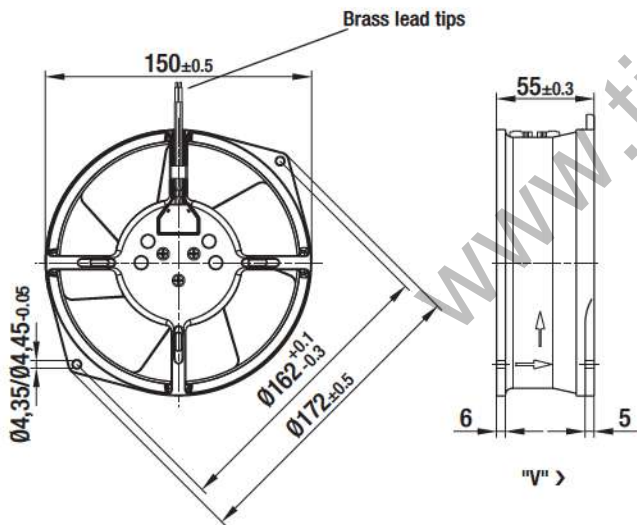

Curves

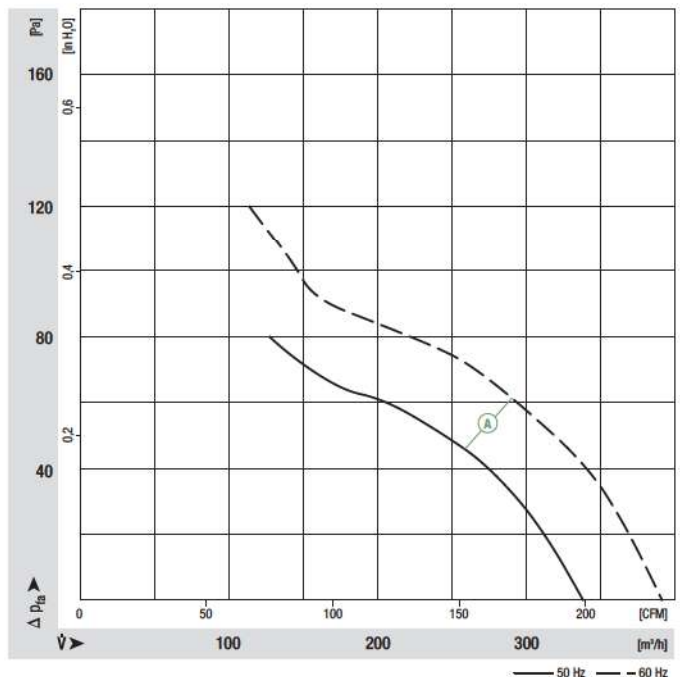

W2S130 Series

Tubeaxial

150Øx55mm





- AC fans with external rotor shaded-pole motor. Impedance protected against overloading.
- Die-cast aluminum housing. Impeller of sheet-steel, directly welded onto rotor.
- Rotational direction CCW looking at rotor.
- Cable length 330 mm as of wall ring.
- UL, CSA, VDE approvals on most models, please contact application engineering.

| Part Number | Curve | CFM @ 0 | VAC | Hertz* | Power (W) | dBa | Max Amb. Temp C | Bearing Type | Features | Wgt. (lbs) |
|----------------|-------|---------|---------|--------|-----------|-----|-----------------|--------------|-----------|------------|
| W2S130-AA25-01 | 1 | 223.6 | 115 | 60* | 38 | 53 | 80 | Ball | Leads | 2.44 |
| W2S130-AA25-44 | 1 | 223.6 | 115 | 60* | 38 | 53 | 80 | Ball | Terminals | 2.44 |
| W2S130-BM15-01 | 2 | 250.1 | 115 | 60* | 46 | 62 | 70 | Ball | Leads | 2.44 |
| W2S130-AA03-01 | 1 | 223.6 | 230 | 60* | 39 | 53 | 70 | Ball | Leads | 2.44 |
| W2S130-AA03-44 | 1 | 223.6 | 230 | 60* | 38 | 53 | 70 | Ball | Terminals | 2.44 |
| W2S130-BM03-01 | 2 | 250.1 | 230 | 60* | 46 | 62 | 70 | Ball | Leads | 2.44 |
| W2S130-AA03-49 | 1 | 223.6 | 115/230 | 50/60 | 38 | 53 | 70 | Ball | Leads | 2.44 |

* 50 Hz data available upon request

| Fan Type | Air Flow |
|-----------|---------------------|
| W2S130-AA | Exhaust over struts |
| W2S130-BM | Intake over struts |

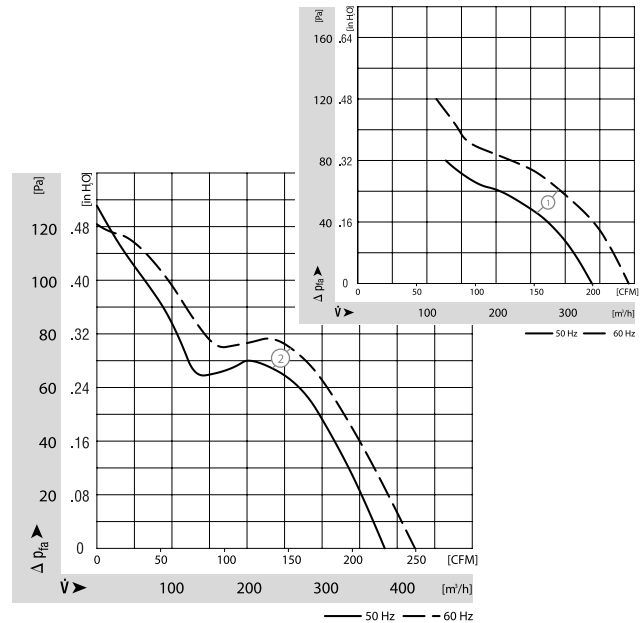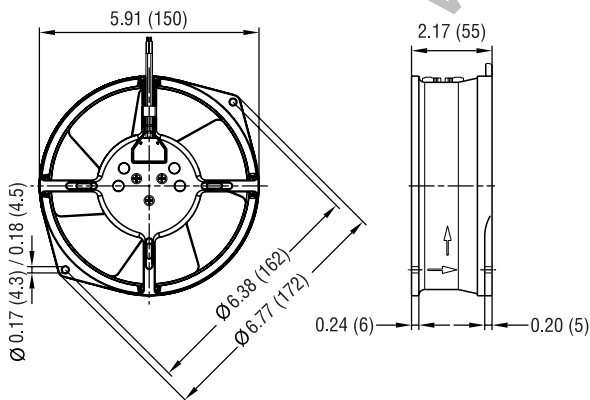

ebmpapst

e-mail: sales@us.ebmpapst.com · TEL: 860-674-1515 · FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2006 © ebm-papst Inc. reserves the right to change any specifications or data without notice

w2s130-aa03-01,

w2s130-aa03-71,

w2s130-ab03-13,

w2s130-aa03-01, вентилятор,

w2s130-aa75-a2,

w2s130-bm03-01,

w2s130-aa03-01, цена,

w2s130-aa03-87,

w2s130-aa03-21,

ebm-papst,

W2S130-AA25-65, W2S130-AA25-01, W2S130-AA03-49, W2S130-BM15-01, W2S130-BM03-01, W2S130-AA03-01,

W2S130-AA03-44, W2S130-AA25-44, W2S130-AA01-16, W2S130-AA03-64, W2S130-AA03-90, W2S130-AA19-38,

W2S130-AA25-76, W2S130-AB03-15, W2S130-AB03-21, W2S130-AA25-71, W2S130-AA03-77, W2S130-AB03-19,

W2S130-BM03-11, W2S130-AA25-64, W2S130-AB03-16, W2S130-AA57-A7, W2S130-AA25-97, W2S130-AB25-10,

W2S130-BM03-12, W2S130-AA03-80,

www.tiristor.by

Вентилятор ebmpapst, купить в Минске tel. +375447584780

www.fotorele.net www.tiristor.by радиодетали, электронные компоненты

email minsk17@tut.by tel.+375 29 758 47 80 МТС

[ebm papst, аналог, замена , Минске, каталог, описание, технические, характеристики, datasheet,](#)
[параметры, маркировка,габариты, фото,](#) [QR код](#)



www.tiristor.by